

528

UCI

Primary Rep
Deep Bot

Disposal of Plutonium
Atomic Pellets in Grout
out Canisters

Version

August 23,

Prepared

Ananda M. Wijesinghe

**DO NOT REMOVE
FROM READING ROOM**

Lawrence Livermo

PROPERTY OF
U.S. GOVERNMENT

DO NOT
REMOVE
FROM READING ROOM

The first part of the document discusses the importance of maintaining accurate records of all transactions. This includes not only sales and purchases but also any other financial activities that may occur during the course of the business. It is essential to ensure that all records are kept up-to-date and are easily accessible for review.

In addition, it is important to establish a clear system of internal controls to help prevent errors and fraud. This may involve implementing a strict policy regarding the handling of cash and other assets, as well as requiring proper authorization for all transactions.

Finally, it is crucial to regularly review the financial statements and compare them against the records to ensure that they are accurate and complete. This will help to identify any discrepancies and allow for prompt correction.

The second part of the document provides a detailed overview of the various financial statements that are used to track and report on the performance of a business. These include the balance sheet, the income statement, and the cash flow statement. Each of these statements provides a different perspective on the financial health of the company and is essential for making informed decisions.

The balance sheet shows the company's assets, liabilities, and equity at a specific point in time. It provides a snapshot of the company's financial position and is used to assess its solvency and ability to meet its obligations.

The income statement, also known as the profit and loss statement, shows the company's revenues, expenses, and net income over a period of time. It is used to evaluate the company's profitability and to identify areas where costs can be reduced.

The cash flow statement tracks the company's cash inflows and outflows, providing a clear picture of its liquidity and ability to generate cash. It is particularly important for companies that rely heavily on cash sales or have significant capital expenditures.

In conclusion, maintaining accurate financial records and understanding the various financial statements are essential for the success of any business. By following the guidelines outlined in this document, you can ensure that your financial data is reliable and that you are able to make sound financial decisions.

DISCLAIMER

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the University of California, and shall not be used for advertising or product endorsement purposes.

This report has been reproduced
directly from the best available copy.

Available to DOE and DOE contractors from the
Office of Scientific and Technical Information
P.O. Box 62, Oak Ridge, TN 37831
Prices available from (615) 576-8401, FTS 626-8401

Available to the public from the
National Technical Information Service
U.S. Department of Commerce
5285 Port Royal Rd.,
Springfield, VA 22161



Lawrence Livermore National Laboratory

August 28, 1996

Dear Recipient:

Enclosed are copies of the Alternative Technical Summary Report for deep borehole alternatives within the Fissile Materials Disposition Program for inclusion in the public reading room documents in support of the FMDP Programmatic Environmental Impact Statement. Please place copies of each of these document in your reading room as soon as possible.

Document 1: UCRL-LR-121736

Document 2: UCRL-LR-121737

If there is any confusion or concern, please contact Ananda Wijesinghe at 510-423-0605 or FAX 410-423-6907.

Thank you.

Sincerely,

Ananda Wijesinghe



Recycle
1600-872

DISCLAIMER

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the University of California, and shall not be used for advertising or product endorsement purposes.

This report has been reproduced
directly from the best available copy.

Available to DOE and DOE contractors from the
Office of Scientific and Technical Information
P.O. Box 62, Oak Ridge, TN 37831
Prices available from (615) 576-8401, FTS 626-8401

Available to the public from the
National Technical Information Service
U.S. Department of Commerce
5285 Port Royal Rd.,
Springfield, VA 22161

ghe	G. Halsey		

	07/18/96	
4.0	08/23/96	S f Dec Di

August 2

CONTRIBUTORS

The following individuals contributed to the preparation of this Alternative Technical Summary Report for Deep Borehole Disposition:

1. Deep Borehole Disposition Alternative Team Leader:
William G. Halsey, *LLNL*
2. Lead Author and Scientific Editor:
Ananda M. Wijesinghe, *LLNL*
3. Contributing Authors:
Guy A. Armantrout, *LLNL*
Winslow G. Brough, *LLNL*
Mark C. Bronson, *LLNL*
Julio C. Diaz, *LLNL*
Matthew J. Fischer, *LLNL*
Darrla Giersch, *SNL*
Patrick Gildea, *SNL*
William G. Halsey, *LLNL*
Tehmau Kan, *LLNL*
Lonnie R. Moore, *LLNL*
Richard Morley, *LANL*
Booth R. Myers, *LLNL*
Chan Pang, *Bechtel*
Edward W. Russell, *LLNL*
Ronald J. Shaffer, *LLNL*
Henry F. Shaw, *LLNL*
Jay Spingarn, *SNL*
Ananda M. Wijesinghe, *LLNL*
4. Computer-Aided Graphics:
Joel A. Watkins, *LLNL*
5. Administrative Support:
Susan Uhlhorn, *LLNL*

Table of Contents

Table of Contents	i
List of Figures	iv
List of Tables	v
Executive Summary	ES-1
ES.1 Overview of Deep Borehole Disposition Alternatives	ES-1
ES.2 Deep Borehole Disposition Alternative Facility Descriptions.....	ES-2
ES.3 Assessment Against Evaluation Criteria.....	ES-4
ES.3.1 Criterion 1: Resistance to Theft or Diversion by Unauthorized Parties	ES-4
ES.3.2 Criterion 2: Resistance to Retrieval, Extraction, and Reuse by Host Nation.....	ES-6
ES.3.3 Criterion 3: Technical Viability	ES-7
ES.3.3.1 Technical Maturity	ES-7
ES.3.3.2 Technical Unknowns & Risks.....	ES-9
ES.3.3.3 Regulatory/Licensing Requirements.....	ES-11
ES.3.4 Criterion 4: Environmental, Safety & Health Compliance.....	ES-12
ES.3.4.1 Wastes & Emissions from Construction & Operations.....	ES-12
ES.3.4.2 Accident Scenarios & Accidental Releases	ES-13
ES.3.4.3 ES&H Consequences of Normal Operations & Accidents	ES-14
ES.3.5 Criterion 5: Cost Effectiveness.....	ES-14
ES.3.6 Criterion 6: Timeliness	ES-15
ES.3.6.1 Scheduling Issues	ES-15
ES.3.6.2 Schedule Uncertainty	ES-18
ES.3.7 Criterion 7: Fosters Progress and Cooperation with Russia and Other Countries	ES-18
ES.3.8 Criterion 8: Public and Institutional Acceptance.....	ES-19
ES.3.8.1 Ability to Create a Sustainable Consensus	ES-19
ES.3.8.2 Socioeconomic Impacts.....	ES-19
ES.4.0 Additional Benefits.....	ES-19
ES.4.1 Technology Spin-Offs & Contributions to National and International Initiatives	ES-19
ES.4.2 Potential for Hybrid Disposition Alternatives	ES-20
1.0 Description of the Immobilized Deep Borehole Disposition Alternative: <i>Immobilized Disposal of Plutonium Coated Ceramic Pellets in Grout Without Canisters</i>	1.0-1
1.1 Top-Level Process Description	1.1-1
1.2 Mass Balance Flow Sheets	1.2-1

1.3 Disassembly, Conversion & Immobilization Facility.....	1.3-1
1.3.1 Facility Description	1.3-1
1.3.2 Generic Site Description.....	1.3-15
1.3.3 Facility Operation.....	1.3-17
1.3.4 Waste Management	1.3-17
1.3.5 Intrasite Transportation.....	1.3-18
1.3.6 Safeguards and Security	1.3-19
1.3.6.1 Physical Security System Requirements and Facilities	1.3-19
1.3.6.2 Materials Control and Accountability.....	1.3-20
1.3.6.3 IAEA Safeguards Requirements	1.3-20
1.4 Deep Borehole Disposal Facility	1.4-1
1.4.1 Facility Description	1.4-8
1.4.2 Generic Site Description.....	1.4-14
1.4.3 Facility Operation.....	1.4-18
1.4.4 Waste Management	1.4-20
1.4.5 Intrasite Transportation.....	1.4-20
1.4.6 Safeguards and Security	1.4-22
1.4.6.1 Physical Security System Requirements and Facilities	1.4-24
1.4.6.2 Materials Control and Accountability.....	1.4-25
1.4.6.3 IAEA Safeguards Requirements	1.4-26
1.4.7 Site Characterization	1.4-27
1.4.8 Performance Assessment.....	1.4-30
1.5 Intersite Transportation.....	1.5-1
1.5.1 Transportation Between the Feed Originating Sites and the Disassembly, Conversion & Immobilization Facility	1.5-2
1.5.2 Transportation Between the Disassembly, Conversion & Immobilization Facility and the Deep Borehole Disposal Facility.....	1.5-4
2.0 Criteria Assessment	2.0-1
2.1 Resistance to Theft and Diversion	2.1-1
2.1.1 Deep Borehole Disposition Alternative S&S System Description.....	2.1-1
2.1.2 Applicable S&S Requirements and Measures.....	2.1-2
2.1.3 Identification of Diversion, Theft, or Proliferation Risks	2.1-5
2.2 Resistance to Retrieval and Reuse by the Host Nation	2.2-1
2.2.1 International Safeguards and Non-Proliferation	2.2-1
2.2.2 Applicable S&S Requirements and Measures.....	2.2-2
2.2.3 Possible Diversion, Retrieval and Reuse Risks	2.2-3
2.3 Technical Viability.....	2.3-1
2.3.1 Maturity of Technologies	2.3-1
2.3.2 Technical Unknowns and Risks	2.3-6

2.3.3 Assessment of Existing Regulatory Framework	2.3-7
2.4 Environmental, Safety and Health	2.4-1
2.4.1 Disassembly, Conversion & Immobilization Facility	2.4-1
2.4.1.1 Wastes and Emissions From Normal Operations and Construction	2.4-2
2.4.1.2 Accident Mitigation, Accident Scenarios and Accidental Releases	2.4-4
2.4.1.3 ES&H Consequences of Normal Operations	2.4-7
2.4.1.4 ES&H Consequences of Accidents	2.4-9
2.4.2 Deep Borehole Disposal Facility	2.4-9
2.4.2.1 Wastes and Emissions From Normal Operations and Construction	2.4-9
2.4.2.2 Accident Mitigation, Accident Scenarios and Accidental Releases	2.4-11
2.4.2.3 ES&H Consequences of Normal Operations	2.4-18
2.4.2.4 ES&H Consequences of Accidents	2.4-18
2.5 Cost of the Deep Borehole Disposition Alternative	2.5-1
2.5.1 Disassembly, Conversion & Immobilization Facility Costs	2.5-2
2.5.2 Deep Borehole Disposal Facility Costs	2.5-5
2.5.3 Deep Borehole Site Characterization Costs	2.5-8
2.5.4 Intersite Transportation Costs	2.5-12
2.5.5 Integrated R&D Program Costs	2.5-13
2.6 Schedule	2.6-1
2.6.1 Schedule Overview	2.6-1
2.6.2 Scheduling Issues	2.6-4
2.6.3 Scheduling Uncertainties	2.6-7
2.7 Other Issues	2.7-1
2.7.1 Benefits to Other Programs	2.7-1
2.7.2 Cooperation With Russia	2.7-1
2.7.3 Public and Institutional Acceptance	2.7-2
3.0 Opportunities for Hybrid Alternatives	3.0-1
4.0 References	4.0-1
5.0 Glossary	5.0-1

List of Figures

Figure ES.1-1	The End-to-End Process Flow Diagram for the Direct and Immobilized Deep Borehole Disposition Alternatives.....	ES-3
Figure ES.3.6-1	Summary Nominal Implementation Schedules for Immobilized and Direct Deep Borehole Disposition Alternatives.....	ES-16
Figure 1.0-1	The Deep Borehole Disposition Concept for Immobilized Disposal of Coated Ceramic Pellets in Grout.....	1.0-2
Figure 1.1-1	External Interfaces of the Immobilized Deep Borehole Disposition Alternative.....	1.1-2
Figure 1.1-2	Top-Level Flow Diagram for the Immobilized Deep Borehole Disposition Alternative	1.1-3
Figure 1.2-1	Plutonium Mass Balance Flow Diagram for the Immobilized Deep Borehole Disposition Alternative	1.2-2
Figure 1.3.1-1	Disassembly and Conversion Process Flow Diagram of the Disassembly, Conversion & Immobilization Facility	1.3-6
Figure 1.3.1-2	Immobilization Process Flow Diagram of the Disassembly, Conversion & Immobilization Facility	1.3-7
Figure 1.3.1-3	Perspective View of the Disassembly, Conversion & Immobilization Facility	1.3-8
Figure 1.3.2-1	Site Map of the Disassembly, Conversion & Immobilization Facility	1.3-16
Figure 1.4-1	Criticality Analysis for Ceramic Pellet-Grout-Brine Mixture Emplaced in the Borehole	1.4-5
Figure 1.4-2	Criticality Analysis for Ceramic Pellet-Brine Mixture Emplaced in the Borehole	1.4-6
Figure 1.4.1-1	First-Level Deep Borehole Disposal Facility Process Flow Diagram	1.4-9
Figure 1.4.1-2	Perspective View of the Deep Borehole Disposal Facility.....	1.4-12
Figure 1.4.1-3	Deep Borehole Disposal Facility Site Plan Detail and Plutonium Transportation Routes	1.4-13
Figure 1.4.2-1	Geographic Generic Site Area Map of Deep Borehole Disposal Facility	1.4-15
Figure 1.4.2-2	Geologic Cross Section on A-A' (in Figure 1.4.1-1) showing Hydrogeologic Features at the Generic Deep Borehole Disposal Facility Site	1.4-16
Figure 1.4.2-3	Deep Borehole Disposal Facility Site Map (Including Security Boundaries).....	1.4-17
Figure 1.4.3-1	Deep Borehole Disposal Facility Plutonium Process Block Flow Diagram	1.4-21
Figure 2.6.1-1	Nominal Implementation Schedule for Immobilized Deep Borehole Disposition Alternative	2.6-2

Table 2.5.2-1	Pu Processing Assumptions for the Deep Borehole Disposal Facility.....	2.5-5
Table 2.5.2-2	Life Cycle Cost Summary for the Deep Borehole Disposal Facility...	2.5-7
Table 2.5.3-1	Site Screening and Site Selection Costs for the Deep Borehole Disposition Alternative (\$M).....	2.5-10
Table 2.5.3-2	Site Characterization Costs for the Deep Borehole Disposition Alternative (\$M).....	2.5-11
Table 2.5.3-3	Total Siting Costs for the Deep Borehole Disposition Alternative (\$M).....	2.5-12
Table 2.5.4-1	Intersite Transportation Costs for the Immobilized Deep Borehole Disposition Alternative (\$M).....	2.5-12
Table 2.5.5-1	Research & Development Program Costs for the Immobilized Deep Borehole Disposition Alternative (\$M).....	2.5-13
Table 2.6.1-1	Timeliness Measures for Immobilized Deep Borehole Disposition Alternative.....	2.6-1

EXECUTIVE SUMMARY

This Executive Summary summarizes and compares the Immobilized and Direct Deep Borehole Disposition Alternatives presented in the alternative technical summary reports UCRL-LR-121736 and UCRL-LR-121737 by *Wijesinghe et al. (July 25, 1996a,b)*. The important design concepts, facility features and operational procedures are first briefly described. This is followed by a discussion of the issues that affect the evaluation of each alternative against the programmatic assessment criteria that have been established for selecting the preferred alternatives for plutonium disposition.

ES.1 OVERVIEW OF DEEP BOREHOLE DISPOSITION ALTERNATIVES

In the deep borehole concept for geologic disposal of surplus weapons-usable fissile materials, the material will be emplaced in the lower part of one or more deep boreholes drilled in tectonically, hydrologically, thermally and geochemically stable rock formations (see Figure ES.1-1). In the current borehole disposition concept, the depths at which the fissile materials are emplaced (i.e., the 'emplacement zone') lie 2-4 km below the surface. Once the disposal form is emplaced and sealed in the emplacement zone, the 'isolation zone,' which extends from the top of the emplacement zone to the ground surface, is filled and sealed with appropriate materials. At emplacement depths, which are several thousands of meters greater than those of mined geologic repositories, the groundwater is expected to be relatively stagnant and to exist at temperatures of 75-150°C, pressures of 50-100 MPa (7,500-15,000 psi) and to have salinities of up to 40% by weight. Because of the large barrier to transport posed by the isolation zone, the siting of the facility at a carefully selected stable location with stagnant groundwater at depth, and the stability and low-solubility of the disposal form the disposed **material is expected to remain, for all practical purposes, permanently isolated from the biosphere.**

The disposal of plutonium in deep boreholes requires the original feed materials to be first converted to a form that is suitable for emplacement in the borehole. The desired characteristics of the output disposal form include solidity, high resistance to dissolution by subsurface brines, and thermal and compositional stability over very long periods of time under the conditions that prevail at emplacement depths. In the Direct Deep Borehole Disposition Alternative, some of the original feed material forms have to be first converted to plutonium dioxide while the remaining feed types are repacked in containers without conversion. The conversion and packaging process is performed in a Disassembly & Conversion Facility which receives the feed material as plutonium pits, clean plutonium metal, clean oxide, various salts, metal scrap, sand, slag and crucibles, etc. The Facility produces, without further concentration or purification, plutonium dioxide admixtures and/or plutonium metal as the output product. This product is first packed in metal cans with double containment, then sealed in transportation containers and is delivered by SSTs to the Deep Borehole Disposal Facility. At the Deep Borehole Disposal Facility, the transportation containers are directly encapsulated in large emplacement canisters without reopening. The emplacement canisters are then lowered

into the borehole and are sealed in place. Finally, the isolation zone is sealed from the top of the emplacement zone to the surface. A total of 4 deep boreholes are required.

In the Immobilized Deep Borehole Disposition Alternative, all feed forms are first converted to plutonium dioxide in a disassembly & conversion process that is similar to that used in the Direct Deep Borehole Disposition Alternative. Subsequently, the plutonium dioxide is immobilized in a ceramic matrix and is formed into ceramic-coated plutonium-loaded ceramic pellets with 1% plutonium by weight. These operations are performed in a combined Disassembly, Conversion & Immobilization Facility. The ceramic pellets are then transported by SSTs to the Deep Borehole Disposal Facility. Here the plutonium-loaded ceramic pellets are uniformly mixed with an equal volume of plutonium-free ceramic pellets (to yield a pellet mixture with an average plutonium loading of 0.5%) and a specially formulated 'grout.' The dilution of the plutonium-loaded pellets with plutonium-free pellets increases the criticality safety margin while halving the total cost of manufacturing the plutonium-loaded ceramic pellets. The mix is then directly emplaced in the uncased emplacement zone of the borehole where it sets and hardens into a concrete-like solid. No metal canisters, packaging materials or borehole casings are left in the emplacement zone of the borehole. Finally, as in the case of Direct Disposition, the isolation zone of the borehole is sealed from the top of the emplacement zone to the surface. As in Direct Disposition, a total of 4 deep boreholes are required.

The Preferred Deep Borehole Disposal Alternative

The Immobilized Deep Borehole Disposition Alternative described above is expected to perform significantly better than the Direct Deep Borehole Disposition Alternative with respect to criticality safety, post-closure isolation from the biosphere and proliferation resistance of the emplaced fissile materials. Furthermore, except for increased cost, there are no negative impacts on pre-closure ES&H, timeliness, technical maturity and other assessment criteria that significantly detract from the greater confidence it provides with regard to post-closure performance, ES&H and S&S. The immobilized deep borehole disposition alternative costs 990 \$M (38.3%) more than the direct deep borehole disposition alternative. Because the benefits of superior performance of immobilized deep borehole disposition alternative are expected to more than offset its increased cost, the Deep Borehole Disposition Alternative Team recommends this design based on the *Immobilized Disposal of Plutonium in Coated Ceramic Pellets in Grout Without Canisters* as the preferred alternative for the deep borehole disposition of weapons-usable plutonium.

ES.2 DEEP BOREHOLE DISPOSITION ALTERNATIVE FACILITY DESCRIPTIONS

As shown in Figure ES.1-1, the Direct and Immobilized Deep Borehole Disposition Alternatives have key external process interfaces to Feed Source Sites, and internal process interfaces between the 'Front-End' Disassembly & Conversion/

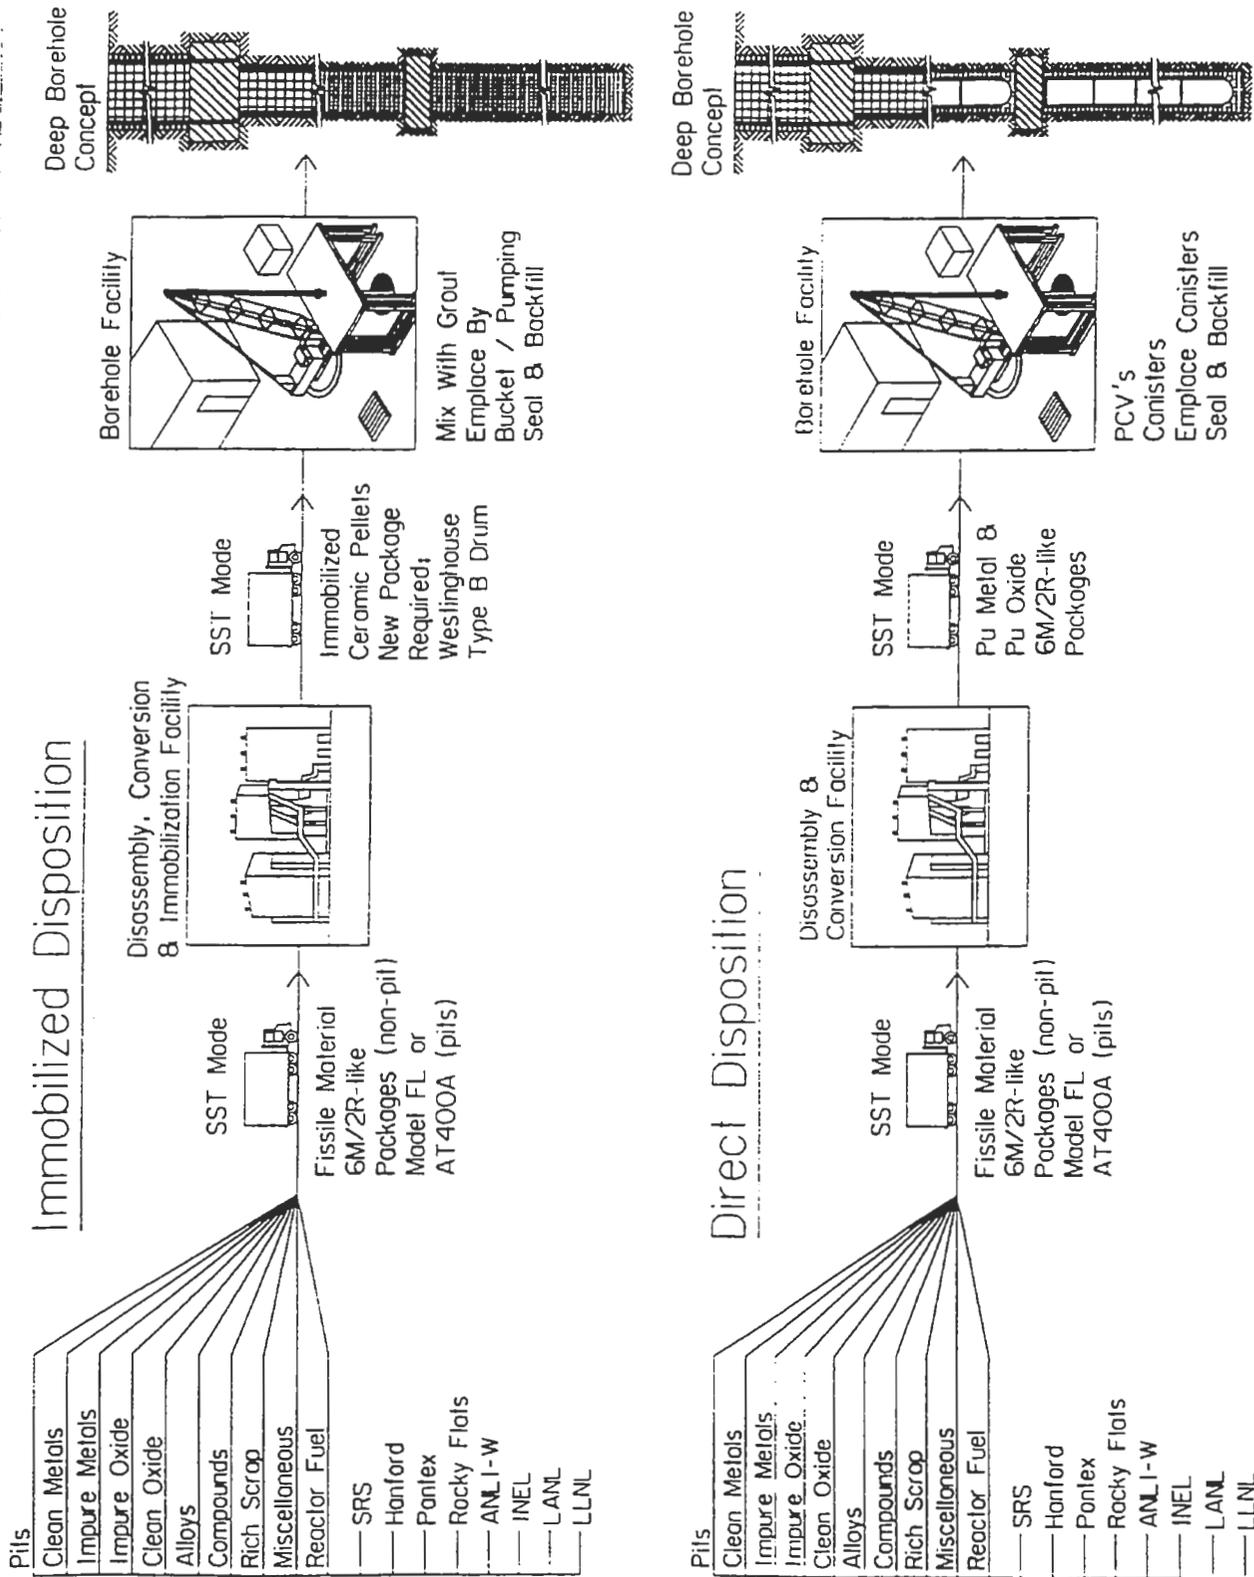


Figure ES.1-1: The End-to-End Process Flow Diagram For the Direct and Immobilized Deep Borehole Disposition Alternatives

Disassembly, Conversion & Immobilization Facility, the 'Back-End' Deep Borehole Disposal Facility, the Transportation Task, and the Safeguards and Security Task.

Surplus plutonium from various source facilities is transported to the Front-End Facility for conversion to plutonium metal or oxide in Direct Disposition, or for conversion to plutonium oxide followed by immobilization of the oxide in ceramic-coated ceramic pellets in Immobilized Disposition. Depending on their chemical compositions and physical attributes, the different feed forms to the Front-End Facility are processed differently before being transported to the Deep Borehole Disposal Facility.

The Deep Borehole Disposal Facility consists of sub-facilities for receiving and storing the disposal form, processing the disposal form, and emplacing the disposal form in the boreholes. In the Direct Disposition Alternative, the plutonium metal and plutonium oxide feed are delivered in sealed 6M/2R-like canisters. These are further encapsulated in emplacement canisters at the Deep Borehole Disposal Facility. The emplacement canisters are lowered into the boreholes and are grouted in place. In the Immobilized Disposition Alternative, the plutonium loaded ceramic pellets are delivered in a Type B double containment drum package (the proposed package is the new Westinghouse Type B 208-liter (55-gal) drum package that is currently under development). The ceramic pellets, which are stored on-site until needed, are then transported to the emplacing facility where the plutonium loaded pellets are mixed with grout and an equal volume of plutonium-free filler ceramic pellets. The resulting slurry is emplaced within the boreholes either by bucket or by pneumatically pumping the wet slurry into the borehole through a delivery pipe. Finally, when plutonium is emplaced along the entire 2 km length of the emplacement zone in the lower half of the borehole, the remainder of the borehole is filled and sealed with appropriate materials.

ES.3 ASSESSMENT AGAINST EVALUATION CRITERIA

ES.3.1 Criterion 1: Resistance to Theft or Diversion By Unauthorized Parties

Safeguards and security systems are established to preclude theft and diversion of the attractive fissile materials in the Deep Borehole Disposition Alternatives. The Front-End Facility (i.e., the Disassembly & Conversion Facility or the Disassembly, Conversion & Immobilization Facility) and the Deep Borehole Disposal Facility will be secure nuclear facilities while the transportation of plutonium exposes the materials to increased threats of theft and diversion. After emplacement and sealing of the borehole, the intrinsic (self) protection of the geologic barrier is very significant.

The proliferation risks of the Direct and Immobilized Deep Borehole Disposition Alternatives can be analyzed in terms of the *Environment, Material Form* and *S&S Assurance* measures. This assessment is assessed through qualitative measures in Table ES.3.1-1 and is summarized below:

- Direct Disposal Alternative:** The plutonium is received at the Disassembly & Conversion Facility as a highly attractive material and it remains so until it is encapsulated in large canisters at the Deep Borehole Disposal Facility. When encapsulated, although the material form of the plutonium is still attractive, the proliferation risk is reduced as a result of the large size and weight of the emplacement canisters. The Disassembly & Conversion Facility and the Deep Borehole Disposal Facility will be secure nuclear facilities. Transportation of plutonium exposes the materials to threats of theft and diversion. *The 'stored weapon standard' will be maintained to the extent practical, consistent with DOE requirements.* After emplacement and sealing of the borehole, the intrinsic (self)

**Table ES.3.1-1: Potential Risks for Threats and Criteria 1 & 2
for Deep Borehole Disposition Alternatives**

	Inter-Site Transport	Disassembly Conversion	Immob. Process	Inter-Site Transport	Borehole Facility	Borehole Disposed
DIRECT DISPOSITION						
Threat						
Covert Threat	Medium	High		Medium	Medium	Low
Overt Threat	Medium	Medium		Medium	Medium	Low
Diversion	Medium	High		Medium	Medium	Low
Criterion 1						
Material Form	High	High		High	Medium	Low
Environment	Medium	Medium		Medium	Medium	Low
Safeguards and Security	Medium	High		Medium	Medium	Low
Criterion 2						
Detectability	High	High		High	Medium	Low
Irreversibility	High	High		High	Medium	Low
IMMOBILIZED DISPOSITION						
Threat						
Covert Threat	Medium	High	High/Med.	Medium	Low	Very Low
Overt Threat	Medium	Medium	Medium	Medium	Low	Very Low
Diversion	Medium	High	High/Med.	Medium	Low	Very Low
Criterion 1						
Material Form	High	High	High/Med.	Medium	Low	Very Low
Environment	Medium	Medium	Medium	Medium	Low	Very Low
Safeguards and Security	Medium	High	High/Med.	Medium	Low	Very Low
Criterion 2						
Detectability	High	High	High/Med.	Medium	Medium	Very Low
Irreversibility	High	High	High/Med.	Medium	Medium	Very Low

protection of the geologic barrier is very significant so that the 'spent fuel standard' is achieved and maintained following the emplacement of the canisters in the borehole. Post-closure monitoring, for example by satellites in earth orbit, will contribute to the proliferation resistance of the Direct Deep Borehole Disposition Alternative.

- **Immobilized Disposal Alternative:** The plutonium is received at the Disassembly, Conversion & Immobilization Facility as a highly attractive material. Once the material is processed, blended and converted to ceramic, the material form is much less attractive. Also, because the concentration of plutonium in the ceramic pellets is very low, a large quantity of pellets is required to produce a 'significant quantity.' Although the pellets are processed in bulk, they are subsequently handled in drummed packages subject to itemized accounting. Prior to emplacement in the borehole, the material does not meet the spent fuel standard and requires appropriate safeguards. Therefore, the 'stored weapon standard' will be maintained to the extent practical consistent with DOE requirements. After emplacement and sealing in the borehole, the final disposition environment, form and S&S assurance for the Immobilized Deep Borehole Disposition Alternative meets or exceeds the spent fuel standard. Post-closure monitoring, for example by satellites in earth orbit, will contribute to the proliferation resistance of the Immobilized Deep Borehole Disposition Alternative.

ES.3.2 Criterion 2: Resistance to Retrieval, Extraction, and Reuse by Host Nation

The primary barriers to retrieval and reuse include the IAEA's independent verification procedures, the difficulty of completing the task undetected by IAEA representatives, and the significant task time. Given the substantial post-emplacement proliferation resistance inherent in the Deep Borehole Disposition Alternative (i.e., the difficulty of retrieving the material following emplacement), the materials involved are only considered credible targets prior to emplacement.

The IAEA has established a set of 'Safeguards Criteria' for the MC&A, and the C/S of fissile material. The requirements in this area are derived from IAEA Statutes and Informational Circulars. The IAEA safeguards criteria and security recommendations are typically based on practices followed in the U.S.A. and agreed upon by the IAEA member states. The International Diversion, Retrieval, Extraction, and Reuse criterion (Criterion 2) evaluates the system resistance to diversion of material before final disposition by the weapon state itself, retrieval of material after final disposition by the weapon state itself, and conversion of the material back into weapon usable form covertly by the host nation/state. The IAEA does perform independent verification of the data from the state's system of material control and accounting. The IAEA, in performing its safeguards inspection activities, audits the facility records and makes independent measurements of selected samples of each kind of nuclear material in the facility. There is an inherent limitation on the accuracy of NDA measurements that presents an increased risk of diversion at high throughput facilities. This is where C/S plays an important role

in assuring material accountability. The primary safeguards against these risks are the irreversibility of the material forms (e.g., the difficulty of converting the material into a weapons-usable form) and the ability to detect diversion, retrieval and conversion. This assessment is assessed through qualitative measures in Table ES.3.1-1 and is summarized below:

- **Direct Disposal Alternative:** *The final disposition form, environment, and S&S for this alternative meets the spent fuel standard.* Prior to borehole disposition the material does not meet the spent fuel standard and therefore protection commensurate with its attractiveness level must be provided. The protection offered by the Direct Deep Borehole Disposal Alternative is less than that of the Immobilized Deep Borehole Disposition Alternative in the steps following Disassembly & Conversion up to and including final disposition.
- **Immobilized Disposal Alternative:** *The final disposition form, environment, and S&S for this alternative meets the spent fuel standard.* Prior to borehole disposition the material does not meet the spent fuel standard and therefore protection commensurate with its attractiveness level must be provided. The protection offered by the Immobilized Deep Borehole Disposal Alternative is greater than that of the Direct Disposition Alternative in the steps following Immobilization up to and including final disposition.

ES.3.3 Criterion 3: Technical Viability

ES.3.3.1 Technical Maturity

While no deep borehole disposal facilities for plutonium disposition have ever been developed, many of the technologies needed for this alternative are quite mature, and the basic concept has been considered previously. The overall concept of deep borehole disposition has been considered in recent decades for disposal of both hazardous and radioactive wastes. This concept received significant investigation in the 1970s for disposal of high-level radioactive waste (HLW) and spent nuclear reactor fuel (SNF). Similar studies have been conducted in other countries including Russia, Sweden and Belgium.

The front end technologies for processing and converting the various potential Pu feed forms are similar to, or less demanding than, those for all other disposition alternatives. Transportation, MC&A and Safeguards technologies have been demonstrated, although continued improvements may be desirable. Fissile material containing ceramic pellet production is a mature technology for nuclear fuel production and has been used for Pu containing MOX fuel. The pellet coating process is also a mature technology that is, for example, also being considered for the High Temperature Gas Reactor fuel. The borehole drilling, emplacement and sealing technology is available as an extrapolation from large hole techniques for nuclear weapons testing and deep drilling for resource exploration and geotechnical research.

The technical maturity of the Immobilized and Direct Deep Borehole Disposition Alternatives were evaluated by first decomposing the unit processing operations of each alternative according to the second-level processing flow diagrams and assigning an unweighted technical maturity level to each unit operation according to a 12-level maturity scale. The 12-level maturity scale was graded from the conceptual stage (level 1), laboratory feasibility testing (levels 2-4), prototype testing (5-10) to commercialization (levels 11-12). Relative importance weights, graded on 3-level scale (0.1, 1, 10), were then applied to weight the technical maturity of each unit operation according to its importance to the viability of the alternative as a whole. The dependence of the technical viability of the two disposition alternatives on post-closure ES&H performance (i.e., isolation of the disposed plutonium from the biosphere and criticality safety) was taken into account separately from the process of disposing of the plutonium. The pre-closure disposition operations and the post-closure performance were assigned relative importance weights of 0.75 and 0.25, respectively. Two weighted technical maturity measures (0-1 scale and 0-12 scale) were computed from the weighted average of the technical maturities of the individual operating units for each surface facility and the post-closure ES&H performance for each deep borehole disposition alternative. These results are summarized in Table ES.3.3.1-1. The details of the procedure used to compute these values are given in the main text of the two reports. From Table ES.3.3.1-1 it can be seen that the overall technical viabilities of the Immobilized and Direct Disposition

**Table ES.3.3.1-1: Weighted Technical Maturity of
Deep Borehole Disposition Alternatives**

Facilities & Alternatives	Technical Maturity (0-1 Scale)	Technical Maturity (0-12 Scale)
IMMOBILIZED DISPOSITION		
Disassembly & Conversion Sub-Facility	0.78	9.4
Immobilization Sub-Facility	0.68	8.2
Disassembly, Conv. & Immobilization Facility	0.71	8.5
Deep Borehole Disposal Facility	0.69	8.3
Post-Closure ES&H Performance	0.67	8.0
<i>Immobilized Disposition -25% post-closure weight</i>	<i>0.69</i>	<i>8.3</i>
<i>Immobilized Disposition -75% post-closure weight</i>	<i>0.68</i>	<i>8.1</i>
DIRECT DISPOSITION		
Disassembly & Conversion Facility	0.82	9.8
Deep Borehole Disposal Facility	0.76	9.1
Post-Closure ES&H Performance	0.50	6.0
<i>Direct Disposition - 25% post-closure weight</i>	<i>0.70</i>	<i>8.4</i>
<i>Direct Disposition - 75% post-closure weight</i>	<i>0.57</i>	<i>6.8</i>

Alternatives are very nearly the same. It can also be seen that while the pre-closure operations of the simpler Direct Disposition Alternative are more technically mature, the Immobilized Disposition Alternative is more technically viable than Direct Disposition.

ice in
borehole

ice in
on the

by
ice to

to

adequately not only the isolation zone in the upper half the borehole but also the emplacement zone in the bottom half of the borehole. In design concepts that employ emplacement canisters, borehole sealing may be compromised as a result of corrosion induced disintegration (in about 100 years) or earthquake induced disruption of the canisters that could increase the hydraulic conductivity of the seals. As a result, fluid flow and convective transport of the fissile material towards the biosphere along the borehole may be increased. This possibility may not be mitigated by the presumed lack of forces driving fluid flows at emplacement depths, and the large barrier offered by the isolation zone, because it is known that conductive fractures persist to great depths and that the lack of fluid flow at great depth now does not preclude it from occurring in the future. For example, pressurization of brine in deep geological formations by earthquakes can cause fluid migration towards low pressure zones that persist over hundreds of thousands of years - time enough to dissolve and mobilize Pu from the disposal forms. Furthermore, no region is free of deep penetrating fractures, it is only a matter of to what degree it is fractured and to what extent it is tectonically stable. Fractures that intersect the emplacement zone may short circuit the isolation zone. Consequently, the emplacement zone must also be sealed adequately to minimize this possibility.

3. Increased Post-Closure Criticality Safety: The plutonium loading in the ceramic pellet option has been kept to a very low 0.5% effective loading (for a 1:1 mix of 1% plutonium-loaded pellets and plutonium-free pellets). This drives the criticality coefficient down to a value of 0.67 under the worst possible brine saturated conditions *without the addition of any neutron absorbers*. This is far below the value of 0.95 specified for the safe storage of plutonium metal in surface facilities. In this design, our calculations show that there is no combination of size, shape or water/brine saturation of a region occupied by the disposal form that would drive the system to criticality. Increase in halide salt concentration in the brine, or reduction in the degree of water saturation, only increases the margin of safety. The only possible, but highly unlikely, post-closure scenario for criticality is that in which, over a very long period, the Pu is dissolved out from the ceramic, and is transported to a location where it either precipitates out or is sorbed on rock as a mineral assemblage in sufficient quantities to form a critical mass. Because the Pu-concentration in the precipitate would be very small, and the pore spaces available to accommodate precipitated material in fractured and unfractured rock at depth are very small, this is very unlikely. This, however, does not preclude it from happening in a sufficiently large cavity over a very long period of time. Criticality of the very long lived ^{235}U (a decay product of the much shorter lived ^{239}Pu) can be prevented by incorporating depleted $^{238}\text{UO}_2$ in the ceramic pellets. The ^{235}U would then transport and chemically combine in the same way as the ^{238}U but because of isotopic dilution would not become critical. Furthermore, because the chemical behavior of plutonium and uranium are very similar, ^{239}Pu and ^{238}U are also likely to transport without separation, thus providing a measure of criticality safety for the dissolved Pu before the Pu has decayed to ^{235}U . On the other hand, no assurance can be given that the physical separation of the Pu/PuO₂ in the emplacement canisters in the direct disposition alternative would not be reduced by a physically disruptive event, by selective erosion

and removal of the sealant, or by selective plastic flow and extrusion of the sealant after disintegration of the canister. In that event, even the close juxtapositioning of as few as three product cans could result in a criticality event. Many arguments can be given to show that this is unlikely to occur, but not with sufficient power to convince and prevent a controversy that could compromise licensing of the direct deep borehole disposition alternative.

4. Reduced Post-Closure Safeguards & Security Risks: The retrievability of the emplaced plutonium from the borehole is a much more costly and time consuming task for the immobilized alternative because of the low plutonium concentration in the ceramic pellets (0.5% average) and the resulting large mass that must be retrieved. On the other hand, although both deep borehole disposition alternatives require redrilling through the 2 km deep isolation zone, it is much easier to selectively locate and extract the small product cans/primary containment vessels in the direct disposition alternative if the emplacement canisters and inner primary containment vessels have not yet disintegrated. Even after disintegration of the canisters it is much easier to remotely detect and extract the highly concentrated plutonium from the former locations of the disintegrated small product cans. After retrieval from the borehole, the immobilized material will require much more processing to recover weapons-grade plutonium than the simple density based processes (e.g., sedimentation) required to separate high grade Pu from the waste materials recovered from the borehole in the direct deep borehole disposition alternative.

ES.3.3.3 Regulatory/Licensing Requirements

Regulatory uncertainty is the largest single uncertainty that affects the viability of deep borehole disposition. A regulatory plan for interacting with potential regulators is being followed to develop mutually acceptable agreements and regulatory solutions early to reduce this uncertainty. Preliminary discussions with licensing experts indicate that solutions can indeed be developed given sufficient time, or a social and congressional mandate. Certain of these issues are qualitatively similar for both Direct and Immobilized Deep Borehole Disposition Alternatives.

Concentrated, separated, fissile material in significant quantities has never been considered for direct disposition before and many current waste management regulations are not clearly appropriate for such a facility. This uncertainty, however, is greater for the Direct Deep Borehole Disposition Alternative than the Immobilized Deep Borehole Disposition Alternative in which the fissile material concentration is very low. This implies a need for a new category or sub-category of waste for excess weapons-usable fissile material and federal legislation to specify regulatory jurisdiction over any disposition activities. Because concentrated plutonium has never been considered waste and does not conform to the definition or the acceptance criteria for any waste form that is currently regulated, it is expected that specific legislative and regulatory action will be needed to guide fissile material disposition. Licensing requirements are a key area in which ~~there are no clearly applicable~~ regulations for the deep borehole disposition.

Concentrated plutonium disposition forms meet neither the requirements for HLW nor the normal criteria for TRU. However, the HLW repository and WIPP provide useful precedents that governing legislation and regulations for licensing a plutonium disposition facility can and should be specifically developed.

Siting guidelines are another area of uncertainty. Site suitability guidelines such as those of 10 CFR 960 for the HLW repository program were developed specifically for a mined geologic repository that permits human access for characterization, and for a facility for isolation of material that poses a much greater potential dose hazard than the excess fissile material and which must satisfy specific system and subsystem performance requirements. Many of the provisions of Part 960 are clearly not appropriate for the deep borehole disposal facility. A current activity in the FMDP deep borehole disposition task is to consider potential site characteristics and the beneficial and adverse impacts that could result from these characteristics. The results from these preliminary studies should provide a basis for defining site guidelines in the future.

ES.3.4 Criterion 4: Environmental, Safety & Health Compliance

ES&H compliance of deep borehole disposition alternatives need to be assessed by considering the impacts and consequences of constructing and operating all of the facilities in the end-to-end alternative during the pre-closure and post-closure phases. These impacts include the wastes and emissions generated during construction and normal operation, the contaminant releases and other risks associated with design-basis and beyond-design-basis accidents, the possibility of long-term contaminant release from the emplaced disposal form to the biosphere, and the criticality safety of the plutonium emplaced in the borehole. All operations of both deep borehole alternatives will be carried out safely in compliance with existing ES&H standards. Generally, the wastes and emissions generated by the immobilized deep borehole disposition alternative during the processing operations at the surface are somewhat greater than those of the direct deep borehole disposition alternative because of the additional immobilization step in the former alternative. The long-term performance and safety of the immobilized deep borehole alternative, however, significantly exceeds that of the direct deep borehole disposition alternative with respect to both the potential for contamination of the biosphere and the occurrence of any post-closure long-term criticality events. The ES&H impacts of the two alternatives are summarized below.

ES.3.4.1 Wastes & Emissions from Construction & Operations

The Hazardous, Nonhazardous and Criteria Pollutant wastes and emissions from the construction of the Front-End and Deep Borehole Disposal Facilities are comparable for the Immobilized and Direct Disposition alternatives. The wastes and emissions of concern that are generated during operation of these Facilities are Radioactive & Hazardous Wastes, Non-Hazardous Wastes, Criteria Pollutant Emissions, Radiological Emissions and Other Industrial Chemical Effluents. For the Front-End Facility, the Other Industrial Chemical Effluent (e.g., carbon dioxide, chlorine, hydrochloric acid, nitric

acid) quantities are comparable for the two alternatives with the exception that a significant quantity of dissolved solids is produced by the ceramic pellet manufacturing process. The Radioactive & Hazardous wastes produced by the Facility in these two alternatives are also comparable except that about ten times as much TRU waste is produced by the immobilized alternative (168 m³) when compared to the direct alternative (15 m³). Significantly more Criteria Pollutant Emissions (e.g., sulfur dioxide, nitrogen oxides, carbon monoxide, volatile organic compounds and other hydrocarbons) are produced by the immobilized disposition alternative than the direct disposition alternative. In contrast, the direct disposition alternative produces about 50 times more transuranic Radiological Emissions (500 nCi/yr) than the immobilized disposition alternative. For the Deep Borehole Facility, the wastes and emissions generated during operation are comparable for both immobilized and direct disposition alternatives in all of the categories, except in the Hazardous Waste category where about 70 times more liquid hazardous waste is generated in the immobilized disposition alternative as a result of the ceramic pellet-grout mixing and emplacement operations.

Generally, the wastes and emissions generated by the immobilized borehole disposition alternative during the processing operations at the surface are somewhat greater than those of the direct deep borehole disposition alternative because of the additional immobilization step in the former alternative. The significances of these differences in wastes and emissions from an ES&H perspective must be evaluated in the light of their probable consequences and risks. This assessment is presented in the Programmatic Environmental Impact Statement.

ES.3.4.2 Accident Scenarios & Accidental Releases

Design-basis and beyond-basis-accident scenarios have been defined and analyzed for the Front-End and Deep Borehole Disposal Facilities of both immobilization and direct disposition alternatives. The analyses provide best estimates of the accident probability, the source terms at risk, the respirable airborne fraction and the fraction of the source released as a result of each type of accident. These results are given in the corresponding Alternative Technical Summary Reports. They indicate that given the accident mitigating safety features incorporated in the facility designs, the releases comply with safety standards. ~~More~~ accident scenarios have been included for the Front-End Facility of the ~~immobilized~~ borehole disposition alternative than for the direct borehole disposition alternative because of the greater number of processing steps and their complexity, but the accident probabilities and potential releases are not significantly greater than for ~~the direct borehole disposition~~ alternative.

The ~~Deep Borehole Disposal Facility~~ operations and accident scenarios are quite different for ~~the immobilized and direct~~ borehole disposition alternatives due to the differences in the disposal form and the method of emplacing it in the borehole. In general, the criticality risk associated with handling and emplacing the uncanistered ceramic-pellet disposal form in the immobilized borehole disposition alternative is extremely low due to the very low Pu-loading of the ceramic pellets. In contrast, the

or the direct disposition
 position alternative (i.e.,
 possible disposition alte

Table EC 2-1: Cost Summary for Borehole Disposition

STUDY CRITERIA	D,C & I Facility \$M	JZ UC	Borehole Disposition		Direct Alternative \$M
			Utilized Alternative	Direct Facility	
Cost	583	7	51	8	
Cost	1,509	7	28	2	1,109
Total Cost	2,092	14	79	10	1,475
			74	10	2,584

of the cost of the direct borehole disposition alternative. However, in view of the greater confidence in long term performance and safety, the immobilized disposition alternative remains the preferred deep borehole disposition alternative.

ES.3.6 Criterion 6: Timeliness

The preliminary nominal schedule to site, license, deploy, operate, and decommission/close an integrated system for the Direct and Immobilized Deep Borehole Disposal of surplus weapons plutonium is presented in Figure ES.3.6-1.

The critical start and end dates for each alternative are summarized in Table ES.3.6-1. The schedule assumes a project start date of January 1, 1996, which is consistent with the current December 1, 1996 scheduled date for the PEIS record of decision (ROD).


Table ES.3.6-1: Timeliness Measures for Immobilized & Direct Deep Borehole Disposition Alternatives

Timeliness Measure	Years From Project Start (1/1/1997)	Date
Start Emplacement	10	1/1/07
End Emplacement	20	12/31/16
Seal Last Borehole	20.5	6/30/17
Close All Sites	22	12/31/18


ES.3.6.1 Scheduling Issues

- **Legislation and Rulemaking:** The legislative and regulatory framework for the disposition of surplus weapons Pu is not well established at the present time. Thus, present laws and regulations will need, at the least, to be modified or amended to cover the disposal alternative.
- **Site Selection & Characterization:** Non-site-specific research and development and site screening activities are carried out parallel with the legislative and rulemaking period. Site characterization and determination of site suitability follow site selection and are critical path activities that culminate in the submission of a license application to the NRC.
- **Deep Borehole Disposal Facility Licensing:** A key program assumption is that any new facility would be licensed by the NRC. A reasonable approach to deep borehole facility licensing has been developed.

Nominal Implementation Schedule for the Immobilized Deep Borehole Disposition Alternative

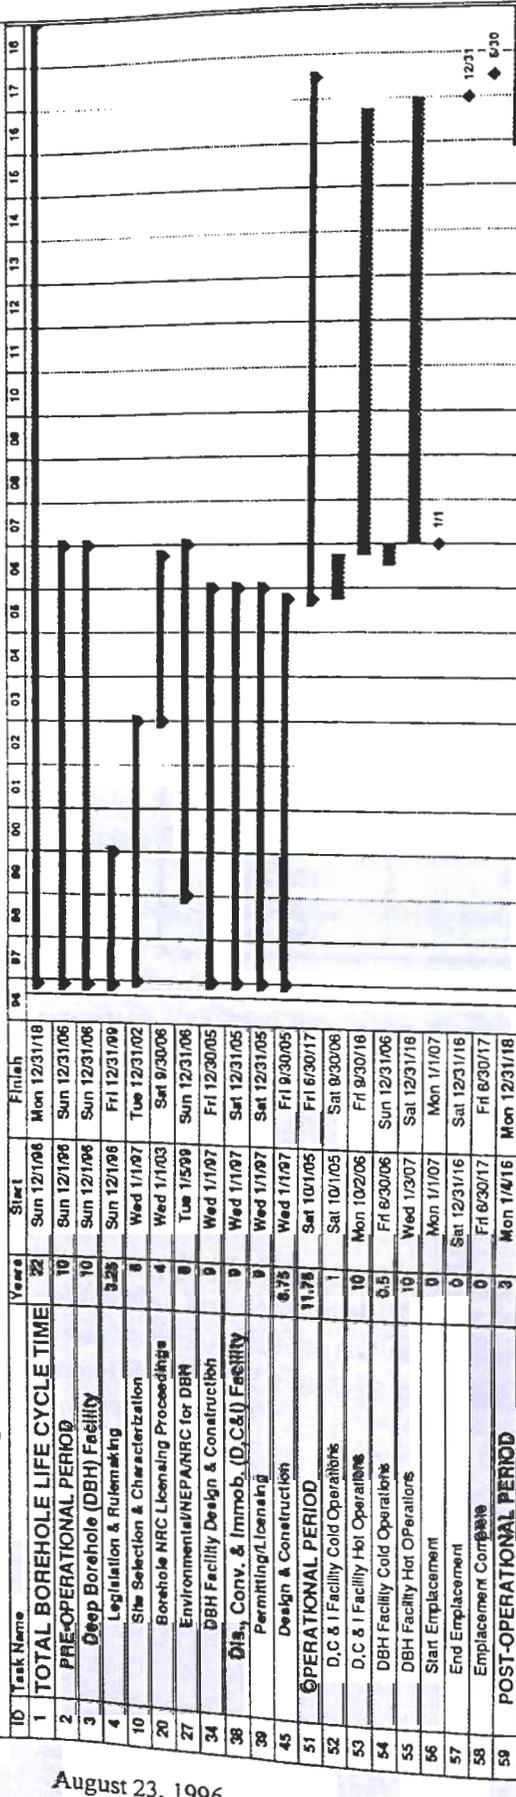

Nominal Implementation Schedule for the Direct Deep Borehole Disposition Alternative

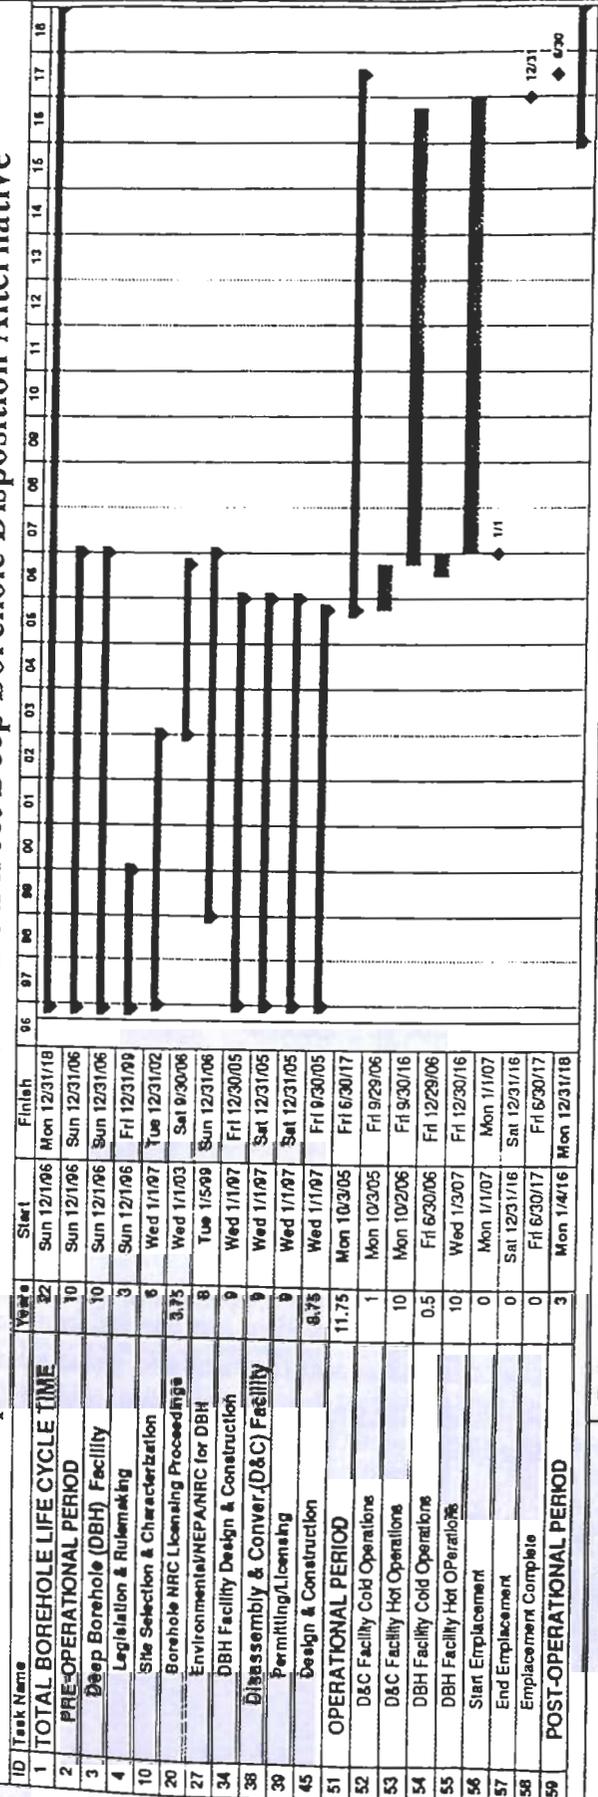

Project: Plutonium Disposition
Date: Fri 8/23/96

Task Progress

Milestone Summary

Legend: Rolled Up Task, Rolled Up Milestone

August 23, 1996

- ***Environmental/NEPA for Deep Borehole Disposal Facility:*** It is assumed that a site-specific EIS will need to be prepared for the Deep Borehole Disposal Facility in parallel with site characterization and submitted to the NRC somewhat before the DOE files for the borehole license application. Following the issuance of the SER for the Deep Borehole Disposal Facility by the NRC, the NRC prepares and issues a draft EIS, which is made available for public comment.
- ***Deep Borehole Disposal Facility Design & Surface Facility Construction:*** Conceptual design of the Deep Borehole Disposal Facilities begins immediately after the ROD, and extends through site selection (4.5 years total). Once a site has been selected, Title I design begins, followed by Title II design and are completed in time for the DOE to incorporate them into the Deep Borehole Disposal Facility. Construction of the surface facilities begins after completion of Title II design.
- ***Front-End Disassembly & Conversion/Disassembly, Conversion & Immobilization Facility Licensing, Design, and Construction:*** The schedule of activities leading up to the cold startup of the Front-End Facility is on the critical path. The schedule presented for this case can be compressed but the sequence of activities leading up to the licensing of the Deep Borehole Disposal Facility must be compressed for early completion of disposition.
- ***Operational Period:*** Operations in the Front-End Facility begin as soon as construction of the facility is complete with a half-year cold operations period, followed by 10 years of hot operations in the base case corresponding to the case analyzed in the PEIS. Similarly, the Deep Borehole Disposal Facility activities begin with a half-year of cold operations, followed by 10 years of hot emplacement operations. Disassembly & Conversion/Disassembly, Conversion & Immobilization and emplacement activities are on the critical path, and there is the potential for significant time savings if an accelerated program of processing/ immobilization and emplacement is undertaken. Note that the rate of operation of the borehole itself will be feed-rate limited in the base case; any reduction in the time required to immobilize the Pu can be directly utilized to decrease the time to completion of disposition. An accelerated disposition case in which the disposition period was compressed into 3 years was considered. In this case, emplacement would be completed 15.75 years after the ROD and will result in a 7-year decrease in the overall time to complete disposition. Cost estimates have shown a substantial increase in cost over the 10 year disposition case due primarily to the larger throughput capacity of the Front-End Facility.
- ***Post-Operational Period:*** The Post-Operational period overlaps with the Operational Period owing to the fact that hot operations cease at the Front-End Facility before the actual Deep Borehole Disposal Facility disposition activities are complete. Although important, the Post-Operational activities do not impact the date at which disposition will be complete (i.e., the date the last material is emplaced and sealed into a

here is
get rid

aft
Ho
far
bo
sub
cor
two
req
Op
del
pro

ES.

surpl
prov

isp
ing
isp

press a

that Ru
count

Russian con
option. The
parable in
complete.

I, the ec
y would
pose wo
e-step lic
Disposal
cement

d by a
ess is
e Pre

top licen
sis.

dre
S.
d
mi
tee

of
by
be
is
ie

ES.3.8 Criterion 8: Public and Institutional Acceptance

ES.3.8.1 Ability to Create a Sustainable Consensus

The principal public and institutional acceptance issues for the deep borehole disposition alternatives (and the other deep borehole alternatives) are regulatory and licensing related. As with any of the disposition alternatives, local or regional opposition to the project will likely manifest itself in the regulatory and licensing process as well as in other channels. The relative newness of the deep borehole concept may be a source of public and institutional concern and resistance. This will partially, if not entirely, be offset by the technical soundness and low risks of deep borehole disposition.

Deep borehole disposition complies with the national policy of geologic disposal of radioactive wastes and is consistent with international agreements on waste management. The borehole alternatives are the only disposition alternatives (with the exception of the CANDU reactor alternative) that are independent of the civilian radioactive waste management program and provides an important option for fissile material disposition in the event a mined geologic repository becomes unavailable for timely use. Also, cooperative work in this area with Russia could bolster the 'robustness' of the path forward for the final disposition of surplus fissile materials.

ES.3.8.2 Socioeconomic Impacts

The Deep Borehole Disposal Facility is likely to be sited in a relatively sparsely populated rural area. During the period of construction and operation, spanning a period of about 14 years, the Facility is likely to become a major employer in the region. Thus, its closure would have a substantial economic impact on the area that would require mitigation. The long term ES&H impacts on the region and the extent of land that would be permanently alienated from use would be minimal.

ES.4.0 ADDITIONAL BENEFITS

ES.4.1 Technology Spin-Offs & Contributions to National and International Initiatives

- The deep borehole disposition concept, when successfully demonstrated through the Fissile Materials Disposition Program, may prove to be a viable low-cost alternative to a mined geologic repository for the permanent disposal of High-Level Waste. In this context, it could be attractive for adoption not only in the U.S. but also in foreign countries that have civilian nuclear power generation programs of modest proportions.
- Successful disposition of excess plutonium in deep boreholes could lead the way for future disposal of other small volume, high isolation priority wastes in deep boreholes.



ellet 1
te MOI
id save
el-use
capacity
neing
on and criticality

but would still require
hole facility itself could
hole numbers, depth of
which we

1.0 DESCRIPTION OF IMMOBILIZED DEEP BOREHOLE DISPOSITION ALTERNATIVE: *Immobilized Disposal of Plutonium in Coated Ceramic Pellets in Grout Without Canisters*

The Concept of Fissile Material Disposal in Deep Boreholes


In the deep borehole concept for geologic disposal of surplus fissile materials, the material will be emplaced in the lower part of one or more deep boreholes drilled in tectonically, hydrologically, thermally and geochemically stable rock formations (see Figure 1.0-1). The depths considered for the 'emplacement zone' (2-4 km) in the deep boreholes are several thousands of meters greater than those of mined geologic repositories. Once the emplacement zone of the borehole is filled with the material to be disposed of, the 'isolation zone' extending from the top of the emplacement zone to the ground surface is filled and sealed with appropriate materials.

The immobilized disposal of plutonium in deep boreholes requires the original feed materials to be first converted to a form that is suitable for input to the immobilization process. The conversion process is performed in a Disassembly, Conversion & Immobilization Facility which receives the feed material as plutonium pits, clean plutonium metal, clean oxide, various salts, metal scrap, sand, slag and crucibles, etc. and produces, without further concentration or purification, plutonium dioxide as output. The unpurified plutonium dioxide admixtures that are produced by the disassembly and conversion front-end of the facility are fed to the immobilization back-end of the facility which incorporates the feed materials in a disposal form that has the desired chemical and physical characteristics. The desired characteristics include solidity, high resistance to dissolution by subsurface brines, thermal and compositional stability, fracture resistance and favorable neutron absorption properties.

This end-to-end alternative involves safeguards and security systems at various geographical locations. The systems at the existing front end facilities will be required to continue to meet DOE/NRC protection requirements. Additionally, the inclusion of the front end facilities into the Material Disposition program may require system modifications to comply with IAEA requirements. Process steps conducted at the Borehole and Emplacement Facilities are conducted in part to facilitate the increased proliferation resistance of the material.

This deep borehole disposition alternative meets the requirements of the Fissile Materials Disposition Program in the following ways:

- ***Proliferation Resistance:*** The fissile material will enter the disposition program as an extremely attractive proliferant target. The proliferation resistance of the fissile material form will increase as it moves through the various processing stages in this alternative to the final ceramic pellet disposal form. For post-closure proliferation

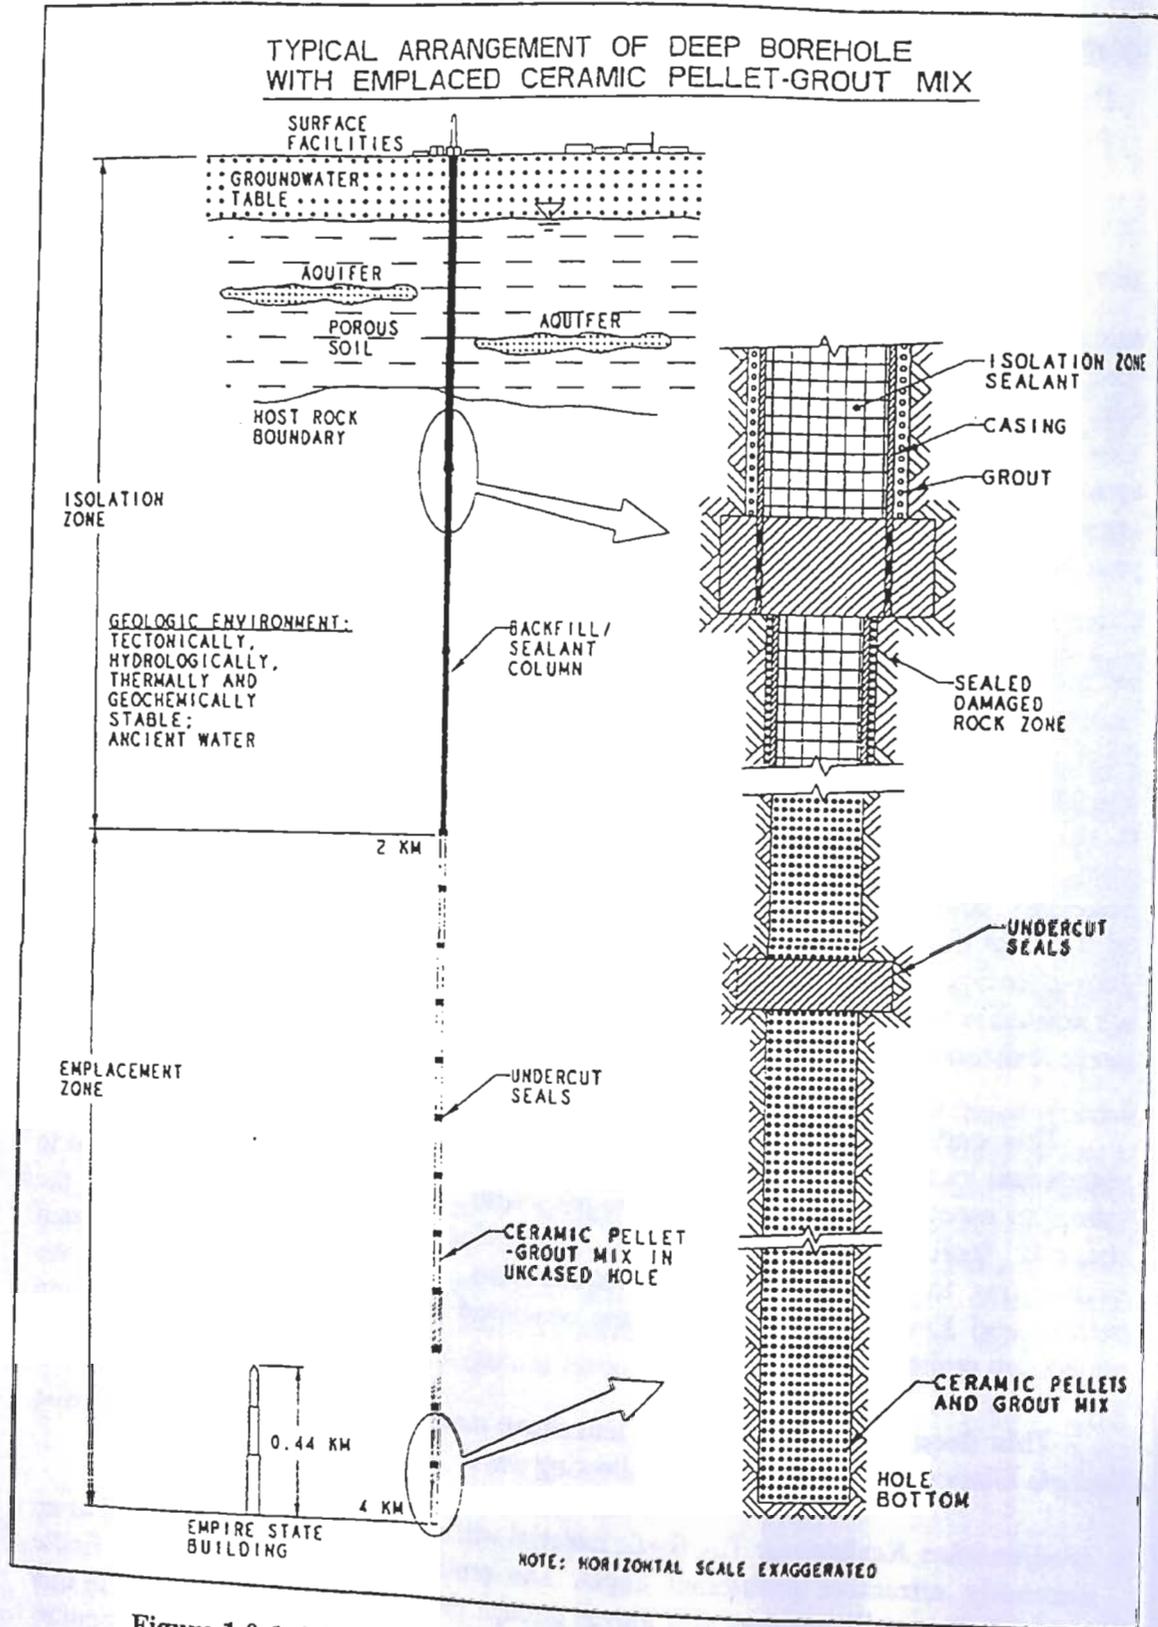

**Figure 1.0-1: The Deep Borehole Disposal Concept for Immobilized
Disposal of Coated Ceramic Pellets in Grout**

August 23, 1996

resistance, the design concept relies on the great depth and resulting physical inaccessibility of the disposal form emplaced in the deep borehole for security against post-closure recovery of the plutonium from the borehole. The disposal form will not be spiked with fission product HLW to increase its diversion resistance. This is because of potential adverse impacts of the HLW on 1) ES&H and cost of processing and emplacing operations, 2) the release rate of plutonium from the disposal form, and 3) the transport barrier due to the expected stagnant fluid flow in the geosphere. The deep borehole design offers a very high degree of security against post-closure recovery by all except the host government in possession of the disposal site. Recovery by even the host government would be a difficult, expensive, hazardous undertaking that can be easily detected. Thus, it is essentially a method for permanent disposal of the disposed material without the intent of later retrieval. Immobilized disposal forms confer additional layers of proliferation resistance because of the degree of physical dilution and the difficulty of chemical separation that increases the proliferation resistance provided by the disposal form. For these reasons, proliferation resistance of this deep borehole disposition alternative is expected to exceed the spent fuel standard after the borehole is sealed, and post-closure surveillance is initiated.

- ***Isolation of Radionuclides from the Biosphere:*** The deep borehole disposition concept relies on the great distance from the biosphere, and the properties and integrity of the surrounding rock to isolate the emplaced fissile radionuclides from the biosphere over an indefinitely long performance period. Thus, the selection of a site that possesses characteristics which favor long-term isolation will be critical to the success of deep borehole disposition. The expectation that the deep borehole concept will be able to offer such performance is based on 1) the very slow movement of groundwater at great depths, 2) the very slow release of radionuclides by the disposal form to the flowing groundwater, 3) the retardation of the movement of dissolved radionuclides in the geosphere by physico-chemical interactions with the rock, 4) the capability to perform the drilling, emplacing and borehole sealing operations without compromising the natural barriers to radionuclide transport provided by the geosphere, or establishing new pathways for transport of the radionuclides to the biosphere, 5) reliance on a low level of plutonium loading in the boreholes to assure criticality safety, and 6) the use of geologically and geochemically compatible materials to stem and seal the borehole after emplacement.
- ***Criticality Safety:*** Criticality safety of the immobilized deep borehole disposition alternative presented in this report relies on 1) the low level of plutonium loading in the ceramic pellet disposal form that is significantly below the level required for criticality in the emplaced configuration and in any physically disrupted configurations, 2) the absence of any credible slow- or fast-acting mechanisms that could release the dilute fissile materials from the disposal form at a sufficiently high rate, transport the material elsewhere, and reconcentrate it sufficiently to achieve a critical mass. The presence of certain neutron absorbing materials, such as titanium, in a primary component of the ceramic matrix itself provides additional safety prior to

- 1. No
- 2. Fe
- Al
- period. f
- 3. Facility
- Disasset
- located a
- site. The

front
proce
build
proce

summariz
Wijesingh

August 23, 1995

e Immo
version E
te, and
ling fac... and processing ca
ory (INEL), Hanford, and the S
options were evaluated. All three
I potentially accommodate front-
nsiderable facility modification, c
be required, depending on the I
it is assumed that the...
ty is located a
re facility site
I through a set
port and identi

ure oxides as part
lization program.

isposition Alternat
st Immobilization F
Facility located at
at the
River
suitabl
ssing

and eq
d. For
Conve
SRS). F
re gene
eristics
data r
tion is

host-rock will be a plutonic/metamorphic crystalline rock in a tectonically, hydrologically, thermally and geochemically stable region. It is assumed that at this generic site, a 4 km deep borehole would be sufficient to ensure long-term performance of the Deep Borehole Disposal Facility. This working assumption will be evaluated for validity in future investigations.

- 4. Performance Period:** The fissile materials emplaced at the Deep Borehole Disposal Facility will be required to remain safe for an indefinitely long period because plutonium has a very long half-life (24,400 years) and the half-life of its fissile decay product, uranium-235, is larger by many orders of magnitude (7.1×10^8 years).

On the basis of preliminary assessments of cost-effectiveness and long-term performance of the emplaced disposal form in the deep borehole environment, the ceramic-coated ceramic pellet disposal form, having a 1% by weight plutonium-loading, was selected by the Deep Borehole Disposition Alternative Team for the Immobilized Deep Borehole Disposal design. In these studies, many types of immobilized disposal forms having different chemical compositions such as titanium ceramics, borosilicate glasses and metallic matrices, and different physical forms such as logs, rods and pellets, were considered. The ceramic used to manufacture the pellets is assumed to be a tailored material containing the phases zirconolite ($\text{CaZrTi}_2\text{O}_7$) and perovskite (CaTiO_3) in appropriate proportions. The simple composition of the fissile material stream, and its relatively low concentration, will assure that phase separation and development of minor intergranular phases during fabrication will be minimal, if not entirely absent. The ceramic pellet disposal form will be first mixed with an equal volume of uncoated ceramic pellets of the same composition and will then be mixed with cement grout to form a wet slurry. Dilution of the plutonium-loaded pellets with plutonium-free pellets reduces the plutonium loading to an effective loading of 0.5% thereby increasing the criticality safety margin while halving the total cost of manufacturing the plutonium-loaded ceramic pellets. The slurry will be emplaced directly in the borehole without canisters and will be allowed to set and harden in-situ. The ceramic coating on the exterior of the plutonium-loaded pellets, is free of plutonium, and is designed to reduce handling hazards by providing a hard, cohesive, protective layer. The intrinsic physical and chemical properties of the plutonium-loaded ceramic material in the interior of the pellets is designed to offer a very high level of long-term performance with respect to criticality and environmental safety.

Because of the adoption of a very high performance disposal form with very low solubility and high thermodynamic stability, improved sealing of the borehole by avoiding the presence of degradable materials (such as canister metals) and difficult-to-seal interfaces within the borehole, and dilution of the plutonium down to a very low loading in a large volume of disposal form, this Immobilized Deep Borehole Disposition Alternative provides a very high level of overall performance. Compared to the Direct Deep Borehole Disposition Alternative design, this alternative provides an inherently higher level of confidence with regard to post-closure isolation, criticality control, post-

Faint, illegible text in the upper right quadrant of the page.

Faint, illegible text in the middle section of the page.



Faint, illegible text in the lower middle section of the page.

Faint, illegible text in the lower right section of the page.

Faint, illegible text in the lower left section of the page.

Aug 21

1.1 TOP-LEVEL PROCESS DESCRIPTION

The Immobilized Deep Borehole Disposition Alternative has key external process interfaces to Feed Source Sites, and internal process interfaces between the Disassembly, Conversion & Immobilization Facility, the Deep Borehole Disposal Facility, the Transportation Task, and the Safeguards and Security Task as shown in Figure 1.1-1.

Surplus plutonium from various source facilities is transported to the Disassembly, Conversion & Immobilization Facility for conversion of these materials to plutonium oxide, immobilization of the oxide in ceramic coated ceramic pellets, and shipment of the plutonium-loaded ceramic pellets to the Deep Borehole Disposal Facility. As shown in the Top-Level Process Flow Diagram in Figure 1.1-2, depending on their chemical compositions and physical attributes, the different feed forms to the facility will be processed differently in the disassembly and conversion front-end of the facility. Pits are disassembled and pass through a demilitarization and hydride-dehydride-oxidation conversion process that produces plutonium oxide. Uranium metal recovered in this process is recycled to Y-12. Plutonium metal, metallic alloys and metal reactor fuels also pass through this process of conversion to oxide. Oxide and oxide-like materials are directly routed to the immobilization process. Plutonium in halides and in sand, slag and crucibles (SS&C) is converted by a halide wash-pyrolysis-calcination process to plutonium oxide. All of these front-end processes only convert the feeds into plutonium dioxide and admixtures of other impurities without further purification or concentration of the Pu. The impure PuO₂ product of the front-end is transferred to the back-end immobilization process of the facility for forming sintered plutonium- and gadolinium-loaded ceramic pellets. To provide a barrier to contamination during handling, the ceramic pellets are subsequently coated with a thin impervious layer of ceramic (a high temperature alumina silicate glaze) that is free of plutonium. The titanium-based ceramic pellets will contain 1% Pu, 0.7% Gd (addition of this neutron absorber is optional) and 98.3% ceramic by mass and will have a density of approximately 4 gm/cm³. The ceramic product is assumed to be a tailored material containing the phases zirconolite (CaZrTi₂O₇) and perovskite (CaTiO₃) in appropriate proportions. The simple composition of the fissile material stream, and its relatively low concentration, will assure that phase separation and development of minor intergranular phases will be minimal, if not entirely absent.

The Deep Borehole Disposal Facility consists of sub-facilities for receiving and storing the waste form, transporting the waste form to the boreholes for mixing with grout, drilling the boreholes, delivering the grout mixture downhole, sealing the borehole and processing the wastes generated by all these activities. In particular, a moveable Drilling Facility is provided for drilling the large diameter boreholes, casing them and sealing hydraulically conductive features in the host-rock. The ceramic pellets are inspected as they are received from the Disassembly, Conversion & Immobilization Facility, stored **until borehole** operations are ready, and are then distributed into a grout mixture at the moveable Emplacement/Sealing Facility. Finally, this mixture is emplaced and sealed in the lower 2 km of the borehole and the remainder of the borehole, which was cased, **is filled with sealant.**

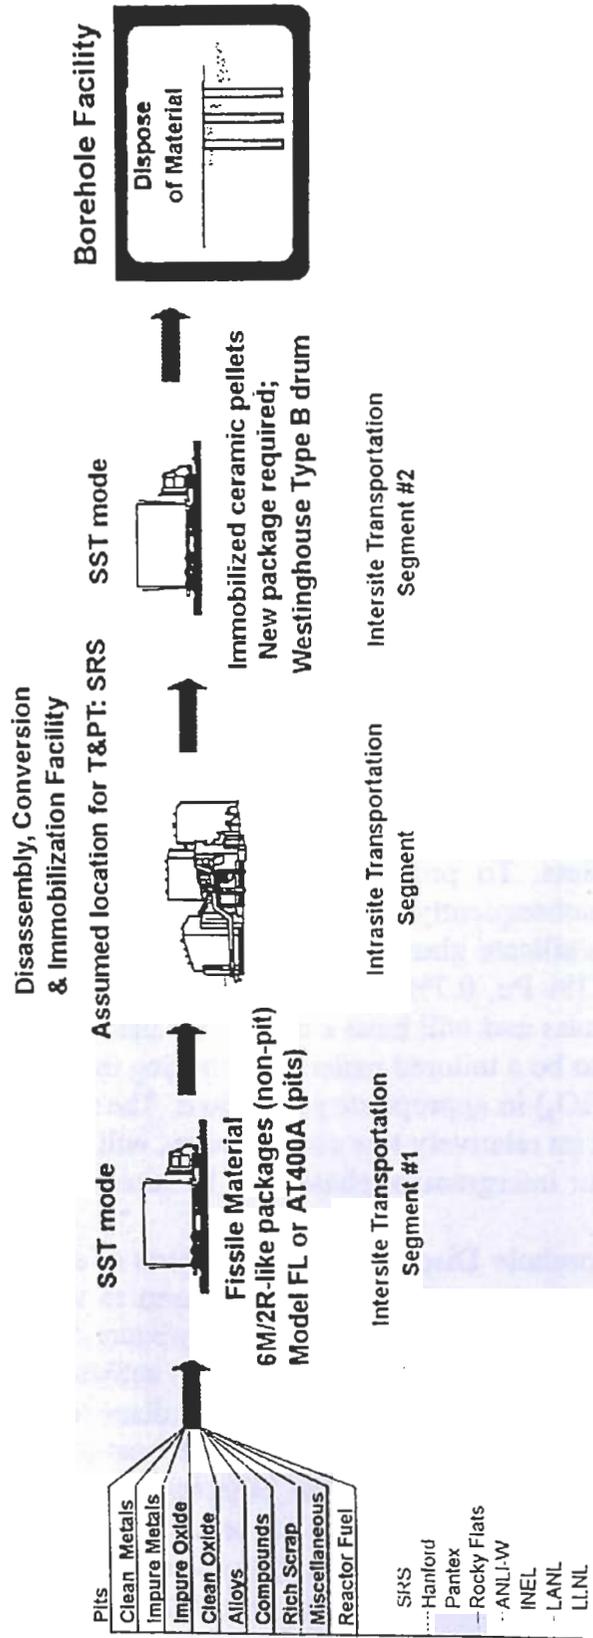


Figure 1.1-1: External Interfaces of the
Immobilized Deep Borehole Disposition Alternative

August 23, 1996

1.2 MASS BALANCE FLOW SHEETS

The Top-Level Pu Mass Balance Flowsheet for the 10 year disposition campaign of the Immobilized Deep Borehole Disposal Alternative is given in Figure 1.2-1. This flowsheet shows the Pu content in the incoming feed materials, the outgoing products, the airborne emissions to the atmosphere, the solid waste streams and the liquid waste streams (if any) of each facility of the Alternative. Although the total Pu content in the solid waste stream is several times the significant Pu quantity (SQ), the solid waste stream is very dilute in Pu concentration and consists of transuranic (TRU) and low-level (LLW) wastes. The TRU waste is shipped to the Waste Isolation Pilot Plant (WIPP) while the LLW is shipped to a shallow land burial site for disposal.




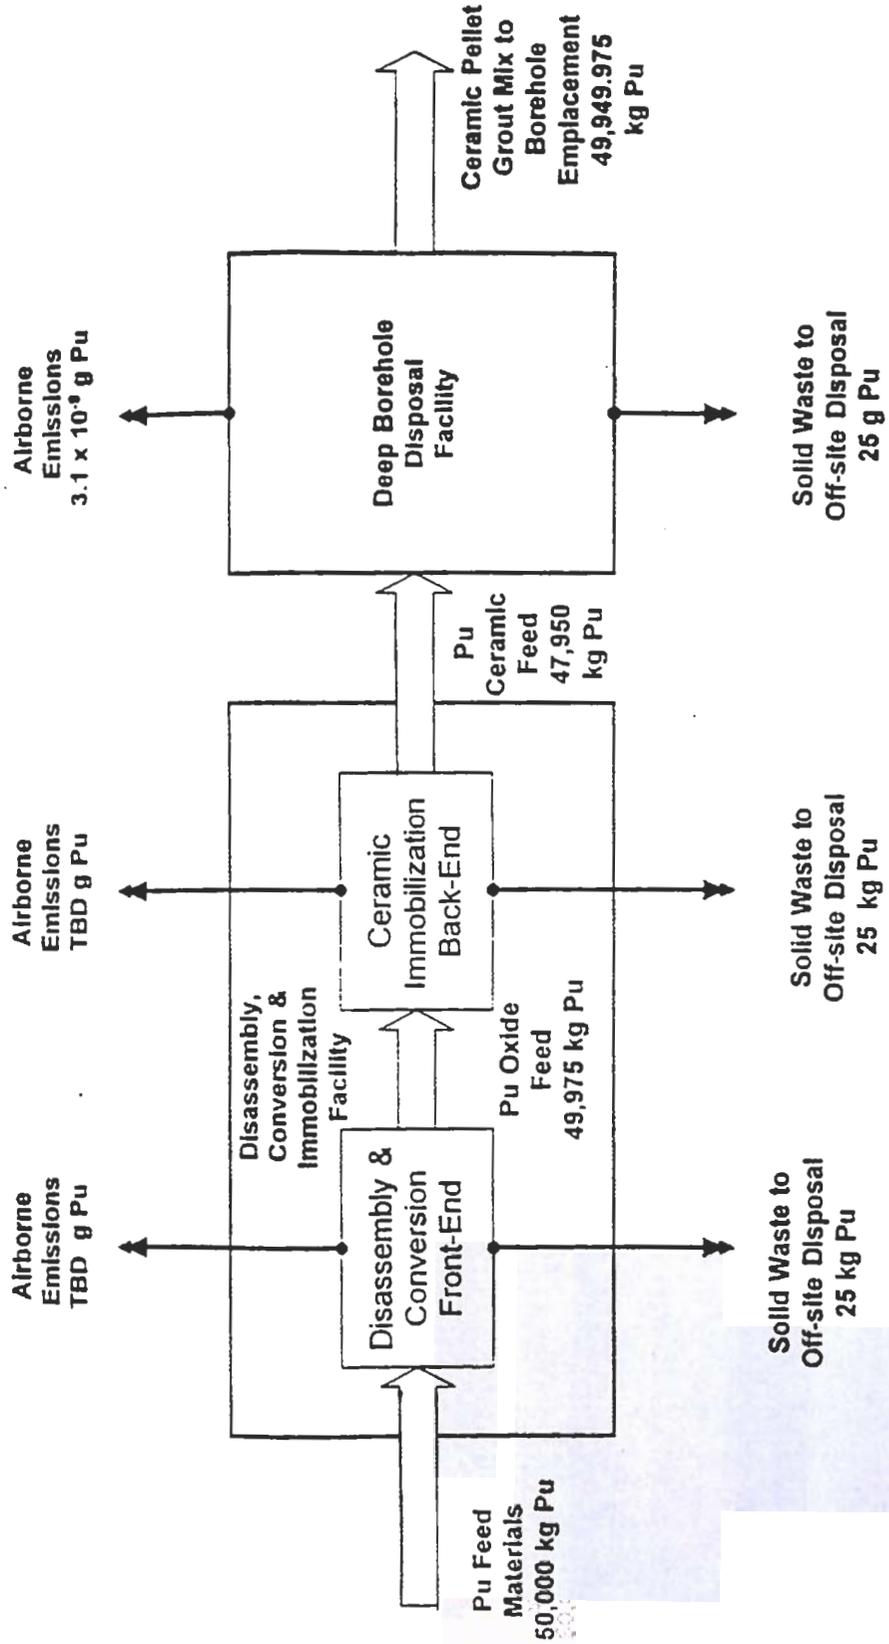


Figure 1.2-1: Plutonium Mass Balance Flow Diagram for the Immobilized Deep Borehole Disposition Alternative

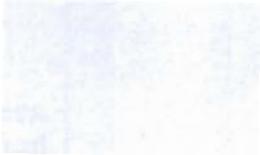

contains

es will be

ss.

The facility process
ation. Facility are of
es and unit op

Disassembly & Conversion Operations

**Truck and CRT Unloading (DC-01):
and Container Restraint Transport (C)**

ents will be delivered to a Truck
dock where the delivery vehicles

August 23,

re
me
o

ted]
the p
stall

unit,

disc
sive

activation. Co
mungee.

will convert glov
open work station

By having econ
rinsed, and package

9. *Concentration (DC-09)*: Plutonium carried into the leachate from the *Oy Decontamination (DC-08)* will be concentrated, and the reclaimed acid will be returned to the *Oy Decontamination* process.
10. *Denitration (DC-10)*: The plutonium-bearing concentrate from *Concentration (DC-09)* will be denitrated to remove NO_x from the concentrate, resulting in plutonium and uranium oxides.
11. *Fuel Decladding (DC-11)*: The major feed to this operation is ZPPR fuel. ZPPR fuel is stainless steel clad metal and oxide fuel. The decladding operation will employ a planing operation where one side of the cladding will be removed. The fuel element will then be sent through a device that will pull the stainless steel hull away from the fuel. The primary waste generated in this operation will be the stainless steel cladding hulls and spent tool bits. The glove box for this operation has a receiving work station, a planing work station, and a dehulling work station.
12. *Size Reduction (DC-12)*: The oxide fuel pellets will be fed into a vibratory grinder. The vibratory grinder uses alumina pellets as the grinding media. A very small fraction of the alumina pellets are eroded away with each batch. This adds a small amount of alumina to the ground oxide. New alumina pellets are added periodically to maintain a set volume of grinding medium. The glove box for this operation has a loading workstation, an unloading workstation, and a workstation that contains the grinder.
13. *Pyrolysis & Calcination (DC-13)*: Carbonaceous materials will go through pyrolysis and calcination to reduce the plutonium to a stable oxide, providing a uniform size and composition. Calcination heats feeds up to 1000°C in an air atmosphere to remove water and other volatiles and convert materials to oxides.
14. *Off-Gas Treatment (DC-14)*: The off gas treatment will be located close to the pyrolysis and calcination process. The equipment will clean the gas before releasing it to the common ventilation system. Off-gases will be quenched, filtered, scrubbed, and vented through HEPA filtration. The off gas treatment system will remove gases such as water, NO_x , SO_x , and particulates. The particulates will be returned to the calcination process.
15. *Halide Wash (DC-15)*: Halide-containing material will be washed with water to dissolve the halide. A small amount of acid may be added to enhance the dissolution of the halide. The glove box for this operation must be resistant to halide solutions and consists of a receiving work station, and a dissolution work station. The solids from this step will be sent to *Calcination (DC-13)*. The solution will be sent to *Precipitation & Filtration (DC-16)* to remove dissolved plutonium.

16. *Precipitation & Filtration (DC-16)*: The solution from the *Halide Wash (DC-15)* will be filtered and the solids sent to calcination. The filtered solution will be precipitated to remove dissolved plutonium. The precipitation operation will add oxalic acid to the solution and precipitate the plutonium out of solution. The solution will be filtered again, and the plutonium oxalate will be sent to calcination. The chloride solution will be sent to aqueous waste processing. The glove box for this operation must be resistant to halide solutions and consists of solution storage tanks, precipitation, and a filtration work station.
17. *Interim D&C Storage (DC-17)*: The Interim D&C Storage is a vault that stores the pretreated product in critically safe geometry until they are processed by the back end.

Ceramic Immobilization Operations

18. *Feed Preparation*: Incoming PuO_2 will be converted to plutonium nitrate by dissolving in concentrated nitric acid using a slab or cascade dissolver. Undissolved heels will be blended with fresh material and recycled. Various components may be added to aid dissolution or minimize corrosion effects on downstream equipment.
19. *Calciner Feed Make-up*: Plutonium nitrate solution will be added to a rotating slurry tank, 0.305 m (12 in.) diameter by 1.07 m (42 in) long, for feed make up. Ceramic precursors and a soluble neutron poison will be added to the slurry with additional water as needed. The slurry tank will rotate at an offset angle, resembling a cement mixer. Veins will run the length of the tank along the inside wall to allow for better mixing.
20. *Milling and Granulation (BH-04)*: The powder product from the calciner is fed to a mill to eliminate any agglomerates or lumps. The milled powder is fed to a rotary drum granulator, where the powder is mixed with a liquid pellet binder. The powder containing 2 wt % binder, forms granules, which facilitates feeding and pressing, and reduces dusting. The granulated powder is screened to remove undersized and oversized material.
21. *Pellet Pressing and Screening (BH-05)*: The pellet press is an anvil powder compacting press. The press cycle consists of the following three steps: feed powder to cavity, compact the powder at about 103 MPa (15,000 psi) to form the pellet, and eject the pellet. Spherical pellets about 2.54 cm (1 in) diameter with a density of 55 percent of maximum theoretical density are produced.
22. *Pellet Screening (BH-06)*: These "green" pellets are automatically inspected and broken pellets, which are recycled after *Crushing and Milling (BH-09)* to *Milling and Granulation (BH-04)* process step. The green pellets that pass screening are then loaded onto boats and sent to sintering.

23. *Pellet Sintering (BH-07)*: A continuous line of boats is pushed through a tunnel-type furnace that has separate temperature control zones for heat up, sintering and cool down. Sintering increases the density of the pellets and burns off the binder. Total time in the furnace is about 8 hours, which consists of a 4 hour heat up, 2 hours at 1200 °C for sintering, and a 2 hour cool down. A special atmosphere is not required in the furnace. Off-gas from the furnace is sent to the off-gas treatment system.
24. *Pellet Inspection (BH-08)*: The pellets flow to an automated inspection station, where each pellet is checked for weight, size, density and surface finish. The small percentage of the pellets that fail inspection are automatically diverted and collected. These failed pellets are crushed, milled and recycled to granulation.
25. *Crushing and Granulation (BH-09)*: The green pellets rejected in the screening step are crushed and milled to a powder and are recycled to the main *Milling and Granulation (BH-04)* process step.
26. *Pellet Coating (BH-10)*: The sintered pellets are coated to prevent breakage and dusting during subsequent handling. An oxide coating is applied to the pellets by plasma or thermal spraying in an automated chamber after the inspection step. In plasma spraying, an oxide material is blown through an electric arc to melt it and the molten oxide is deposited on the pellets, where it solidifies.
27. *Packaging (BH-11)*: The coated pellets are loaded into 208 L (55 gal) drums in a drum filling station. The drums are then moved to the drum closure station, where the drum lids are secured and tamper indicating seals attached. Each drum contains about 500 kg of ceramic pellets, which contain 5.1 kg of plutonium. The loaded drums are decontaminated with high pressure water in a drum decontamination station, air dried, and swiped for contamination. The drums are then assayed to determine plutonium content and transferred to storage or shipped to the borehole disposal site.

Plot Plan

A perspective view of the Disassembly, Conversion & Immobilization Facility is shown in Figure 1.3.1-3. Note that the size, number and arrangement of facility buildings is pre-conceptual and can change significantly as the design progresses. This plot plan conveys general layout information only. **The major structures on the site are as follows:**

- Plutonium Processing Building.
- Radwaste Management and Radiologically Controlled Maintenance Buildings.
- Product Storage Building.

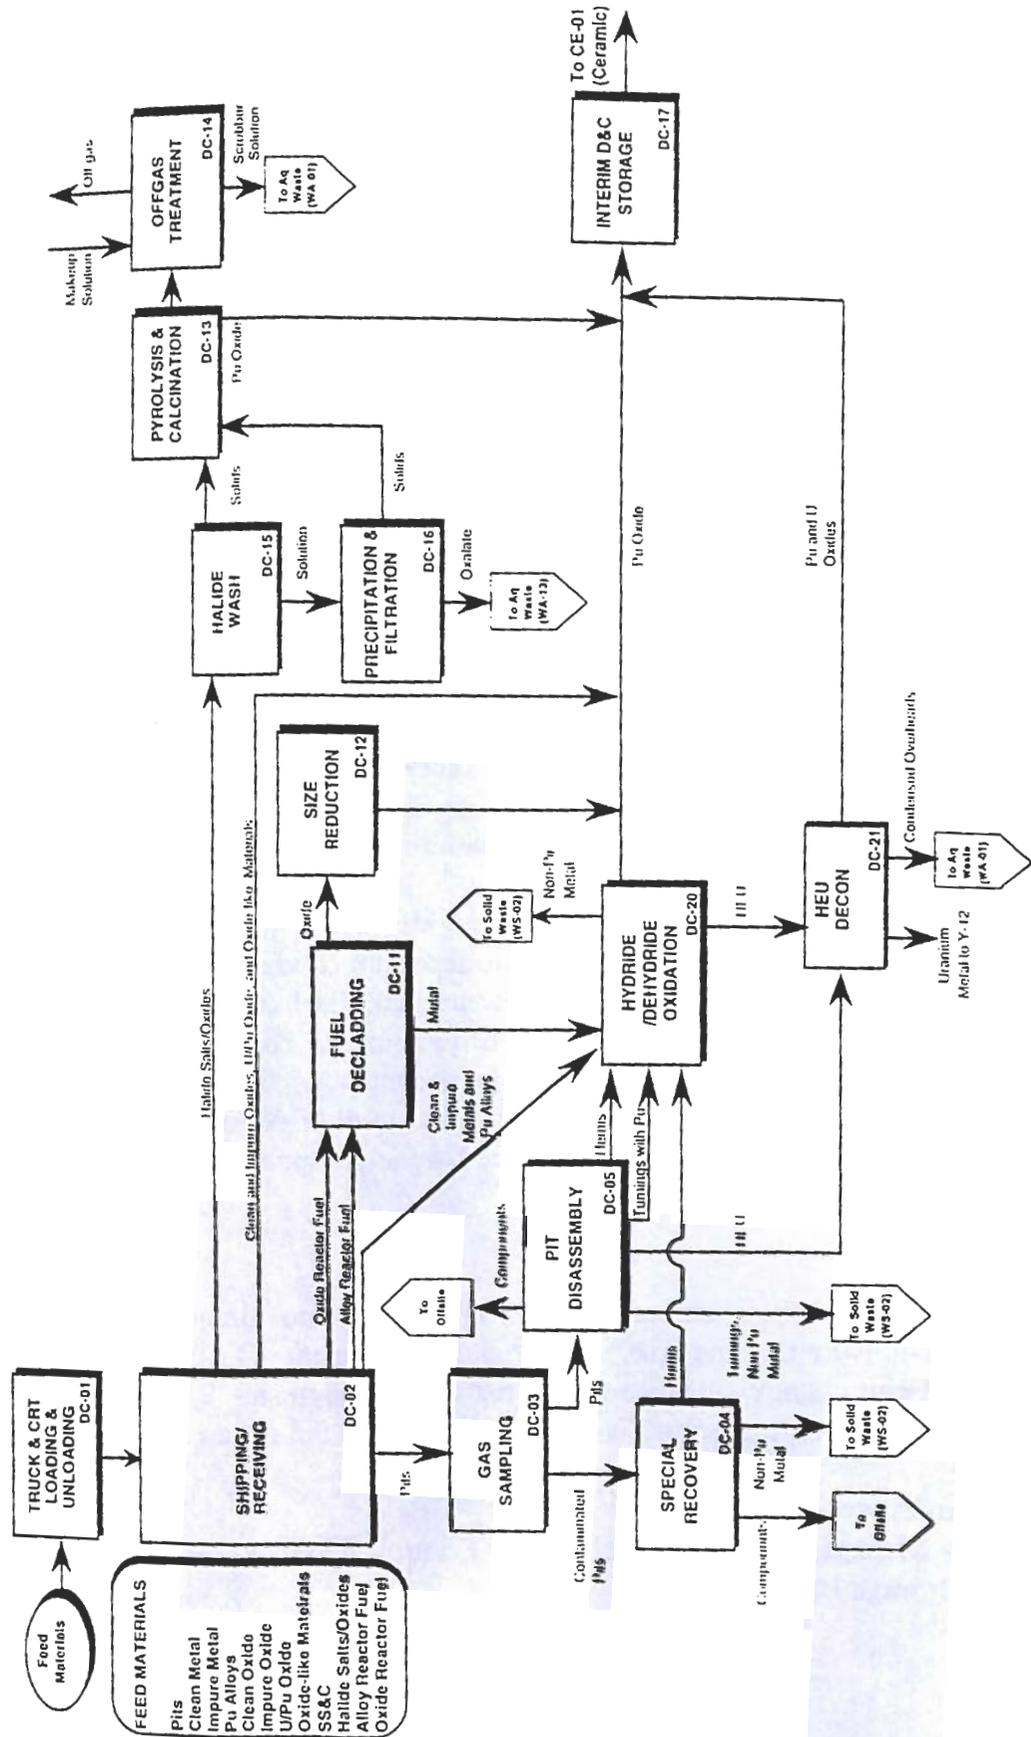


Figure 1.3.1-1: Disassembly and Conversion Process Flow Diagram of the Immobilized Deep Borehole Disposition Facility


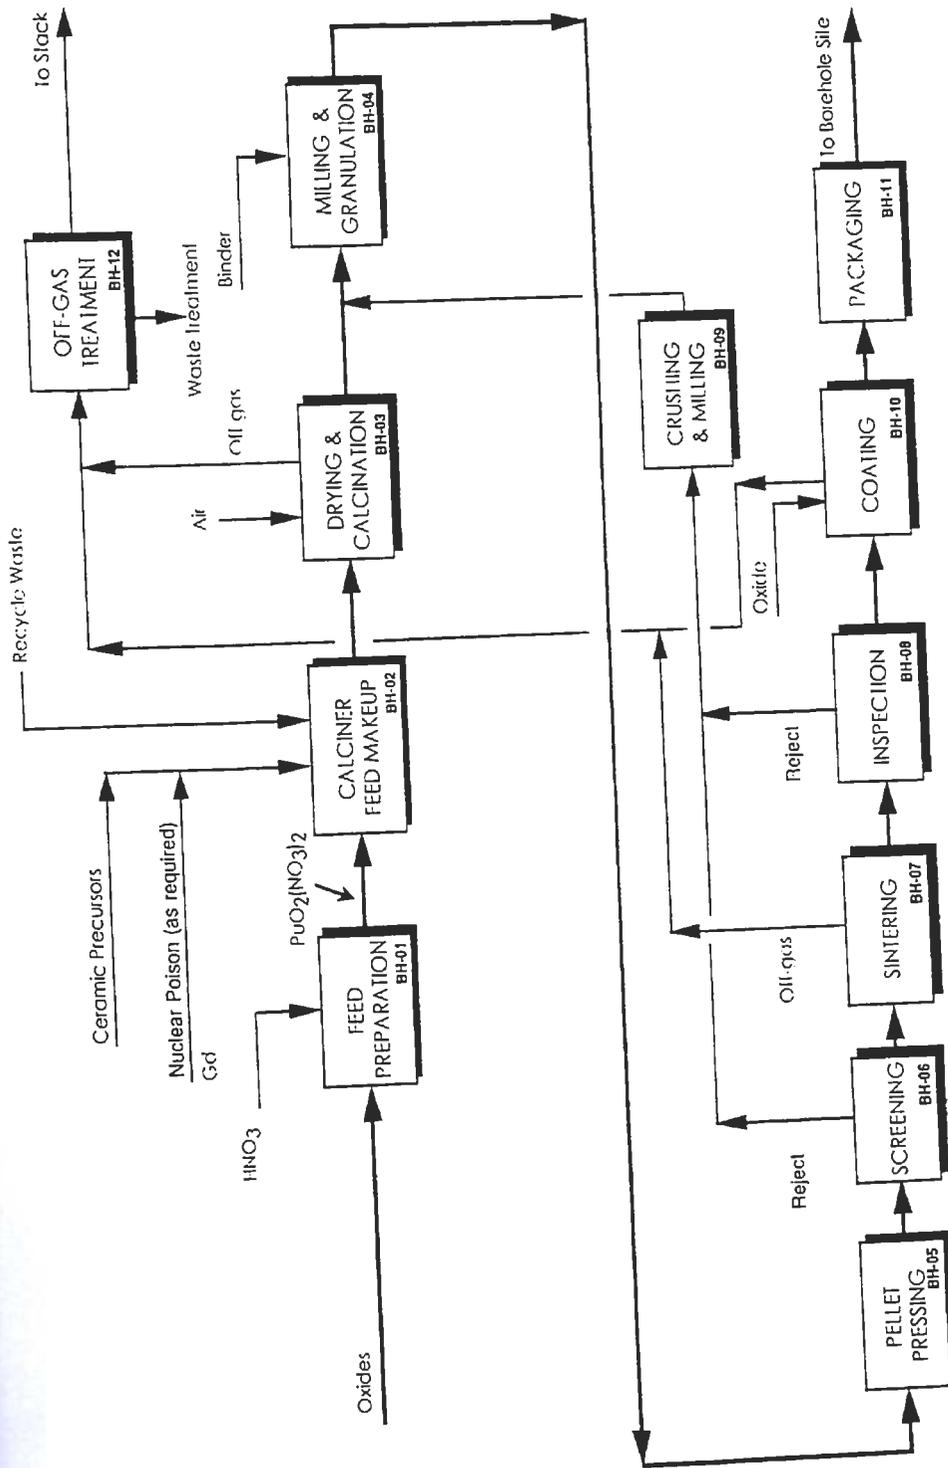


Figure 1.3.1-2: Immobilization Process Flow Diagram of the
Disassembly, Conversion & Immobilization Facility

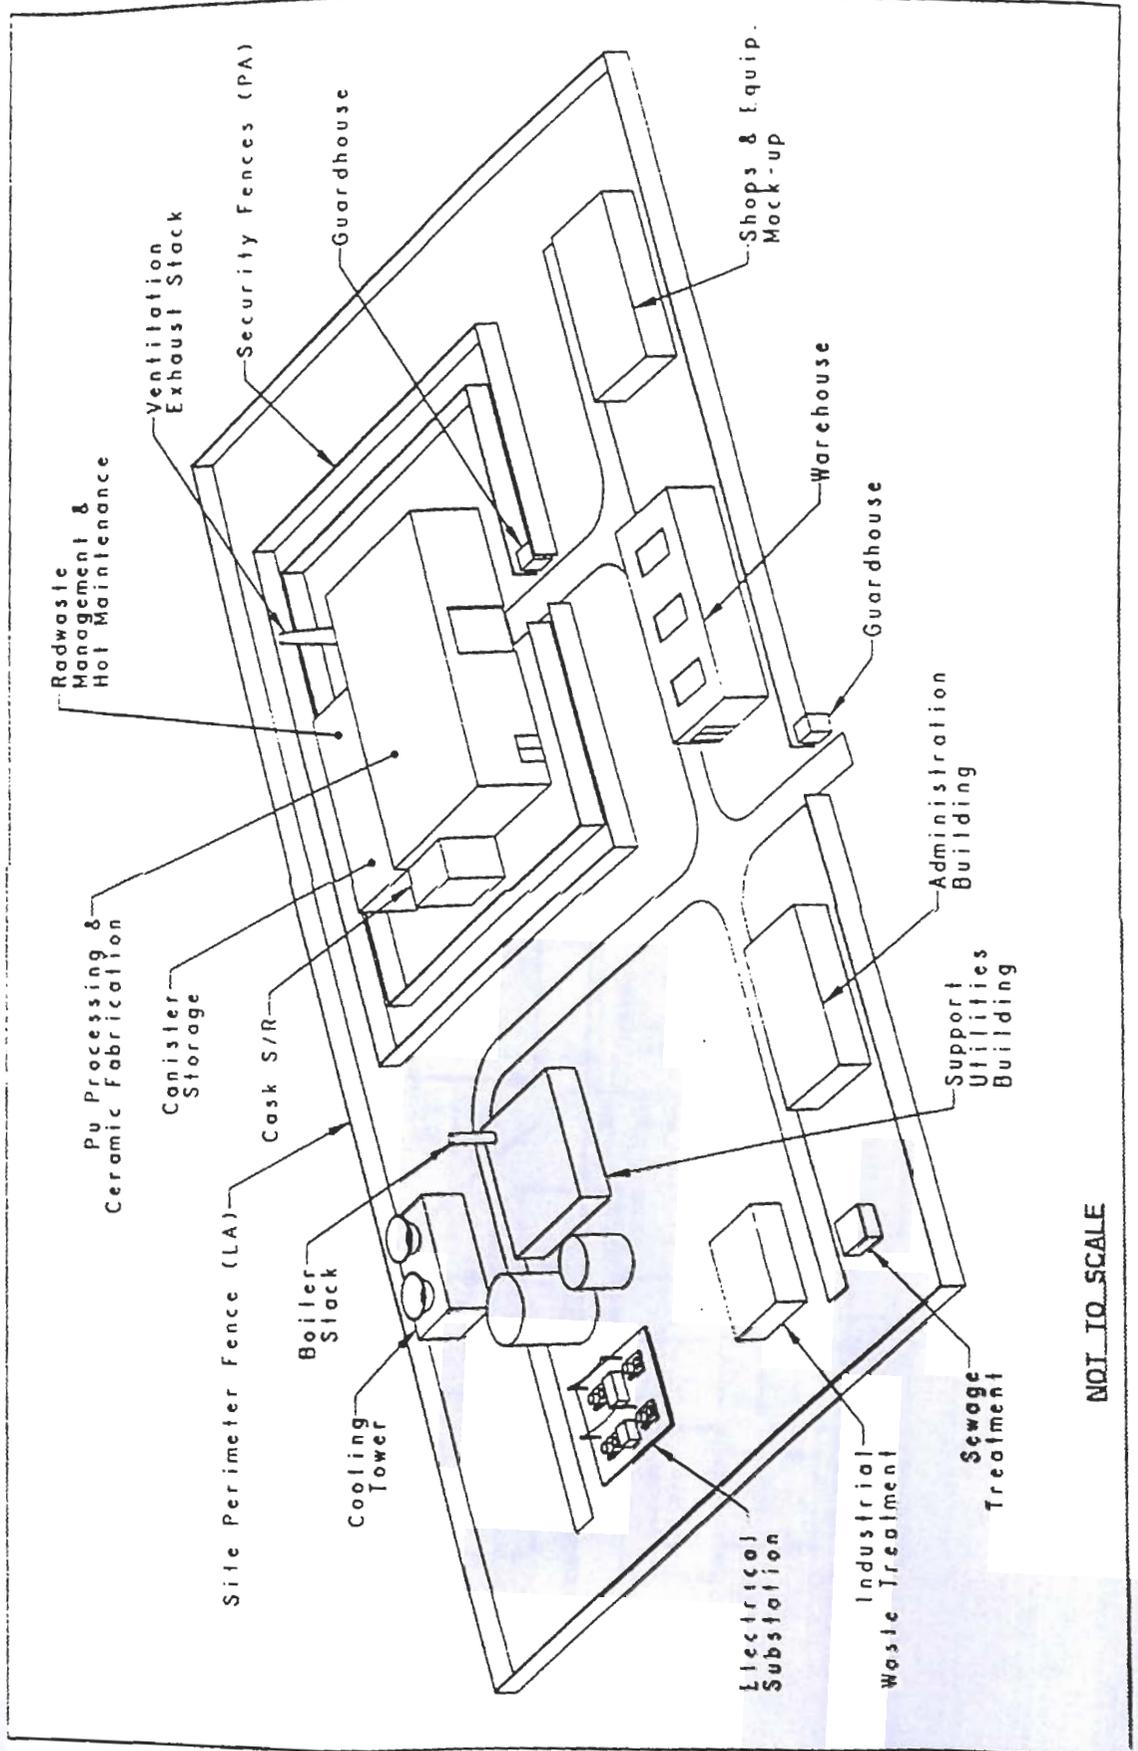

- Miscellaneous support buildings, including the Administration Building, the Support Utilities Building, the Industrial Waste and Sanitary Waste Treatment Buildings, the Shops Building, and the Warehouse.
- Disassembly, Conversion & Immobilization Facility forced draft cooling tower.
- Disassembly, Conversion & Immobilization Facility ventilation exhaust and boiler stacks.
- Perimeter Intrusion Detection and Assessment System (PIDAS) double fence surrounding the site protected area.
- The Limited Area and Protected Area guardhouses
- The site Electrical Substation.

Building Descriptions

The Disassembly, Conversion & Immobilization Facility data are summarized in Table 1.3.1-1.

Table 1.3.1-1: Disassembly, Conversion & Immobilization Facility Data

Building Name	Footprint (m ²)	Number of Levels	Special Materials	Construction Type
Pu Processing Building	8,914	2	SNM	Reinforced Concrete
Radwaste Management Building	3,485	1	SNM	Reinforced Concrete
Radiologically Controlled Maintenance Building	1,394	1	SNM	Reinforced Concrete
Product Storage Building	698	1	SNM	Reinforced Concrete
Support Utilities Building	1,394	1	None	Metal Frame
Administration Building	1,672	1	None	Metal Frame
Warehouse	4,924	1	None	Metal Frame
Shops Building	6,689	1	None	Metal Frame
Generator Building	372	1	None	Metal Frame
Industrial Waste Treatment Building	1,828	1	None	Metal Frame
Sanitary Waste Treatment Building	298	1	None	Metal Frame
Guardhouses (2)	149	2	None	Reinforced Concrete
Cold Chemical Storage Building	698	1	None	Metal Frame
Cooling Tower	929	—	—	—

The Plutonium Processing Building is a reinforced concrete structure housing a central processing area where the main plutonium processing area is located, surrounded

by various support areas. The building is divided into two main areas: Disassembly & Conversion Processing and Ceramic Immobilization consisting of the following main functional areas:

- Areas for receiving and shipping plutonium as pit and non-pit feed materials or Pu-loaded ceramic pellet product in Safe Secure Trailers (SSTs).
- A shipping and receiving area for cold chemical feed materials and other non-radioactive materials.
- Facilities for accountability measurements of the special nuclear material received or shipped.
- A storage vault for special nuclear material received.
- Glove box areas for pit disassembly and plutonium conversion processes
- Glove box areas for plutonium-loaded ceramic pellet processing.
- An analytical laboratory for analysis of process samples.
- An equipment decontamination area for decontamination, maintenance and repair of process equipment.
- Facilities for mechanical and electrical support systems and clean equipment maintenance.
- A cold feed storage and preparation area for non-radioactive feed materials for the ceramic process (ceramic precursors, chemicals, etc.)
- A scrap treatment area to allow treatment and recycle of plutonium from contaminated process materials.
- An area for entry control to the facility, personnel rooms, change rooms and health physics operations.
- A control room.
- A stacker/retriever vault containing a remotely operated stacker/retriever for transport of materials between storage and processing areas.
- HVAC equipment.

A Product Storage Building sized to store one year of product drums produced with space provided for the full 10 years operation; a Radiologically Controlled Maintenance Building for maintenance and repair of process equipment; and a Radiological Waste Management Building for handling, treatment, packaging and shipping of low level transuranic wastes; are immediately adjacent to the Plutonium Processing Building. The facility will be designed in accordance with DOE Order 6430.1A, *General Decontamination Criteria*.

The plutonium processing equipment is housed in glove box enclosures located in processing rooms. Glove box equipment layout is grouped by primary process operation.

Normal process operations will be performed both manually and using automated systems. Remote operations will be employed where necessary to minimize operator radiation exposure. Maintenance of equipment within the process glove boxes will be by gloves after removal of plutonium from the process equipment.

The process support systems are primarily housed within the process building with the exception of the process gas supply systems, which will be located in the yard adjacent to the process building.

Cold chemical storage and makeup includes areas at grade level where chemicals, ceramic additives, cement, etc. can be stored. Storage capacity of approximately 3 months is provided. Chemical and additive makeup and process run tanks are located at upper levels of the building to allow gravity feed to the process.

As noted above, the process gas supply bottles/storage tanks are located in the yard as required by DOE order 6430.1A. Supply manifolds will deliver gas to the appropriate process equipment or glove boxes. Glove boxes containing plutonium metal will be operated under a nitrogen atmosphere to prevent a plutonium metal fire. Hydriding glove boxes will be operated under an argon atmosphere.

The plutonium feed material storage and handling system consists of a plutonium shipping container crane; a plutonium storage container unloading, weighing, bar code reading and assay device; and a plutonium storage container transfer device. A plutonium storage vault meeting the requirements of DOE Orders 6430.1A Section 1305 with a capacity of six months feed and served by a stacker-retriever is provided.

The process material handling system will consist of conveyors within and between glove box enclosures to provide for confined material transfers. A remotely operated stacker-retriever will provide material transfers to and from storage of plutonium-containing materials, samples, etc. within a storage vault adjacent to the process glove box areas.

Equipment, piping and other components can be decontaminated in the equipment decontamination area. A scrap treatment area has been provided to allow treatment of off-specification process materials, contaminated equipment and components to recover plutonium and recycle it back into the process. The cell will be equipped with equipment suitable for size reduction and process feed makeup of off-specification ceramic material from the pressing, sintering, and coating operations. Also, decontamination and leaching equipment will be provided to allow recovery of plutonium from process equipment and return the solutions to the process. Other off-specification materials from the process will be recycled to the appropriate equipment in the plutonium process.

A central process control system will provide remote monitoring of all main process operations. Local operating stations are provided for each workstation. The control system will be a computer-based distributed control system with local control units providing information to a common data highway which will transmit data to a central computer system. A separate material control and accountability computer will receive data from the process as required to meet plutonium material control and accountability (MC&A) goals.

An analytical laboratory will be provided to allow analysis of process materials to assure product specifications and plutonium MC&A goals are met. The laboratory will be provided with mass spectrographs, calorimeters, nondestructive assay equipment, radiological chemical analytical equipment, etc. as necessary to provide a fully self-sufficient onsite laboratory to meet the needs of the facility.

Product Storage Building

Storage of product drums is provided in a the Product Storage Building equipped with drum storage racks, a remotely operated forklift (or stacker-retriever) and a computerized tamper-indicating system to monitor and permit only authorized drum movement. Initial onsite storage capacity is one year with space provided for expansion of this capacity to the full 10 years of operation.

Radiologically Controlled Maintenance Buildings

The Radiologically Controlled Maintenance Building is located inside the inner security fence adjacent to the Plutonium Processing Building. It provides facilities for the maintenance and repair of process equipment from the Plutonium Processing Facility, the Radwaste Management Building or the Product Storage Building. Shop areas are provided for equipment receiving and decontamination, equipment disassembly and repair, machining, electrical and controls repair, and equipment testing. An area is also provided for entry control to the facility, personnel change rooms and a health protection room. Equipment is decontaminated prior to transfer to the Radiologically Controlled Maintenance Shop. Failed process equipment and other low level waste materials generated in shop operations will be transferred to the adjacent Radwaste Management Building to be packaged for shipment offsite.

Radwaste Management Facilities

Waste management facilities to handle the radwastes generated by facility operations are located in the Radwaste Management Building immediately adjacent to the Plutonium Processing Building.

Radwaste treatment systems housed in this area include the following:

- *Process liquid radwaste:* The process liquid radwaste treatment facilities include the recycle waste evaporator, nitric acid recovery system, and the LLW/TRU radwaste solidification systems. Since these systems will handle relatively low-activity waste streams, they will generally be located in controlled access processing rooms equipped with room ventilation confinement zoning appropriate to the expected levels of contamination within the room. Mixed waste will be segregated from other waste forms and stored for shipment to offsite treatment facilities.
- *Process solid radwaste:* Process solid radwaste treatment systems will also be housed in the Radwaste Management Building. Solid waste generated from the glove box operations will generally be handled and processed in glove box enclosures. Where fume or dust generation is anticipated, (i.e. cementing, volume reduction, etc.) equipment will be installed in glove box enclosures supplied with local filters, mist eliminators, condensers, etc. as required to minimize the spread of contamination to the glove box ventilation system. The equipment will be further isolated in processing rooms provided with ventilation zoning appropriate to the levels of contamination expected. Solid wastes generated within the process will be segregated into low level, TRU, and mixed waste. Solid waste assay, segregation, decontamination, and volume reduction facilities will be provided to minimize the volume of waste shipped from the facility. Waste packaging and shipping facilities for both LLW and TRU waste will be provided. Solid radwaste consisting of process gaseous radwaste equipment components such as local sintered stainless steel filters, condensers, etc. are generally not expected to be highly contaminated and will normally be designed to be contact handled and processed within glove box enclosures or bagged out into suitable containers.
- *Gaseous Effluents:* Gaseous effluents will be filtered, condensed, scrubbed, absorbed, etc. as required to meet DOE and other applicable regulatory requirements. Local condensers, mist eliminators, and sintered metal filters with blowback to the process are provided for plutonium oxidation, calcination, pressing and other operations where particulate generation is expected. HEPA filters are provided at both inlets and outlets of glove box enclosures handling plutonium. Two stages of HEPA filters are provided in the process off-gas system and a NO_x absorption column and appropriate heaters, knockout drums, etc. as required to assure that releases are below acceptable limits. Chemical removal of NO_x may be required to meet effluent limits. Discharge of building HVAC exhaust air will be through three stages of HEPA filters prior to release.
- *Utility wastewater discharges:* These discharges, including cooling tower and boiler blowdown, cold chemical area liquid effluents and nonradioactive liquid ceramic additive liquid wastes will be treated and discharged in an industrial wastewater

al,

was:

atment Fa
ntilating a
ystem for
multiple o
ity to provi
equipment,
g-tower wat
is any radio

IVAC). These syst

induced draft, cros
process and HVA

cooling loop
process eqt

ns are connected to the cooling

- A central s
steam for p
produces st
- Compress-
Redundant
system is p
dryers and
breathing a
Plutonium
- Electric po
system and distributes i

lant. C
uses
rich is
ystem
main,
l thro
hed to
an pr
sing B
he si
distributes i

me. G
ating
he si
nt a
rovi-
stru-
n sys
ing a
pow
ed ve

the pro
ssicant typ
in receiver
througho
the utility

a capacity of 10 MW and includes the primary switching and voltage transformer facilities for the site. The electrical system also includes two, redundant, 700-kW emergency power diesel generators, housed in a seismic and tornado-resistant structure, to ensure the operation of all safety-related systems during a power outage. Uninterruptible power supply (UPS) systems ensure continued operation of safety related equipment and systems during a power outage.


- A perimeter security system, including a guardhouse at each entry point to the site or to the inner security area. All facilities where radioactive materials are handled, and facilities necessary for the safe operation of the process facilities are surrounded by double security fences within the outer site perimeter fence.

1.3.2 Generic Site Description

Site Map

The Disassembly, Conversion & Immobilization Facility Site Map is shown in Figure 1.3.2-1. The site is surrounded by multiple fences for security. The main processing facilities are located within a double security fence and include the Plutonium Processing Facility, the adjacent Radwaste Management Building, Radiologically Controlled Maintenance Shop, and Product Storage Building. Support facilities including the Administration Building, Warehouse, Shops Building, the Support Utilities Building, the Cooling Tower and the Electrical Substation. The Industrial Waste Treatment Building and the Sanitary Waste Treatment Facility are located outside the security area, but within the overall Site Perimeter Fence.

Access to the site is controlled at guardhouses located at both the perimeter fence and at the security fence surrounding the process area. A ventilation exhaust stack discharges process and ventilation air from the Plutonium Processing Building, the Radwaste Management Building, the Product Storage Building and the Radiologically Controlled Maintenance Shop. Other sources of airborne emissions from the site are the boiler stack at the Support Utilities Building and HVAC exhaust outlets from the non-process support buildings outside the security fence. All liquid effluents from the site are from either the Industrial Waste Treatment Facility or from the Sanitary Waste Treatment Facility.

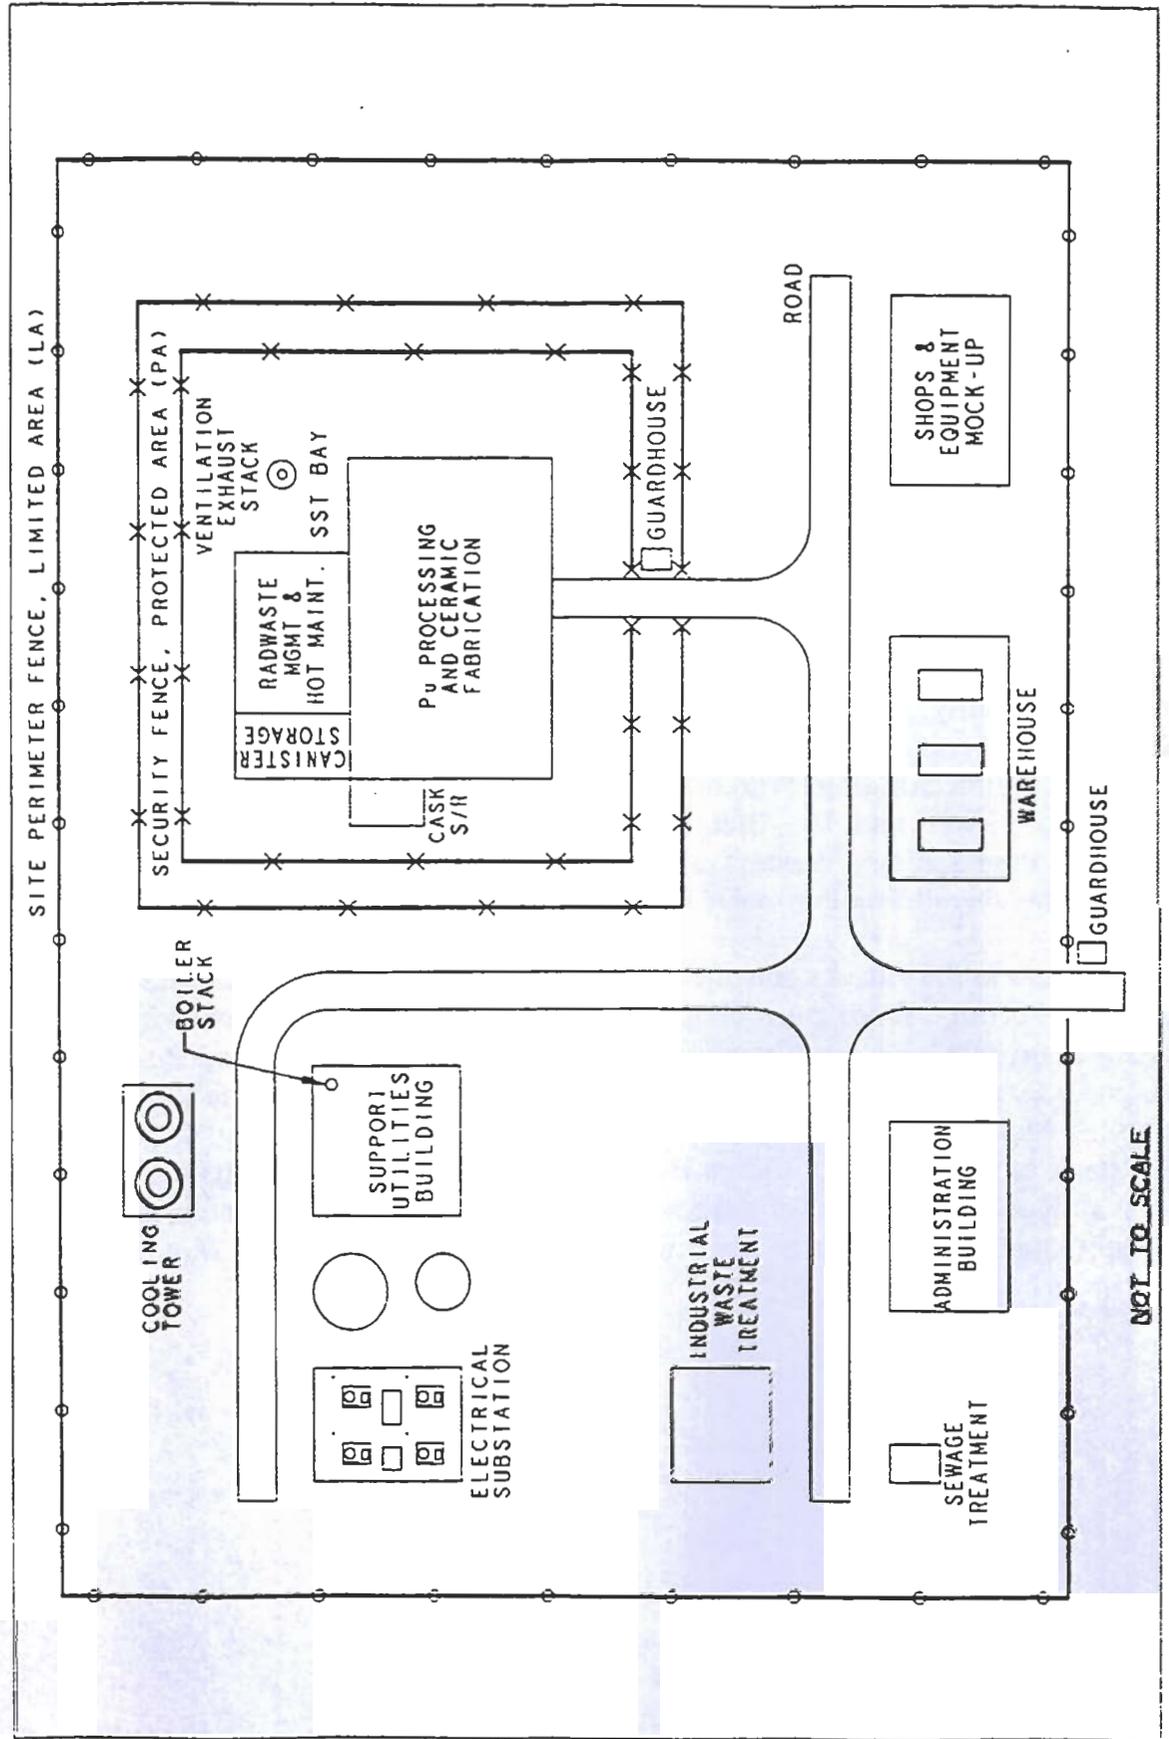

l, or solid fi
e management c
ice Conservati
from Disasse
l of at the Waste Isolation Pi
ance Criteria

g. 410
ration, s
wastes are converted to wa
did waste as final form p
id certified prior to shipp
wastes are surveyed and
ixed wa
ides equipment and waste cont

assay e
and th
uted cement, or compacted
did TRU waste
ent emplac
burial site f
gloves) are j
rocessing,
decontamina

recy
the
over
anal
the

akeup tank for ince

effluents ar
o bottoms
d

ank. After sampli
tank. Nitric acid
ide dissolution.

Cement will be
waste management

ter chemicals may be required o

Management S

The waste mana
receiving facility or disp:

all i
all o
stance criteri
ermit limits.

Waste

t Waste

generat
recycled
I proc

1.3.5.1

Plutonium cont
Building via Safe-Secu
to each other, intrasite
required. All handling c

gically Contr

Build
e wi
duct

Building or the Rad

Hazardous chemicals will be received from offsite and stored in the building where they are used so that there will be no intrasite transport required. Hazardous chemicals will be used in the Plutonium Processing Building, the Radwaste Management Building, the Radiologically Controlled Maintenance Shop, the Support Utilities Building, the Cooling Tower, the Industrial Waste Treatment Facility and the Sanitary Waste Treatment Plant.

1.3.6 Safeguards and Security

The domestic safeguards and security program is designed to ensure that surplus fissile materials, which are converted into long-term disposition forms, meet security objectives. The vulnerabilities, designs, technologies, and operations associated with Safeguards and Security are interrelated in many areas relative to physical protection, nuclear materials control and accountability (NMC&A), and international safeguards containment and surveillance (C/S).

DOE interests are protected against a range of threats which include unauthorized access; theft or diversion of special nuclear material; industrial, radiological, or toxicological sabotage; espionage; loss or theft of classified information or property; and other hostile acts which may cause unacceptable adverse impacts on national security or on the health and safety of DOE and contractor employees, the public, or the environment. The US regulatory requirements are found in DOE Orders, NRC regulatory documents, and US Code of Federal Regulations. The domestic threat is based upon the US DOE Design Basis Threat, and the Fissile Material Dispositions Program's Threat Guidance, and is potentially composed of both insiders and outsiders.

Protection of surplus fissile material during all phases of the operation requires stringent protection measures to deter, detect, assess, delay, and respond to adversary attacks.

Protection planning is based on DOE/NRC requirements and site specific vulnerability assessments (VA). The VAs identify the appropriate levels of protection for each potential type of material against each potential type of adversary and threat (e.g. theft or sabotage). Material is protected while in-storage, in-process, in-transit, and final disposition.

1.3.6.1 Physical Security System Requirements and Facilities

Programmatic activities shall be conducted within designated security areas (i.e., Property Protection, Limited, Protected, Material Access). Structures and protection measures utilized as security barriers will incorporate appropriate levels of adversary delay and denial. Barriers accommodate concentric layers of graded protection and defense-in-depth measures. Types of passive barriers include fencing, hardened walls, vault doors, locking systems, geologic formations, etc. Active barriers may be used, and

include dispersed foam, smoke, etc. Associated delay levels are determined by barrier technology data and/or the conduct of vulnerability assessment performance testing. Detection and assessment will be accomplished through the most cost-effective integrated use of alarms, personnel and material sensors, closed circuit television, lighting, and protective force personnel, and accommodate concentric layers of graded protection and defense-in-depth measures. These measures include permanent or temporary Perimeter Intrusion Detection and Assessment Systems (PIDAS) with multiple complimentary sensors, interior alarms, explosive and metal detectors, SNM monitors, primary and secondary alarm monitoring and communication consoles, dedicated uninterruptible power sources, protective patrols, etc.

1.3.6.2 Materials Control and Accountability

The material control and accountability (MC&A) program includes a system of checks and balances sufficient to detect and deter the unauthorized diversion or removal of special nuclear material from its authorized location and provide assurance that nuclear materials are in their authorized locations and are being used for authorized purposes. The facility's nuclear MC&A program, consistent with a graded materials safeguards and security program encompasses the systems and measurements necessary to track nuclear material inventories, control access, provide timely detection capability for loss and diversion of nuclear materials, and assure the integrity of the systems and measurement-in-place.

1.3.6.3 IAEA Safeguards Requirements

The International Atomic Energy Agency (IAEA) is responsible for independently verifying that significant quantities of nuclear material have not been diverted for unauthorized uses. The primary goal of the IAEA is to detect the theft or diversion of one 'significant quantity' of SNM within a specified period of time. The time period is intended to be related to the time required to convert different forms of nuclear material to the metallic component required for a nuclear explosive. One significant quantity (SQ) is 8 kg (*IAEA Safeguards Glossary, 1987*).

Pit disassembly and conversion, the material storage and processing activities at the Disassembly, Conversion & Immobilization Facility will be designed to accommodate international and domestic safeguards, security protection, and transparency requirements. An International Inspection Area is used by international inspectors for inspection and verification of Surplus Material. The physical inventory verification (PIV) method is dependent on the type and form of material. The inspection area houses international agency provided equipment to conduct authorized surveillance without allowing access to classified information. These activities may also include site visits for the purpose of reviewing documentation and recorded information from installed instrumentation and CCTV cameras. Special uninterruptible power supply


(UPS) and other systems may be required by international agreements. International requirements are found in IAEA Information Circulars, and the *IAEA Safeguards Criteria 1991-1995 (1990)*.

1.4 DEEP BOREHOLE DISPOSAL FACILITY

Facility Design Criteria and Design Basis

In this Section, the design criteria and assumptions used to guide the design of the Deep Borehole Disposal Facility for the Immobilized Alternative are:

1. **Feed Form Type and Size:** The fissile material feed will be in the form of ceramic-coated plutonium-loaded ceramic pellets (approximately 2.54 cm (1 in.) diameter; rough textured exterior surface) manufactured at an off-site immobilization facility. The ceramic coating does not contain any plutonium. The exact chemical composition of the ceramic pellets is as yet undefined and remains to be determined after further investigation of long-term performance and durability. As a working assumption, the density of the ceramic pellets is taken to be 4,000 kg/m³.
2. **Plutonium Throughput:** The total fissile material disposal capacity of the Facility is 50 t of plutonium. The disposition rate is 5 t/year over a 10 year operational period. The Base Case surge rate will be 10 t/year.
3. **Feed Form Plutonium-Loading Level and Throughput:** The plutonium-loading mass fraction of the ceramic coated ceramic pellet disposal form is 1%. The Pu-loaded ceramic pellets are mixed with an equal volume of unloaded ceramic pellets before emplacement for an 'effective' Pu-loaded mass fraction of 0.5%. A total of 5,000 t of plutonium-loaded pellets is disposed of at a rate of 500 t/year over a 10 year disposition period. The surge rate of disposal of Pu-loaded ceramic is 1,000 t/year.
4. **No Radioactive Deterrent:** The immobilized disposal forms considered for deep borehole disposition will not be spiked with high level nuclear waste.
5. **Criticality Safety:** The criticality safety of the ceramic pellet-grout mix at an effective 0.5% Pu-loading of the pellets during intrasite transportation, processing, emplacement, and post-emplacement performance in the short-term, will be ensured by spatial dispersal. However, for additional long-term insurance, a package of neutron poisons (i.e., absorbers) will be added to the coated ceramic pellet disposal form during its manufacture at the immobilization facility. Criticality safety during the long-term post-closure performance period when the hardened ceramic pellet-grout mix may be chemically altered, the plutonium has leached out and, possibly, reconcentrated elsewhere, has not been assessed as yet.
6. **Canister Performance Allocation:** No emplacement canisters are used in this design. The ceramic pellet-grout mix is directly poured into the uncased emplacement zone of the borehole.
7. **Borehole Geometry:** The telescoped borehole geometry adopted in this design represents the largest bottom-hole diameter (0.660 m (26 in)) that can be reliably drilled to a depth of 4 km in competent plutonic/metamorphic rock formations using standard existing equipment. The bottom 2 km uncased section of the borehole will be the disposal form Emplacement Zone. The upper 2 km cased section is the Isolation Zone of the borehole and is used to seal the borehole and isolate its contents from the biosphere. The borehole depth required to ensure long-term performance is

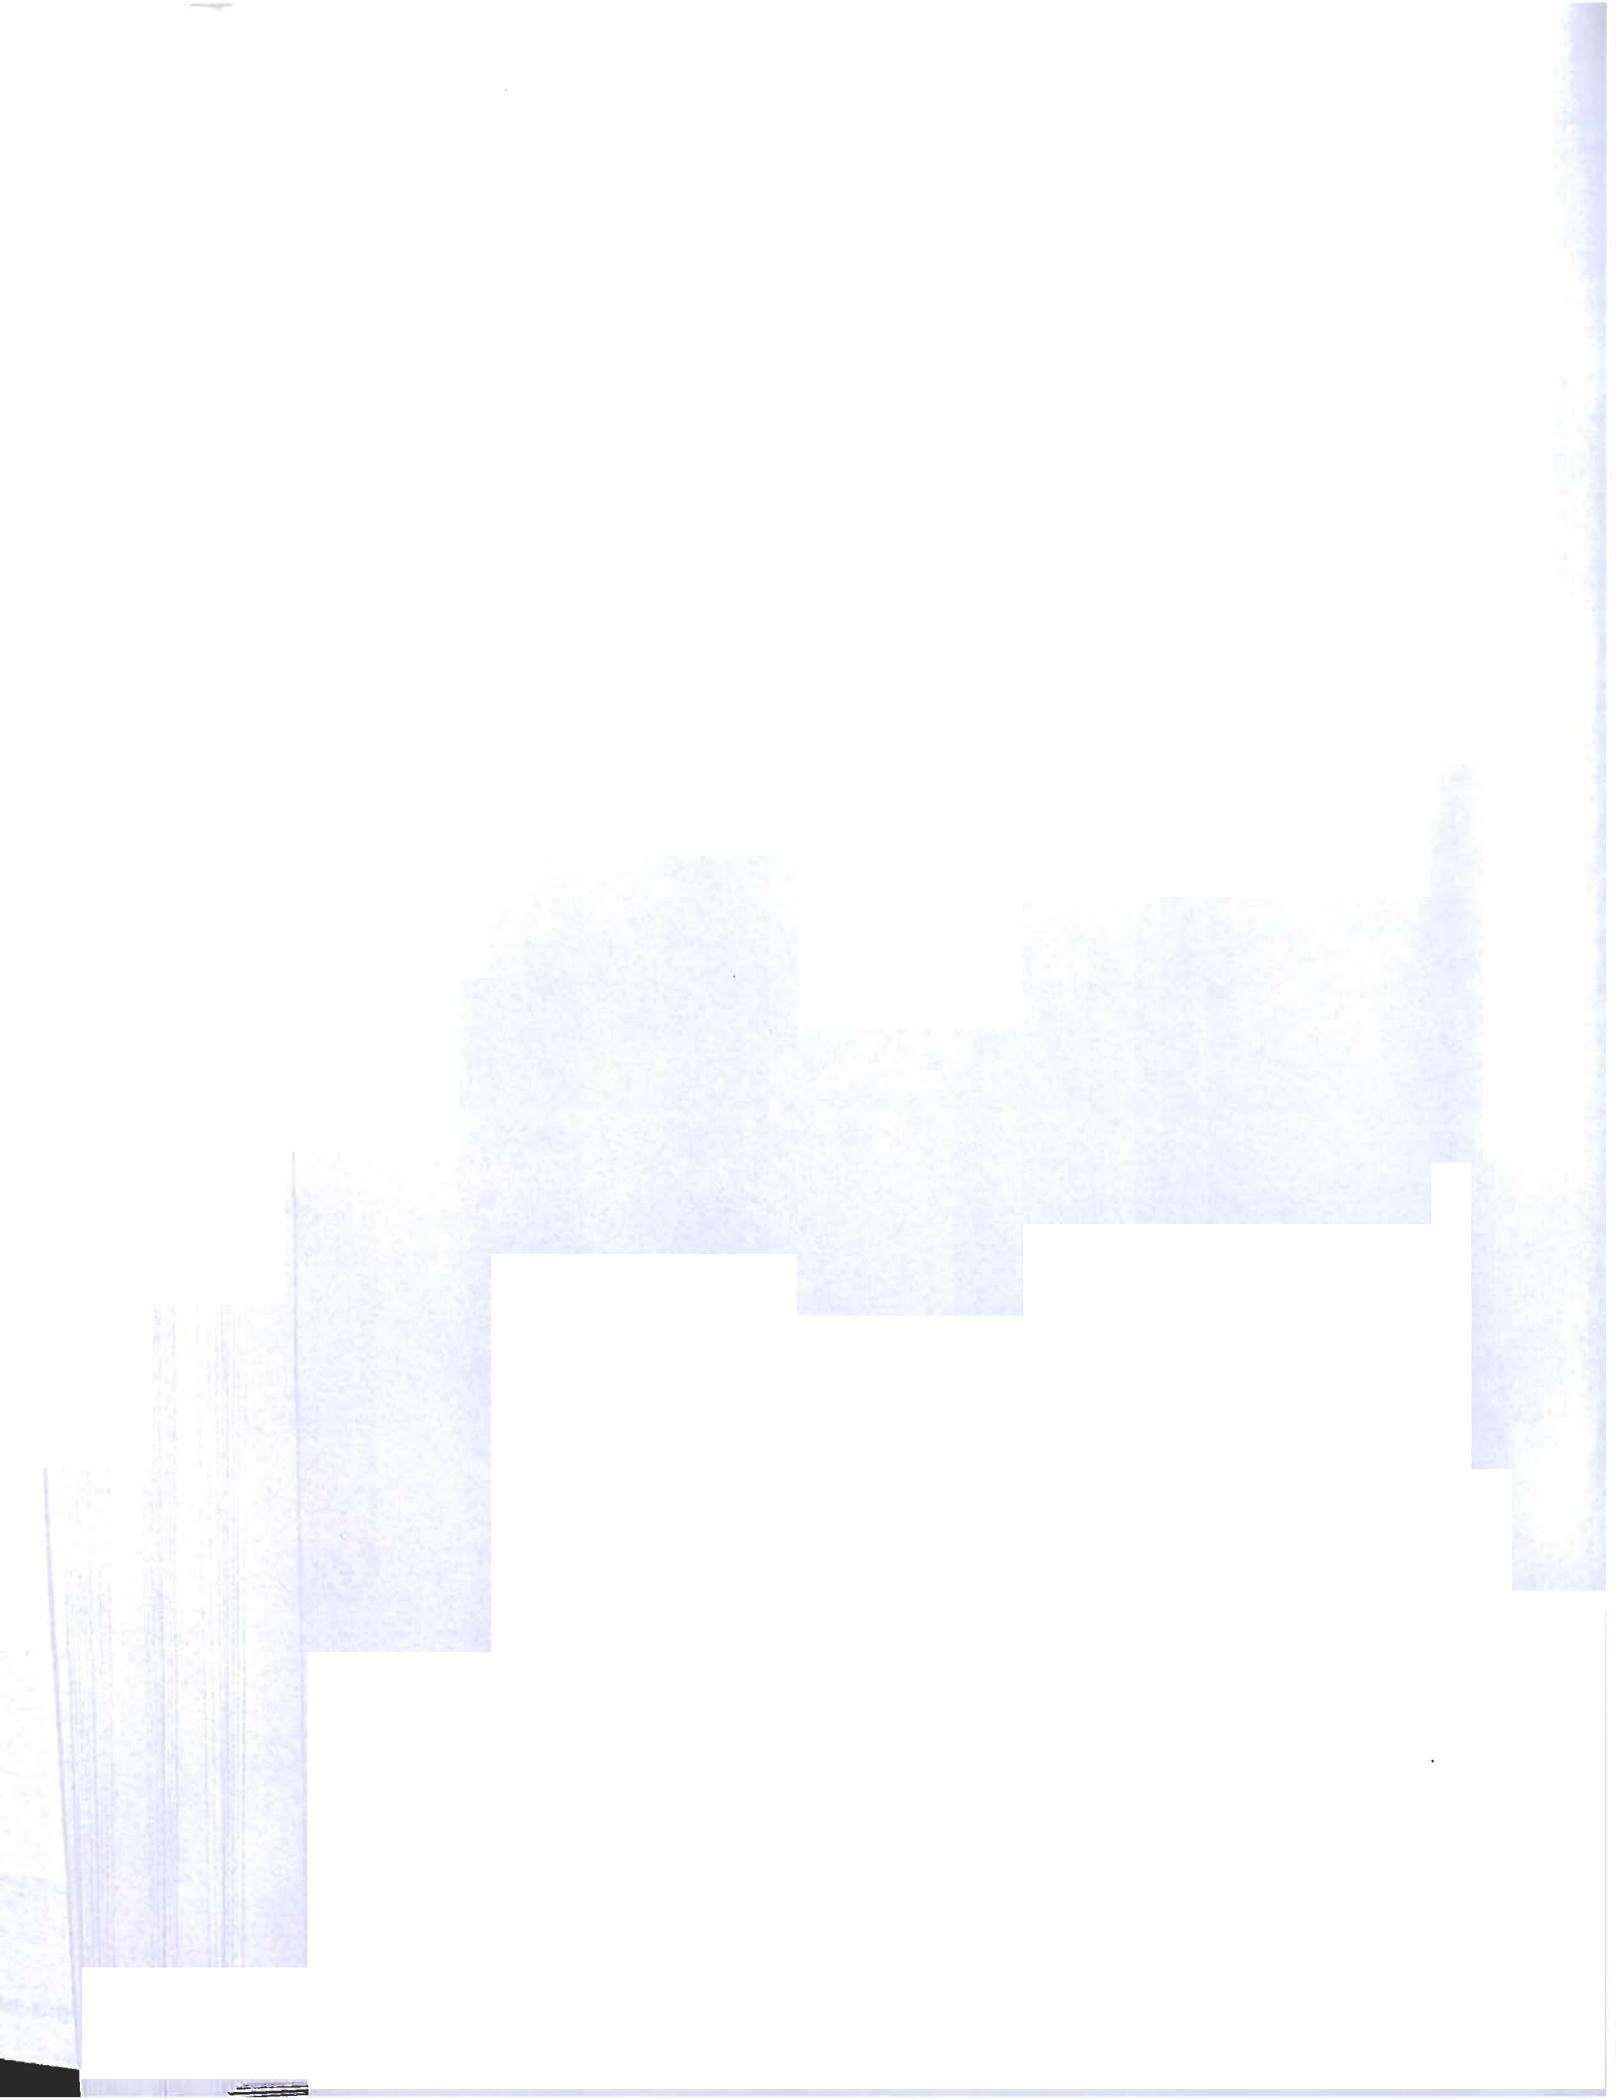

Interface 1
s will

ond drilling rig and crew in
neric Site: The Deep Bore
p borehole concept as des-
ility site are generic. The ex-

borehole would be sufficient to
Disposal

investigati
12. Facility F
water, wa
site itself.

13. Regulator
design no
appl
regu
materials, criticalit
safe
cont
mus

14

ee: If the site is a c
om water wells drilled
iter is obtained from t

and Safety Features:

al PBIS Data R

, NRC,
transport,
mergrou
ational
system

orchole
nital wo

second
aling Processes and by

ty is a new facility embe
. Both the design conce

umption is
etotically
that at thi
n perform
evaluate

e host-rock wi
logically, the
ic site, a 4 km
the Deep Bo
validity in

on 1.3.3.

r of surface
Zone at the
oly.

osal Facility
nply with all
(A) and IAEA
pecial nuclear
environmental

technologies, criticality safety, and long-term post-closure performance have not been addressed yet. As such, the facility design presented here may be modified during the design process.

Facility Design Parameters and Sensitivity to Pu-Loading

The design parameters, the capacity and size of the resulting facility, and the volumes and masses of materials that must be handled by the facility are presented and discussed here. In particular, the sensitivity of the design to the Pu-loading of the disposal form, and limitations on the Pu-loading arising from design considerations, are discussed. The Deep Borehole Disposal Facility design presented here is based on the design criteria presented above. For more complete details refer to *Wijesinghe et al. (January 15, 1996c)*.

The design given here begins by **assuming that**, for the generic site considered, a 4 km borehole provides sufficient isolation **and that the borehole is drilled to the maximum emplacement zone diameter that is possible with current drilling technology**. This yields the maximum possible emplacement zone volume for a 4 km deep borehole. This assumption should be evaluated through detailed performance assessment and systems optimization analyses in the future. The borehole completion resulting from this assumption is given in **Table 1.4-1**. Next for the assumed close packing volume fraction of ceramic pellets in the **pellet-grout mix (i.e., 60%)**, the volumes of ceramic and grout that can be emplaced in the borehole, is computed together with the required volume of isolation zone grout. From the volume of ceramic, the mass of the ceramic disposal form that can be accommodated in the emplacement zone of a single borehole is calculated. Then, the mass of Pu disposed of in a single borehole is computed for the assumed Pu-loading mass fraction. *It should be noted here that the design calls for the maximum possible packing of the ceramic pellets in the ceramic-pellet grout mix, so that no further increase in effective plutonium loading can occur through any settling of the pellets in the pellet-grout mix. Furthermore, even in the highly unlikely limiting case of the pellets crushing to a powder and segregating completely from the grout after emplacement, the maximum possible plutonium loading is the plutonium loading of the Pu-loaded pellets themselves (i.e., 1%). As can be seen from Figure 1.4-1, even at this maximum possible disruption induced plutonium loading, the design has a significant margin of criticality safety.* In **Table 1.4-2**, the mass of ceramic that is emplaced, and the volumes of rock removed by drilling, grout used in the emplacement zone ceramic pellet concrete, and the grout needed to seal the isolation zone are given for a single borehole. An important observation about this canisterless design option (and most other canistered designs) is that the volumetric emplacement efficiency of the disposal form, defined as the fraction of the emplacement zone borehole volume occupied by the disposal form, is very high and is equal to the ceramic pellet volume fraction of 60%.

Table 1.4-1 Deep Borehole Design Sizing Parameters

Design Parameters	Value	Unit
Geometric Parameters:		
Borehole dia. (2 km - 3 km)	0.914 (36)	m (in)
Borehole dia. (3 km - 4 km)	0.660 (26)	m (in)
Emplacement zone height	2,000	m
Masses & Volumes:		
Density of ceramic disposal form	4,000	kg/m ³
Volume fraction of ceramic pellets	0.60	
Empl. zone volume/borehole	1,028	m ³
Volume of grout/borehole	411	m ³
Volume of ceramic/borehole	617	m ³
Mass of ceramic/borehole	2,468	t
Empl. zone volume/borehole	1,029	m ³
Isolat. zone grout vol/borehole	1,538	m ³
Rock volume removed/borehole	3,340	m ³
Borehole drilling criterion	15.0	%
Total Pu mass to be disposed	50	t

The number of boreholes required to accommodate the 50 t of plutonium is then computed. The resulting fractional number of boreholes is rounded down if less than 15% of the disposal capacity of the last borehole is utilized; otherwise it is rounded up, and another borehole is drilled. Adjustments are then made to the calculated volume of sealants, grouts etc. to account for partial filling of the last borehole with the pellet-grout mix.

Finally, and most importantly, the criticality coefficient is calculated for each emplacement configuration and Pu-loading for a number of worst case scenarios to evaluate criticality safety. These calculations include scenarios such as complete permeation of all void volumes in the borehole with brine bearing dissolved plutonium at the solubility limit at typical temperature and pH conditions. It was found that the dissolved plutonium contained in brine was far too small to have any effect on criticality.

The effect of Pu-loading mass fraction on the number of boreholes and the ceramic, grout and rock volumes and masses that must be handled are given in Table 1.4-2. The calculated criticality coefficients for the ceramic pellet-grout-brine mix for a variety of plutonium loadings with and without gadolinium as a neutron absorber, is given in Table 1.4-1 and in Figure 1.4-1. The corresponding results for ceramic pellet-brine mix only is given in Figure 1.4-2; this represents a limiting condition when the grout has completely degraded and been leached out. It can be seen from these results that there is a large margin of safety in the design case of 0.5% effective Pu-loading of the ceramic pellets, corresponding to a mixture of equal volumes of 1% Pu-loaded pellets and non-Pu-loaded pellets. At this loading, the design is criticality safe and requires only 4 boreholes. The mass of ceramic pellets can be reduced ten-fold, and the number of

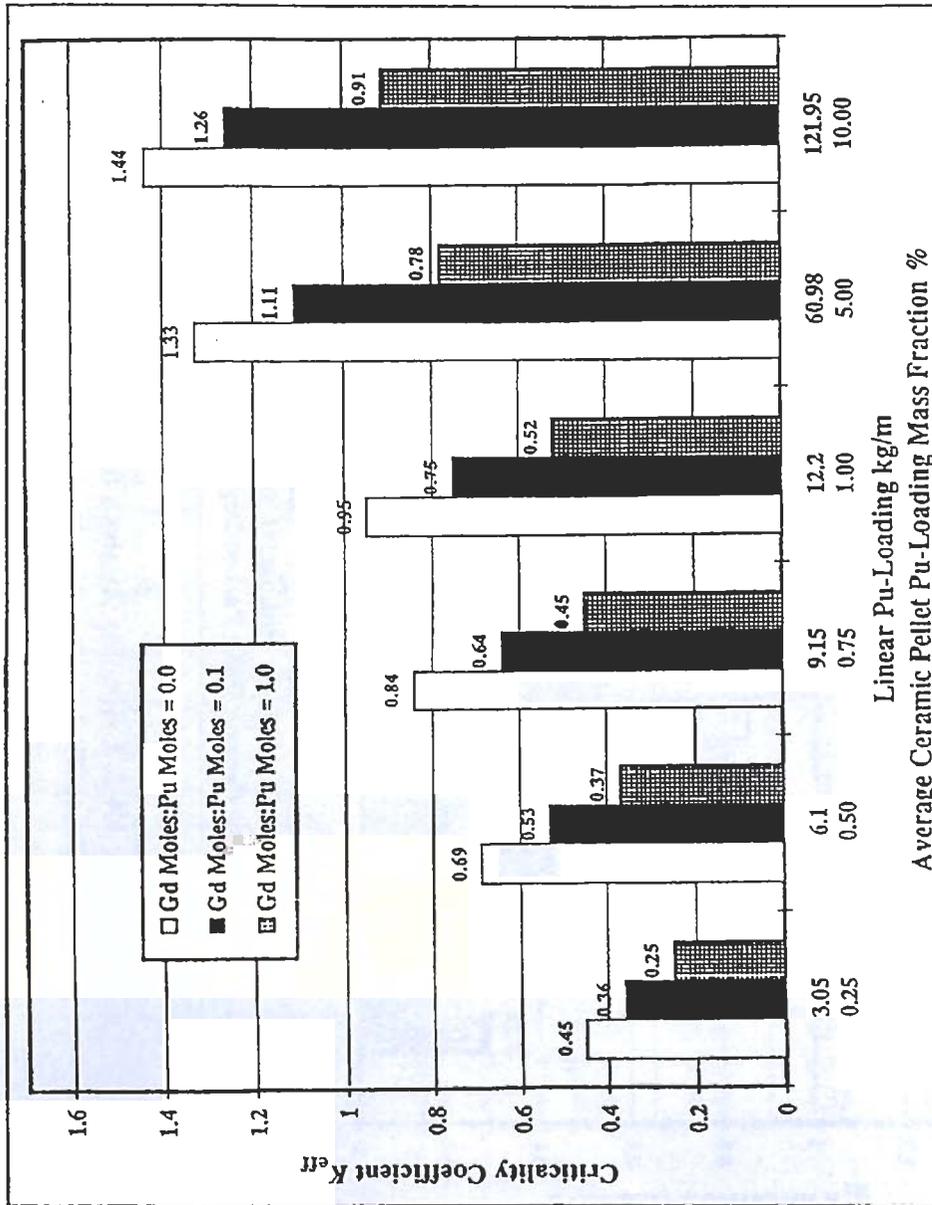


Figure 1.4-1: Criticality Analysis for Ceramic Pellet-Grout-Brine Mixture Emplaced in the Borehole

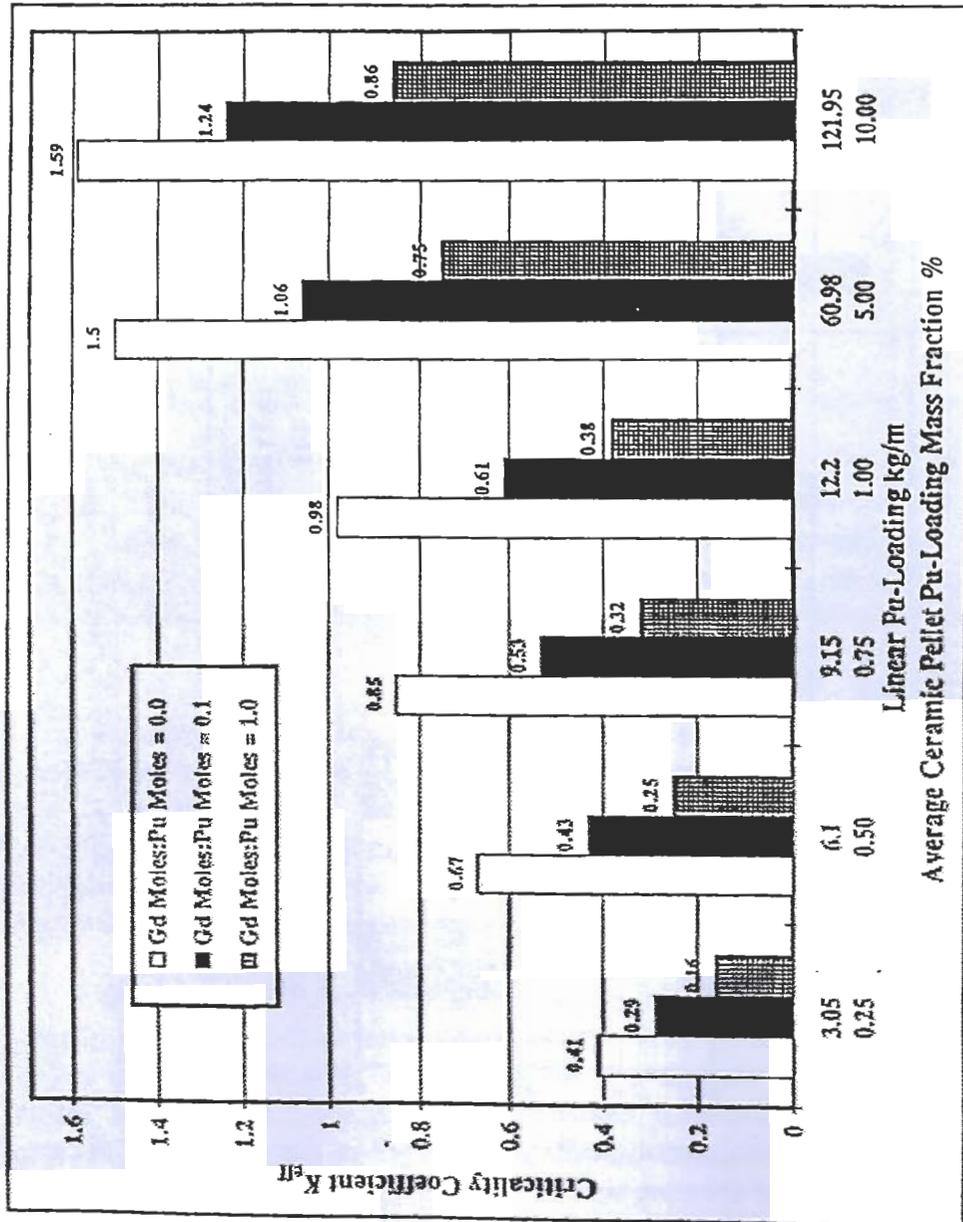


Figure 1.4-2: Criticality Analysis for Ceramic Pellet-Brine Mixture Employed in the Borehole

boreholes to just one, by increasing the Pu-loading of the ceramic-pellets to 5% and incorporating neutron poisons to maintain criticality safety. However, it is likely that, upon leaching of the plutonium and the neutron poisons by brine, they would be transported away at different speeds and their concentration fronts would become separated in space. Under these conditions, the addition of neutron poisons may not be able to ensure criticality safety. Therefore, we prefer the more conservative approach of depending on spatial dispersal at the lower Pu-loading for criticality safety and employing neutron poisons only for an additional measure of safety. This implies that we must accept the cost of a ten-fold increase in the mass of ceramic pellets.

From this discussion, and the results given in Table 1.4-2, it becomes clear that 50 MT of plutonium can be emplaced in very few boreholes by increasing the plutonium loading, but that criticality safety is likely to restrict the plutonium loading to much lower levels than is possible from disposal form manufacturing considerations alone. The impact of lower Pu-loading would be to increase the total mass of ceramic pellet feed required by the Deep Borehole Disposal Facility. This in turn would increase the output capacity and size of the ceramic Immobilization Facility and the ceramic Transportation requirements. A parametric study of these design assumptions (Pu-loading in particular) will be performed in the future from a systems standpoint to optimize the Deep Borehole Disposition Option from beginning-to-end. This would include the Deep Borehole Disposal Facility and its external interfaces such as Immobilization and Transportation.

Table 1.4-2 Impact of Plutonium Loading on Deep Borehole Design

Pu Mass Fraction %¹	0.25	0.50²	0.75	1.00	5.00	10.00
Mass of Pu/borehole t	6.17	12.34	18.51	24.68	123.41	246.82
# Boreholes (Exact)	8.10	4.05	2.70	2.03	0.41	0.20
# Boreholes (Rounded)	8	4	3	2	1	1
Actual Pu disposal capacity t	49.36	49.36	55.53	49.36	123.41	246.82
Total ceramic mass t	19,745	9,873	6,667	4,936	1,000	500
Total empl. zone seal grout m ³	0	0	235	0.0	468	627
Total isolation zone grout m ³	12,307	6,154	4,615	3,077	1,538	1,538
Total empl.+isolat. grout m ³	12,307	6,154	4,850	3,077	2,006	2,165
Total rock removed m ³	26,714	13,357	10,018	6,679	3,340	3,340
Criticality Coeff. ³ Gd:Pu = 0.0	0.45	0.69	0.84	0.95	1.33	1.44
Criticality Coeff. ³ Gd:Pu = 0.1	0.36	0.53	0.64	0.75	1.11	1.26
Criticality Coeff. ³ Gd:Pu = 1.0	0.25	0.37	0.45	0.52	0.78	0.91

¹ Effective Pu mass fraction in ceramic disposal form.

² Effective Pu mass fraction used in the design.

³ For Ceramic-Pellet-Grout-Brine Mixture in Borehole, for added Gd moles to Pu moles

1.4.1 Facility Description

The Deep Borehole Disposal Facility consists of a Surface Processing Facility for receiving, inspecting, and storing the feed ceramic disposal form in transportation shipping containers until the pellets are required for emplacement; a drilling facility for drilling the borehole and casing and sealing hydraulically conductive features in the host rock; an Emplacing-Borehole Sealing Facility for preparing the coated ceramic pellet-grout mix, emplacing it within the borehole, sealing it in place, and sealing the borehole; and a Waste Management Facility for treating the wastes generated by the borehole disposal operations. These functional elements of the envisaged Deep Borehole Facility are shown in Figure 1.4.1-1. In addition, there is a Support Facility consisting of Administration, Plant Operations and Balance-of-Plant facilities. Descriptions of significant facility components are provided in Table 1.4.1-1.

The Borehole Array Area of the Deep Borehole Disposal Facility consists of the relocatable drilling facility, the resulting 4 km deep boreholes, and a separate relocatable Emplacing-Borehole Sealing Facility. Figure 1.4.1-2 shows a general plot plan for the Deep Borehole Disposal Facility.

The Site Plan of the Deep Borehole Disposal Facility given in Figure 1.4.1-3 details the layout of the facility in both the Main Facility and Borehole Array Areas. It also shows the access routes for off-site transportation, and the two on-site transportation routes for trucks bearing SFM. Figure 1.4.2-3 shows the Security Boundaries and Buffer Zone surrounding the Facility and delineates the four boreholes required by this design.

The Deep Borehole Disposal Facility will be designed with site-specific design criteria to comply with DOE orders and applicable NRC regulations covering the design, construction, and safety of non-nuclear reactor plutonium facilities. The facility will incorporate the safety, security and environmental protection considerations as required by DOE orders and applicable NRC and EPA regulations. The facilities will be designed for earthquake, fire, wind and flood safety. In addition, the entire facility will be designed to include the basic controls for assuring nuclear criticality safety.

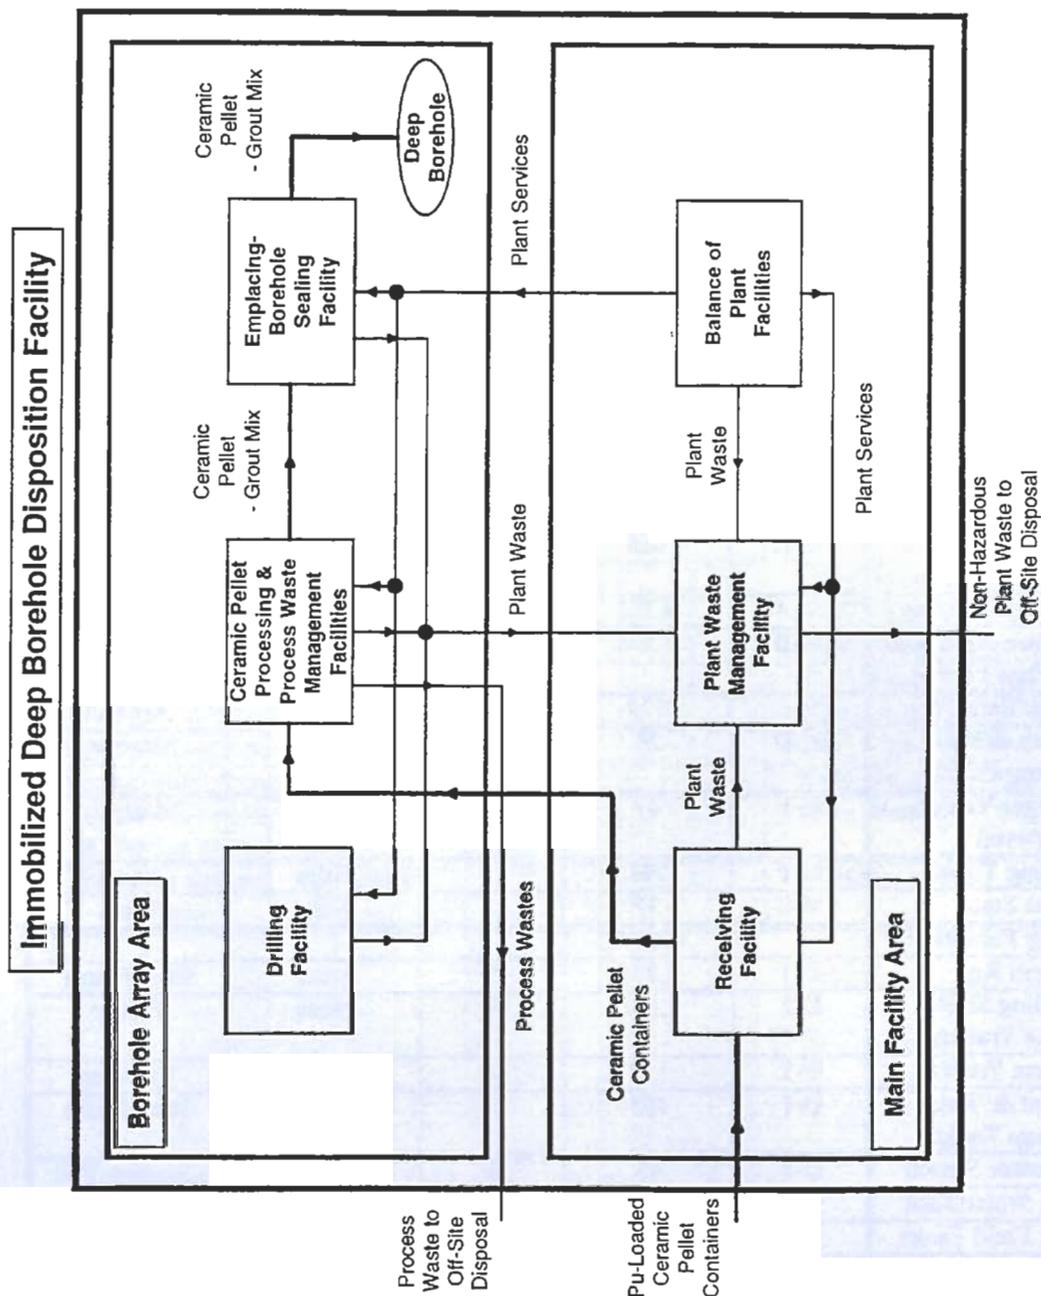


Figure 1.4.1-1: First-Level Deep Borehole Disposal Facility Process Flow Diagram

Table 1.4.1-1: Deep Borehole Disposal Facility Data

Building Name	Building Code	Footprint (m ²)	Number of Levels	Special SNM Materials	Construction Type
Main Area Facilities:					
Administration	M-1	1,394	1	None	Light Steel Frame
Personnel Services	M-2	1,394	1	None	Light Steel Frame
Medical Center	M-3	929	1	None	Light Steel
ES&H	M-4	929	1	None	Light Steel
Security Center	M-5	1,858	1	None	Light Steel
Security & Fire Training Area	M-6	929	1	None	Open Area
Fire Station	M-7	929	1	None	Light Steel
Warehouse & Maintenance	M-8	2,323	1	None	Light Steel Frame
Receiving and Storage	M-9	4,181	2	SNM	Concrete
Plant Utilities	M-10	929	1	None	Masonry
Plant Waste Management	M-11	650	1	None	Light Steel Frame
Drilling & Emplacing Operations Center	M-12	929	1	None	Light Steel Frame
Electrical Substation (2 MW)	M-13	650	1	None	Concrete Pad
Employee Parking	M-A	2,323	1	None	Asphalt
Laydown Area & Storage Yard	M-B	5,574	1	None	Open Area
Truck Parking	M-C	929		None	Asphalt
Truck & Rail Security Portals	M-D	28	1	None	Masonry
Passenger Vehicle Portal	M-E	47	1	None	Masonry
Cooling Tower	M-F	743		None	Steel
Gas Stack	M-G	37		None	Steel
Drilling Facilities:		46,450			
Drill Rig	D-1	1,858	1	None	Steel Frame
Drilling Shift Office Trailers	D-2	1,858	1	None	Trailer
Cement Trucks	D-3	139	1	None	Vehicles
Cement & Water Storage Tanks	D-4	465	1	None	Steel Tanks
Compressor Station	D-5	47	1	None	Concrete Pad
Potable Water Tank	D-6	47	1	None	Stainless Steel
Drilling Fluid Tanks	D-7	465	1	None	Steel
Treated Water Storage	D-8	3,716	1	None	Steel, Concrete
Generator Truck	D-9	70	1	None	Vehicle
Drilling & Emplacing Storage Yard	D-A	929	1	None	Concrete

Table 1.4.1-1: Deep Borehole Disposal Facility Data (Continued)

Building Name	Building Code	Footprint m ²	Number of Levels	Special SNM Materials	Construction Type
Drilling Wastewater Treatment	D-B	186	1	None	Steel Frame
Drilling Mud Pits	D-C	7,342	1	None	Earth
Mud & Water Pumps	D-D	47	1	None	Concrete Pads
Pipe Storage	D-E	186	1	None	Packed Earth
Emplacing Facilities:		46,450			
Emplacing Crane	E-1	1,858	1	None	Steel Frame
Pellet-Grout Mixing Facility	E-2	743	1	SNM	Concrete
Process Waste Management	E-3	1,742	1	SNM Waste	Concrete
Radiation Monitoring	E-4	93	1	None	Light Steel Frame
Containment Structure	E-5	279	1	SNM Waste	Light Steel Frame
Emplacing Sub-Base	E-6	186	1	SNM Waste	Steel Frame
Emplacing Shift Office Trailers	E-7	1,858	1	None	Light Steel Frame
Storage Tanks	E-8	186	1	SNM Waste	Steel
Compressor Station	E-9	47	1	SNM Waste	Concrete Pad
Generator Truck	E-10	70	1	SNM Waste	Earth
Cement Trucks	E-11	139	1	SNM Waste	Earth
Potable Water Tank	E-12	47	1	SNM Waste	Steel
Pipe Handling Crane	E-13	139	1	SNM Waste	Packed Earth
Process Water Storage	E-14	93	1	SNM Waste	Steel Tank
Waste Monitoring & Testing Station	E-15	47	1	SNM Waste	Light Steel Frame
Entrance Security Portal	E-16	19	1	None	Masonry

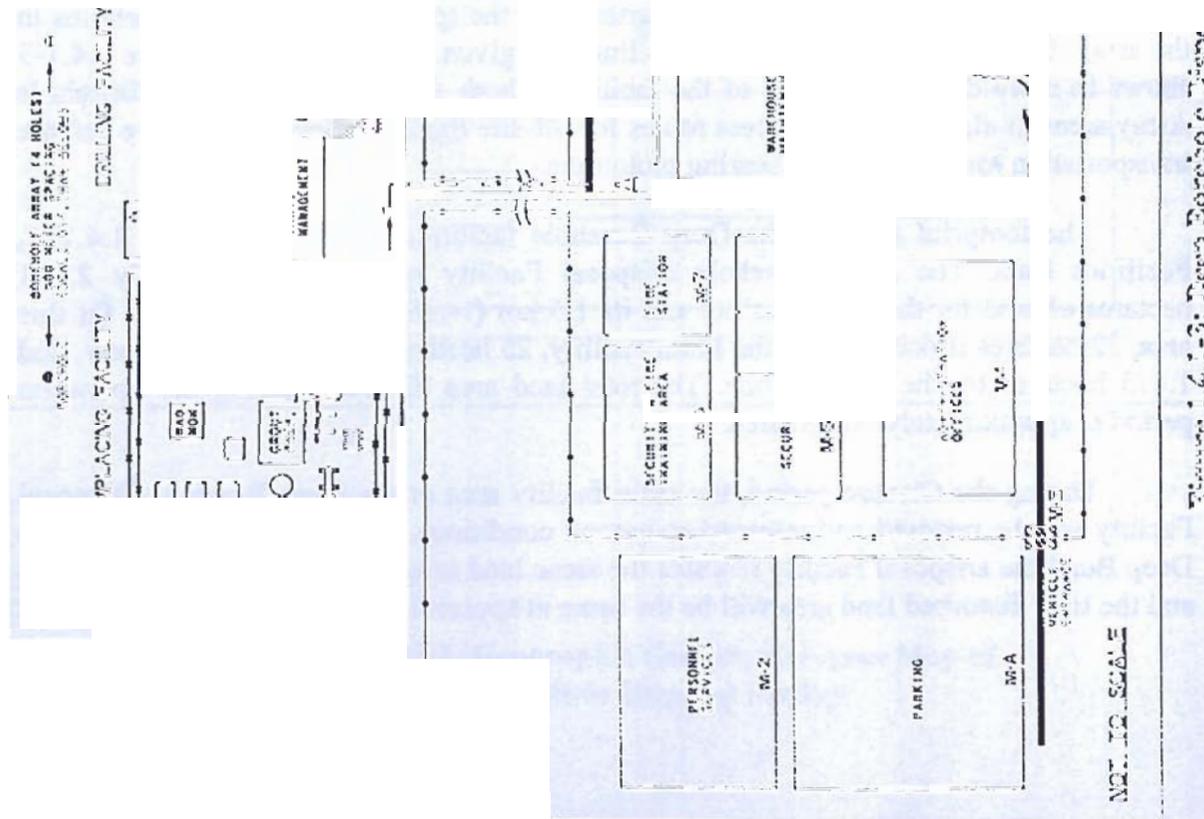


Figure 1.4.1-3: Deep Borehole Drilling Facility

Total
e. The
a, the
L and
process
e and
reable
k site,
and and
with a

Figure 1.4.2.3


ms
in
3
de
le

Table 1.4.1-1
imately 2,041
Zone. Of this
ole Array, and
the operation

The footprint areas of
s Data. The Deep I
of land for the entire
hectares is occupied by
hectares by the Buffer
approximately 56 he-

losure period, 1
red and return

area will

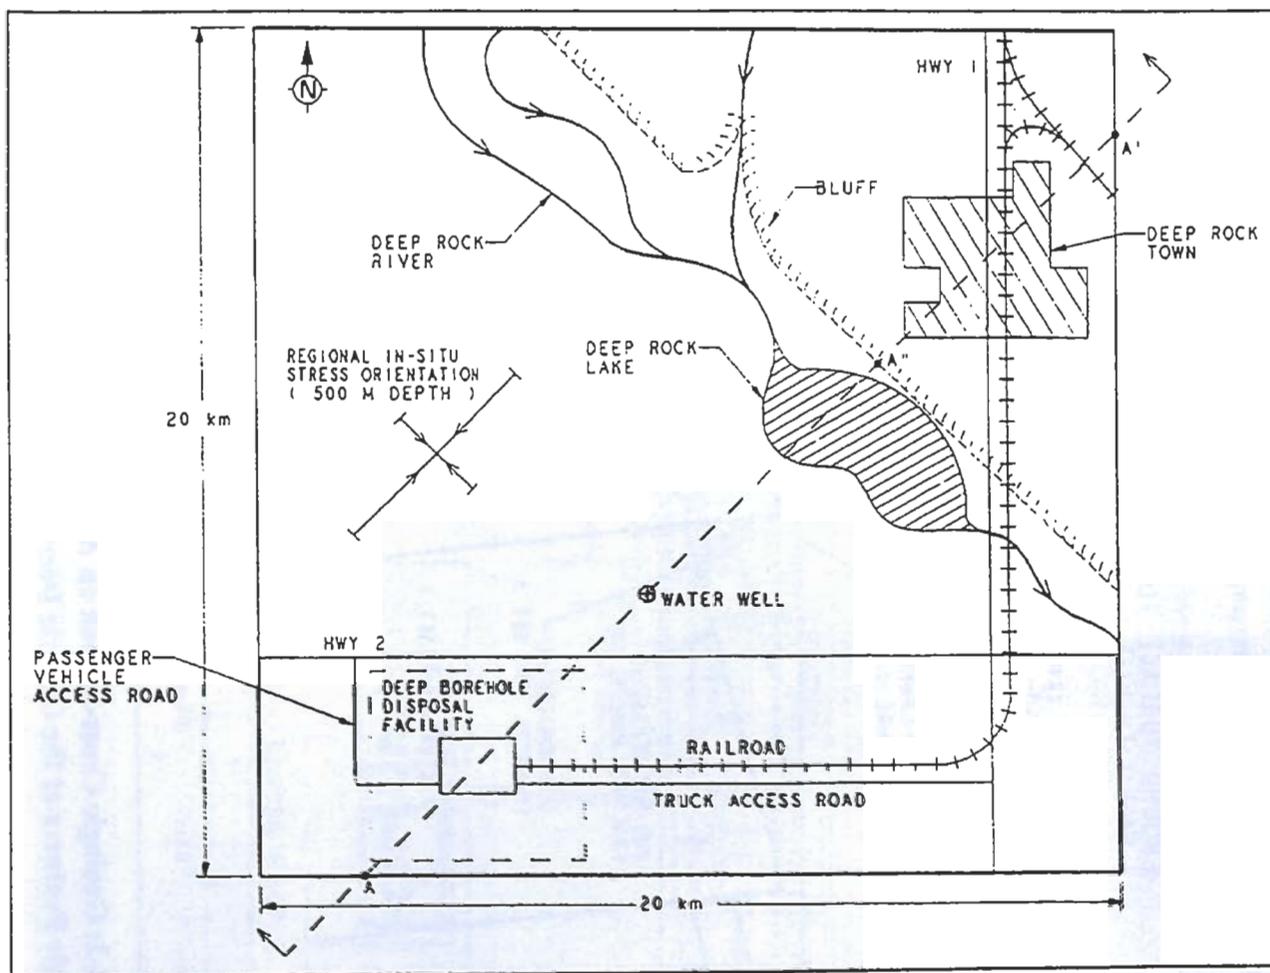

**Figure 1.4.2-1: Geographic Generic Site Area Map of
Deep Borehole Disposal Facility**

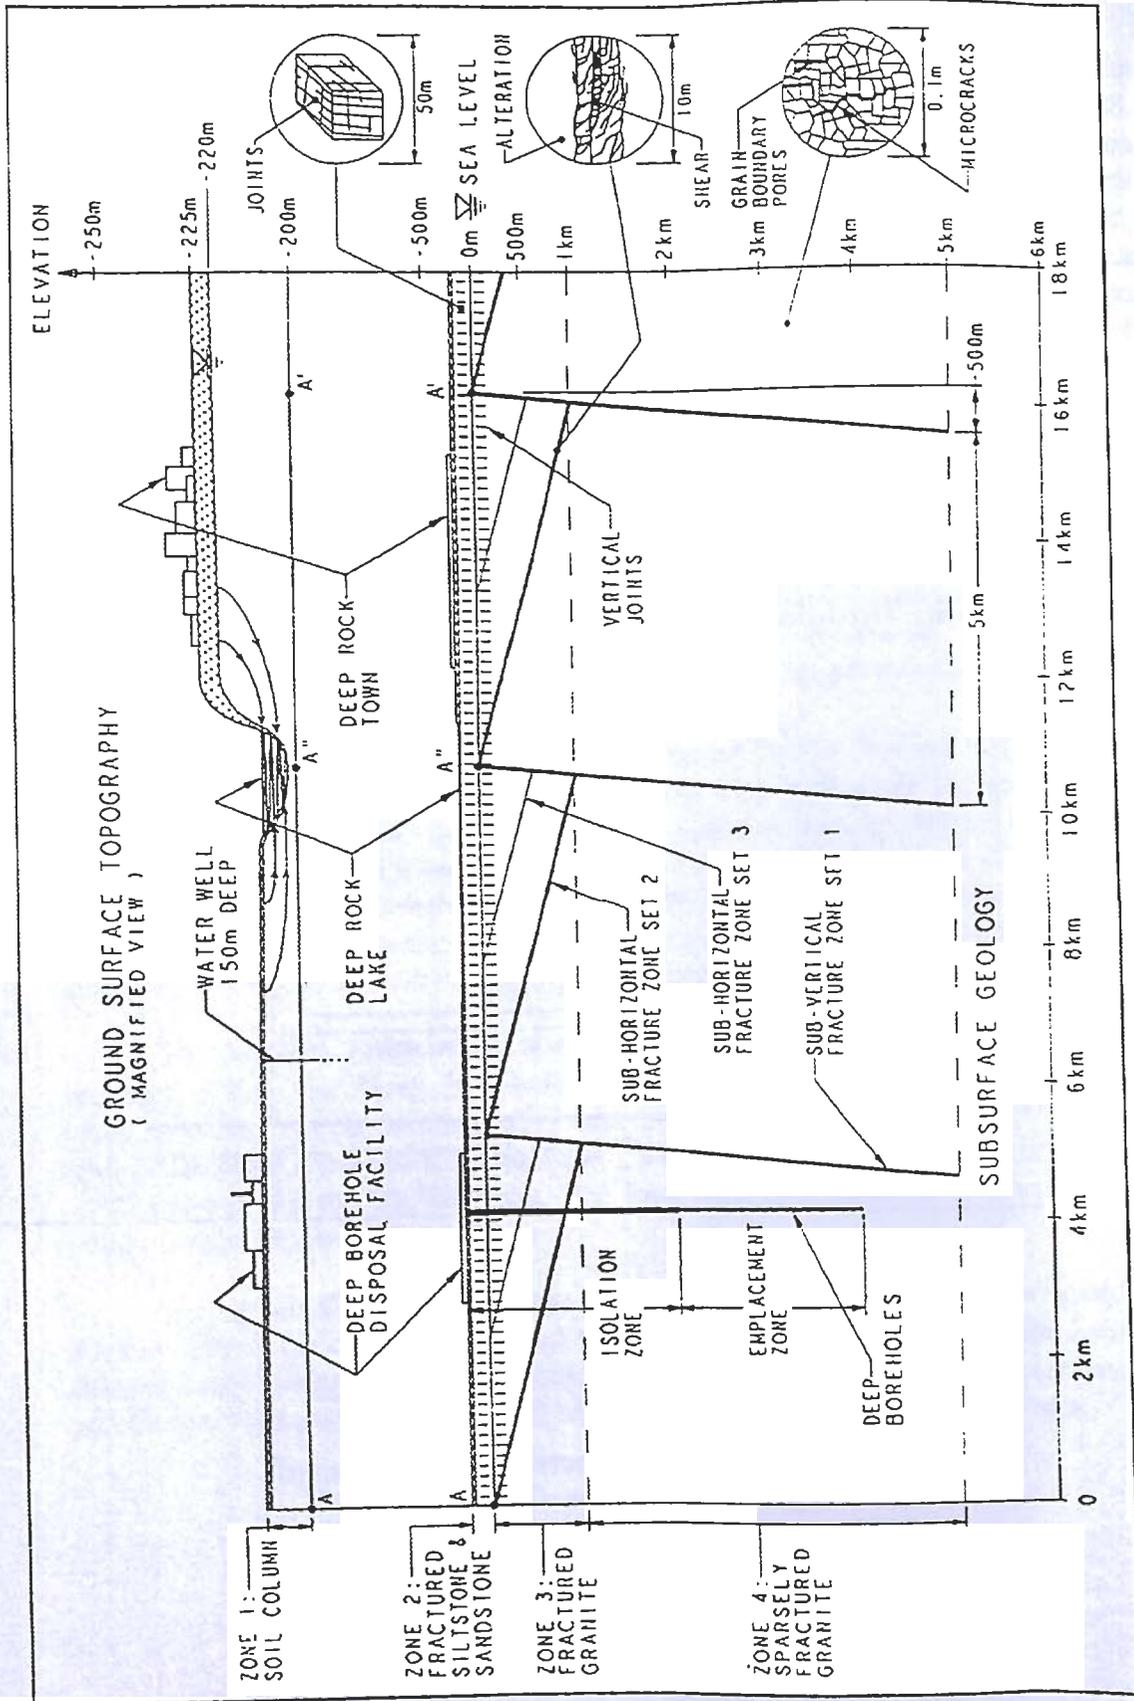


Figure 1.4.2-2: Geologic Cross-Section on A-A' (in Figure 1.4.2-1) showing
Geologic Features at the Generic Deep Borehole Disposal Facility Site

During the Post-Closure period the Borehole Array area of 25 hectares will be declared a limited access area indefinitely, and a 1.6 km (1-mile) Buffer Zone of 1,358 hectares may also be declared off-limits. Thus, the Borehole Array area will require approximately 1,383 hectares to be declared off-limits. The total disturbed land area during the Post-Closure period will be the approximately 0.1 hectares (0.25 acres) occupied by the 15.2 m x 15.2 m (50 ft x 50 ft) concrete security and anti-water infiltration caps installed above the 4 boreholes.

During the Construction Period, the Deep Borehole Disposal Facility requires approximately 4 hectares of land for construction laydown and warehousing and 2 hectares for construction parking.

A minimum of one mile two-lane paved road and railroad spur track will have to be constructed to the Deep Borehole Disposal Facility site for workers transportation and material and equipment delivery. The length of the road connections depends on the specific site.

1.4.3 Facility Operation

The Deep Borehole Disposal Facility accepts plutonium immobilized in ceramic coated ceramic pellets. The immobilized disposal form is placed in deep competent rock with ancient, nearly dormant brine. The plutonium is received, inspected, and stored at the surface processing facility pending transportation on-site to the emplacement facility where it will be mixed with grout. Deep boreholes are drilled in a stepwise decreasing-diameter manner to a depth of about 4 kilometers and cased from the surface to about 2 kilometers. An emplacement and sealing facility is located near the boreholes to prepare the ceramic pellet-grout mix and emplace it at depth in the boreholes. It is sealed in place to minimize brine intrusion and to prevent criticality.

The facility will operate 5 days/week, 8 hours/day, 250 days/year for the Surface Processing and Emplacement-Borehole Sealing Processes. The Drilling Process will operate 7 days/week, 24-hours/day in two 12-hour shifts with three crews working 4 days on and 3 days off in rotation. The surge rate will be handled by introducing a second 8-hour shift in the Surface Processing and Emplacing-Borehole Sealing Processes and adding a second drilling rig and crew, if needed, in the Drilling Process.

All processing operations, except initial inspection, are performed in relocatable buildings at the Emplacing-Borehole Sealing Facility. The pellets arrive coated with a durable non-Pu bearing ceramic material to limit radioactive contamination from broken or damaged pellets. The plutonium loading level of the ceramic pellets, inspection and storage at the Main Facility, and the emplacing operations at the Borehole Array are designed to prevent criticality during these operations.

The process flow diagram for the Surface Processing Facility is shown in Figure 1.4.3-1 together with its waste flow diagram. The Surface Processing Facility receives,

stores and ships approximately 500 t/year of Pu-loaded ceramic to the Emplacement Facility. During surge operation at 10 t/year of plutonium, this rate will double to 1,000 t/year of Pu-loaded ceramic pellets.

At the emplacement facility, the coated Pu-loaded ceramic pellets are removed from the transportation containers and diluted with an equal volume of uncoated non-Pu-loaded filler ceramic pellets. Cementing trucks mix and deliver the grout slurry to the ceramic pellet-grout mix preparation building. The ceramic pellet mixture is then metered into the grout to produce a ceramic pellet-grout feed material with 30% by volume Pu-loaded ceramic pellets, 30% filler ceramic pellets and 40% grout for emplacement in the borehole. The filler ceramic pellets are inexpensive uncoated commercial grade pellets of the same ceramic chemical composition as the Pu-loaded ceramic pellets produced by the immobilization facility. This procedure produces the desired Pu-load of 0.5% by mass. In this way, an additional measure of criticality safety is achieved while halving the volume and the cost of the Pu-loaded ceramic pellets.

The pellet-grout mix is emplaced by one of two methods: delivery by a bucket lowered into the borehole or by pumping down a delivery pipe which is inserted into the borehole. In the bucket delivery method, the pellet-grout mix is pumped into a 152 m (500 ft.) long pipe bucket and the bucket is lowered into the borehole and the mix is slowly released from the bucket. The ceramic pellet-grout mix is driven out under gas pressure applied to a wiper piston within the bucket and exits through a remotely controlled release valve at the bottom of the bucket. Each bucket-load would weigh about 113,000 kg (250,000 lbs.) and would take 8 hours to lower down to emplacement depth. A total of 30 bucket-loads would be required to emplace 12.5 t in each borehole. In the delivery pipe pumpdown method, batches of ceramic pellet-grout mix are pumped down a 0.152 m (6 in.) diameter delivery pipe under water and/or air pressure. The batch of slurry will be in the form of a slug of finite length pushed from behind by a piston-like ceramic wiper piston at its trailing edge and prevented from breaking-up at its leading edge by a similar ceramic wiper piston. The ceramic wipers are ejected into the borehole and are emplaced with the pellet-grout mix. The current design calls for a ceramic pellet-grout mix slug volume of 8.46 m³ and a slug length of 464 m within the 0.152 m (6 in.) delivery pipe. A total of 125 slugs would be required to emplace 12.5 t in each borehole. To isolate emissions and contamination, the system is equipped with two sets of inflatable packers and a containment structure on top of the entrance to the borehole at the surface. Additional information on emplacement procedures and equipment can be found in *Wijesinghe et al. (January 15, 1996c)*.

Drilling operations involve the preparation of the drilling mud with appropriate additives, maintaining the mud column at the proper density, pumping water out when needed to control water inflow from conductive aquifers and fractures, using mud additives and plugging back these features to control the inflows, and installing steel casing and cementing behind the casings as the drilling progresses. The borehole will be drilled using technology that has been used extensively in the petroleum industry. The drilling system consists of a drill rig (or derrick) which is used to lower and raise the drill

pipe and the drill bit in the borehole, and the associated drilling mud and fluids handling support facilities. Very large quantities of materials such as drilling muds, grouts, casing, and chemical additives will be required for operating the Drilling Facilities. The drilling process requires the circulating water and drilling muds to be periodically replaced by fresh mud, water and chemicals which include polymers, soaps, and pH control additives. The estimated time required to drill one borehole is from 10 to 11 months.

1.4.4 Waste Management

A Process Waste Management Facility is provided in the Main Facility Area for treating the Process Rad-Wastes and Process Wastewater in the Borehole Array Area. These wastes are generated by the borehole disposal operations. In addition, a Plant Waste Management Facility is provided in the Main Facility Area to handle Utility and Sanitary Wastes.

1.4.5 Intrasite Transportation

Currently, the transportation of radioactive material on-site at a DOE facility is not covered by Federal Regulations. Regulations will be developed for the transportation of plutonium in the form of ceramic-coated ceramic pellets loaded with plutonium. The transportation of plutonium in waste materials is controlled by DOE-EH.

The transportation of immobilized plutonium feed material and the plutonium in its final disposal form on-site does not represent a significant potential impact to the offsite environment because the disposal form will arrive onsite in hermetically sealed transportation packages with double containment. After undergoing MC&A processing and being hermetically resealed in the same packages they will be stored in the receiving and storage building of the Surface Processing Facility. They are moved on-site as needed from the storage building to the Emplacing-Borehole Sealing Facility in the same containers. The transportation routes used and procedures that are adopted to mitigate accident related potential impacts are addressed below.

Feed Form Transportation to the Surface Processing Facility

In this Deep Borehole Disposal Facility design, the feed material is in the form of Pu-loaded ceramic-coated spherical ceramic pellets, 2.54 cm (1 in.) in average diameter, which are fabricated as described in Section 1.3. At a plutonium loading of 1% by weight and 5 t/year plutonium disposal rate, this represents 500 t/year of Pu-loaded ceramic pellets arriving at the Surface Processing Facility to be received and stored. This Pu-loaded ceramic feed material will be delivered to the Surface Processing Facility in DOE-approved SSTs in 208-liter (55-gal) metal drum transportation packages with double containment. No special safety or security requirements beyond those applied to off-site inter-facility transportation are required for on-site transit of these trucks from

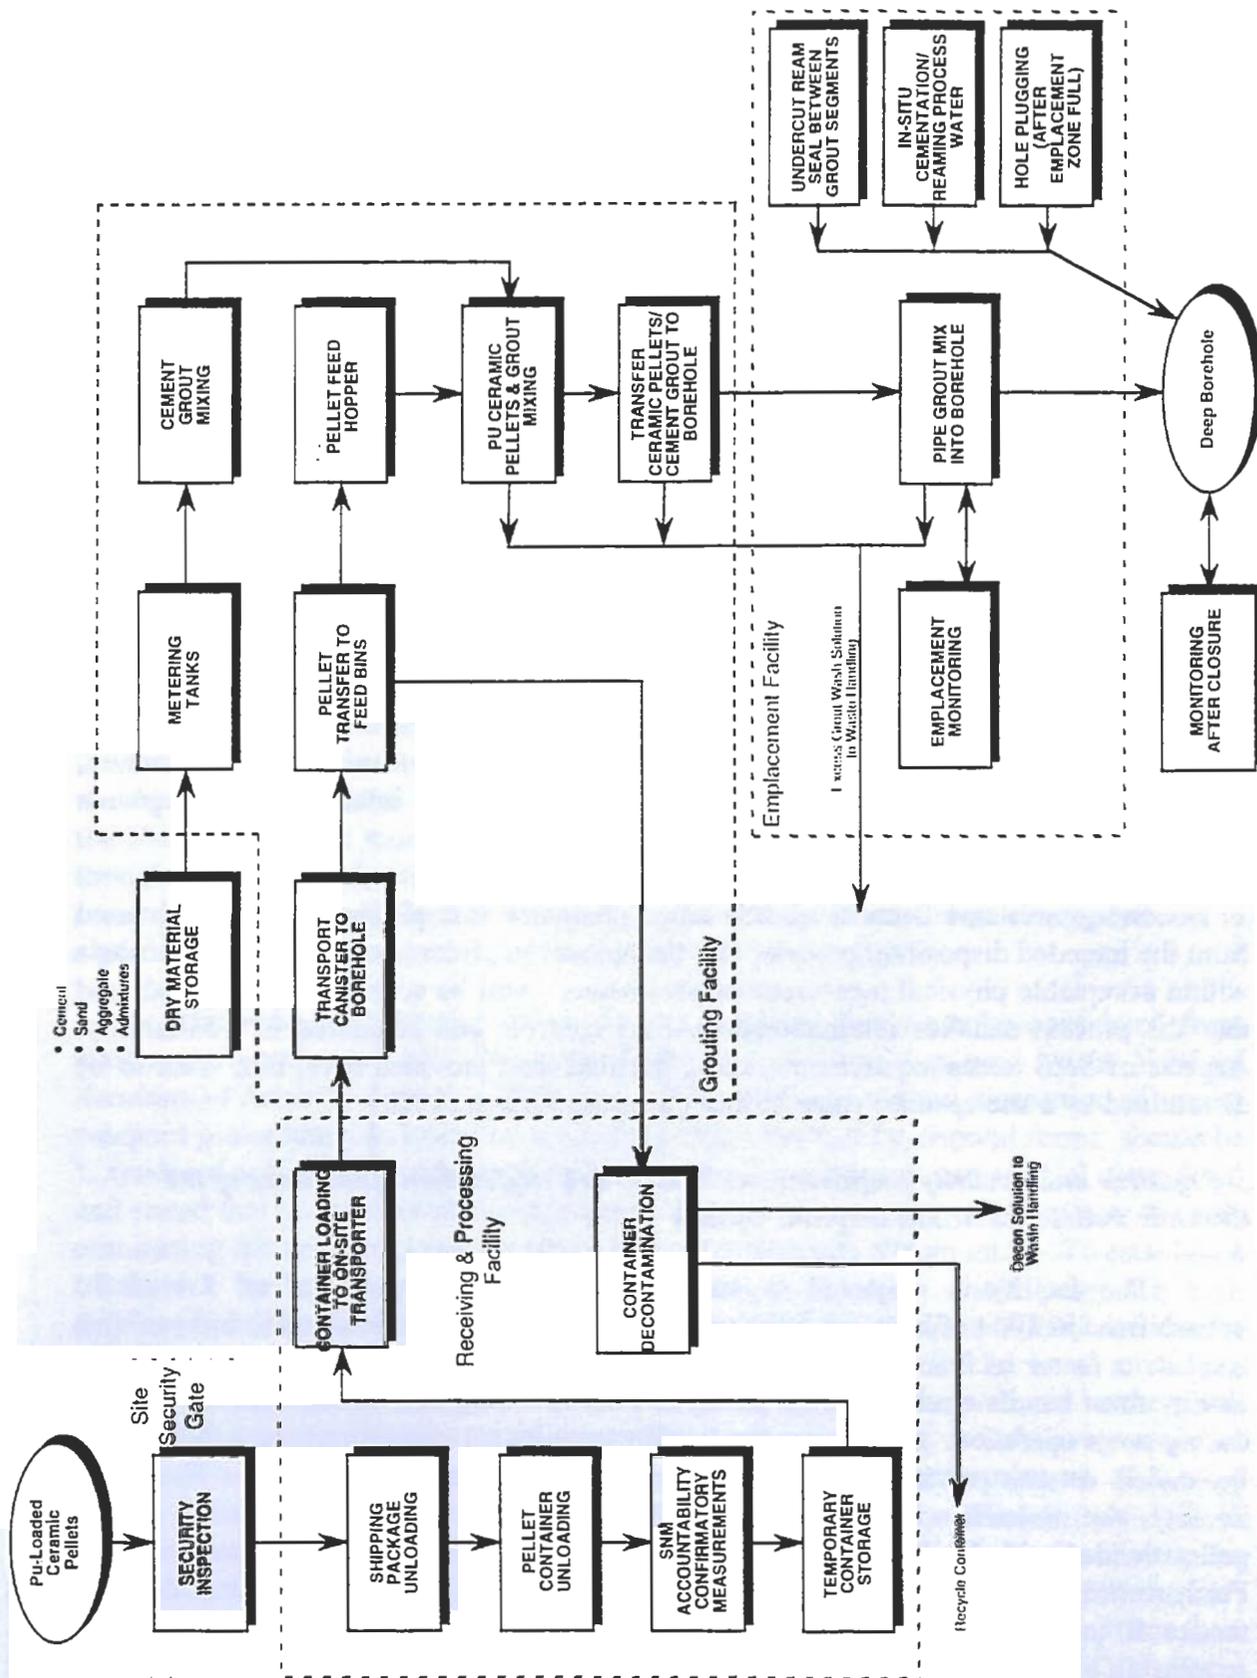


Figure 1.4.3-1: Deep Borehole Disposal Facility
Plutonium Process Flow Diagram

the site entrance to the Surface Processing Facility along the route identified as Plutonium Transportation Route 1 in the On-Site Transportation Map.

Disposal Form Transportation to Emplacing-Borehole Sealing Facility

The Pu-loaded coated ceramic pellets that arrive at the Surface Processing Facility in 208-liter (55-gal) metal transportation containers, will be inspected and stored in the same packages. These transportation packages will be transported by truck to the Emplacing-Borehole Sealing Facility along the route identified as SFM Transportation Route 2 in the Site Plan and Transportation Route Map (Figure 1.4.1-3). DOE-approved intra-facility transportation trucks, equipped with special container handling fixtures will be used. These enclosed trucks will conform to site environmental, Materials Control and Accountability (MC&A), and Safeguards and Security (S&S) requirements.

1.4.6 Safeguards and Security

The domestic safeguards and security program is designed to ensure that fissile materials, which are converted into long-term disposition forms, meet security objectives. The vulnerabilities, designs, technologies, and operations associated with Safeguards and Security are interrelated in many areas relative to physical protection, nuclear materials control and accountability (MC&A), and international safeguards containment and surveillance (C/S).

Safeguards and Security (S&S) helps guarantee that plutonium is not diverted from the intended disposition process, that the amount of plutonium delivered to the site - within acceptable physical measurement parameters - will be accountably disposed, and that the process satisfies international (IAEA) controls and standards of verifiability. Aspects of S&S needs/requirements, more detailed than provided here, may need to be determined by a site-specific vulnerability threat assessment (VA).

Safeguards and Security Requirements Related to Proliferation Resistance of the Ceramic Pellet Plutonium Disposal Option

The facility is projected to sustain a disposal rate per year of 5 t of Pu immobilized in 500 t of inert ceramic material. Surge rates are anticipated to increase this level by a factor of 2 to 10 t of Pu per year in 1,000 t of ceramic material. Thus, the facility must handle a minimum of 20 kg of Pu / operating day and double this amount during surge operation. In addition, the Facility requires a 1-month inventory (417 kg) of Pu-loaded ceramic material in storage for processing operations. At the Receiving Facility, the material will be received in 208-liter (55-gal) drums containing 14,860 pellets loaded with 5.1 kg of plutonium, which will be opened, inspected and resealed. Furthermore, batch operations associated with the bucket delivery and pump delivery modes of emplacement of the pellet-grout mixture within the borehole, involve processing of batches of pellets containing 834 kg and 200 kg of plutonium, respectively.

These figures represent the plutonium flow rates in the areas where handling, interim storage and disposal operations are being carried out.

DOE Orders set rigid guidelines for determining Category I, II, III, and IV materials when Pu is the attractive element. Each sample category is defined by an 'attractiveness level' which grades the material against a set of criteria associated with its material form and/or elemental purity, and a 'kg. quantity level' which is simply a measure of the mass of Pu present in the sample. The Category assigned to a collection of Pu-laden materials directly determines their security protection level. High-grade Pu materials, without regard to form, are identified as Category I or II materials and require the highest level of protection if they exceed an aggregate Pu mass of 2 kg. From the discussion in the previous paragraph, although each pellet contains only 0.3432 g of Pu, the expected collections of pellets in any one place at the facility easily exceed the 2 kg limit to allow for projected disposal operation rates.

A fundamental uncertainty regarding material attractiveness for immobilized forms is whether, for example, high-grade plutonium, immobilized and diluted in an inert matrix, can be identified with a lower level of attractiveness (i.e., classified as 'other materials' with an attractiveness level E and a corresponding Category IV assignment). In principle, this would significantly lower the plutonium category and, thereby, would lower the necessary level of protection. Pelletized forms are small spheres, 1 in. diameter, that have the potential to be easily removed from a site if handled in small batches and in the absence of strict monitoring protocols. Thus, in the proposed Facility design, even though it would require the diversion of a great many pellets to provide a critical level of concern, the pellets will be handled in large batches under strict monitoring protocols to significantly reduce the diversion potential of individual pellets.

The issue of protection levels for Pu pelletized forms can be considered from another perspective as well. The term 'Spent Fuel Standard' was used by the *National Academy of Sciences (1994)* in their study of the management and disposition of excess weapons plutonium. In brief, the NAS study suggested that Pu disposal forms should be '...rendered at least as proliferation resistant as the Pu existing in commercial spent fuel.' and stated that '...deep boreholes represent a class of options that go a long way towards eliminating the proliferation risks posed by excess weapons plutonium...'. To establish a framework for selecting plutonium disposition options which would possess a high degree of proliferation resistance, the *National Academy of Sciences (1994)* reviewed a number of options and concluded that the national objective should be to make the surplus weapons-grade "plutonium roughly as inaccessible for weapons use as the much larger and growing quantity of plutonium that exists in spent fuel from commercial reactors," a state they defined as the *Spent Fuel Standard*. The Department of Energy (DOE) has enhanced this statement by defining the *DOE Spent Fuel Standard* as "a concept to make the plutonium as unattractive and inaccessible for retrieval and weapons use as the residual plutonium in the spent fuel from commercial reactors" (*DOE, July 17, 1996*). Thus, in applying the Spent Fuel Standard, to this Immobilized Deep Borehole Disposition Alternative, the Standard is more broadly interpreted as in the DOE Spent

Fuel Standard to include not only the proliferation resistance conferred by the dilute form of the plutonium immobilized in ceramic pellets, but also the physical inaccessibility to all except the host country in possession of the site and high cost of physically retrieving the disposed material.

In summary, when viewed from the perspectives of both the DOE regulations and the protection standards derived from the NAS study, at this time the Safeguards and Security requirements for the Pu-loaded ceramic pellet disposal option cannot be significantly moderated or relaxed below those stated above.

1.4.6.1 Physical Security System Requirements and Facilities

Programmatic activities shall be conducted within security areas designated as (1) Property Protected Access Areas (PPA), (2) Limited Access Areas (LA), and (3) Protected Access Areas (PA). A site plan noting these areas is shown in Figure 1.4.2-3.

Operations involving the plutonium disposal form in the Surface Processing Facility must be performed in a Material Access Area (MAA) which is hardened for security purposes. The MAA and facilities supporting MAA operations are located in a PA. Also, the Emplacement and Borehole Sealing Facility which later receives the ceramic pellets is also within a PA. Each PA is secured with a **double fence and intruder detection systems**. The PA and operations involving classified **materials are contained** within the LA. The PPA surrounds the LA and includes the buffer zone **around the facility**. The passenger vehicle parking and personnel services (e.g. **cafeteria, training center**) facilities are located outside the LA but within the PPA.

The Security Center will contain the Access Control and Monitoring **Center** for safeguarding the main facility area and the borehole array area. This facility **will be manned 24-hours a day**. The features provided for physical protection of the site include site fencing, intruder detection devices, site lighting and closed circuit remote viewing systems, communications systems, personal access/egress control systems, **guardhouses and vehicle control stations** (rail, truck and passenger vehicles). The PA and LA area fences of the site will be lighted at night, and be protected by intruder alarm systems and remote surveillance capabilities 24 hours a day. Manned entry **portals provide access to the site**.

The Security Processing - **Employees/Visitors Center** in the Personnel Services building in the PPA zone will serve as the **initial point of entry** for plant visitors. Functions performed in this area include **badge and pass**, security office, file room, visitor control room and visitor orientation rooms. Space is provided for badging and dosimeter distribution for plant employees.

Regular access to the PPA of the facility by pedestrians and vehicles will be through the West gate where a guardhouse and access control facility is located. Visitors will be routed to the Security Processing - **Employees/Visitors Center** for clearance,

made for t

Materials Control and Accountability

l control and accountability (MC&A)
s sufficient to detect and deter the un

of special nuclear
materials are in their aut
The facility's nuclear MC
security program e
material inventori
diversion of nuclea
in-place.

A
computer
The syste
indicating
point that
every 6 m

any an

te systems

control ac-
materials, at

the integrity of the sys

ability for loss and

plied to every process transfer
inventory is performed

is
al
al
nd
ar

Process Waste Management Buildings together form a Material Balance Area (MBA). The plutonium receiving area will satisfy all physical security requirements as described in DOE Order 5632.1C and DOE M5632.1C-1. When plutonium is classified because of configuration/ content, etc., it shall also receive the protection required by the highest level of classification appropriate for its potential military application. The amount of nuclear material entering this MBA complex is determined by shipping records and may be validated by direct measurement.

1.4.6.3 IAEA Safeguards Requirements

The International Atomic Energy Agency (IAEA) is responsible for independently verifying that significant quantities of nuclear material have not been diverted for unauthorized uses. The primary goal of the IAEA is to detect the theft or diversion of one 'significant quantity' of SNM within a specified period of time. The time period is intended to be related to the time required to convert different forms of nuclear material to the metallic component required for a nuclear explosive. For plutonium metal, this time period is 7 to 10 days, and one significant quantity (SQ) is 8 kg. of contained plutonium as identified in the *IAEA Safeguards Glossary (1987)*.

Surplus fissile material storage and processing activities at the facility shall be designed/modified to accommodate international and domestic safeguards, security protection, and transparency requirements. The International Inspection Area is used by international inspectors for inspection and verification of Surplus Material. The physical inventory verification (PIV) method is dependent on the type and form of material. The inspection area houses international agency provided equipment to conduct authorized surveillance without allowing access to classified information. These activities may also include site visits for the purpose of reviewing documentation and recorded information from installed instrumentation and CCTV cameras. Special uninterruptable power supply (UPS) and other systems may be required by international agreements. International requirements are found in IAEA Information Circulars, and in *Safeguards Criteria 1991-1995 (1990)*.

The objective of IAEA safeguards is the timely detection of the diversion of significant quantities of nuclear materials to activities which have military applications. Material accountancy is used together with containment and surveillance as complementary safeguards techniques. A system of accounting for the control of all nuclear materials will be based on a structure of material balance areas (MBA).

To satisfy IAEA verification requirements, the site must establish acceptable procedures for identifying, reviewing and evaluating differences in shipper-receiver measurements, for taking acceptable physical inventories and for the evaluation of accumulations of unmeasured inventory and unmeasured losses. Additionally, an acceptable system of records showing, for each MBA, receipts for changes involving transfers into and out of such areas. Provisions must also be made to insure that accounting procedures and other arrangements are being operated correctly. All of these

feature should be accommodated by the general Materials Balance and Accounting activities described in the previous section.

1.4.7 Site Characterization

Siting Philosophy

The borehole system relies mainly on natural systems to prevent mobilization and migration of emplaced fissile materials. The major element is careful site selection to ensure favorable geologic conditions that provide natural long-lived migration barriers. These conditions include deep, extremely stable rock formations, strongly reducing groundwaters (brines) with increasing salinity with depth, and most importantly, demonstrated isolation or non-communication with the biosphere over geologic timescales. The isolation is the most important characteristic, with the other conditions mainly being those that will enhance the potential of locating and maintaining the isolated zones.

Site characterization involves measurement of the surface and subsurface properties of a candidate site and the assessment of the suitability of that site for the development of a deep borehole disposal facility. This includes characterization of the vertical and horizontal flow rates of brine; geochemical composition, pH and Eh of brines at depth; temperature and salinity gradients; compositional, chemical, hydrological, thermal and mechanical properties of host rock at depth; characterization of fracture distribution and properties; borehole logging, surface seismic and cross-borehole acoustic/electrical tomographic imaging methods for definition of geologic structure and rock properties; cross-borehole pressure and tracer tests for hydrologic characterization; tectonic and seismic stability of the geologic formation.

Candidate Geologic Media with Desirable Characteristics

The different types of geological media considered for either a mined disposal or deep borehole disposal facility include: 1. Plutonic/metamorphic ("basement") rocks, 2. Evaporites (rock salt and anhydrite), 3. Sedimentary rocks (shale and related rocks), 4. Mafic lavas (flood basalt), 5. Tuffs (consolidated volcanic ash deposits), and 6. Unconsolidated rocks or sediments.

The site selection process should consider whether geologic evidence demonstrates long term stability and conditions suitable for fissile material isolation. The following are some of the characteristics that should be taken into account when evaluating a site: 1. Minor historical seismic activity, 2. Gradual, rather than steep thermal gradient, 3. Little or no evidence of Cenozoic or Mesozoic hydrothermal, volcanic, or tectonic activity, 4. The presence of high salinity in brines at depth that exhibit geochemical evidence of long term stability (e.g., gravity stabilized density

emj

in considerable
be... cility, it app
formation would be the be

following cl
continuous c

ty woul

cont

m, s

will b
my st

l site with the fe
t and should be

the c
ling :
n cy

t should

should be Pres

on that are either c
the area should be

and earthquakes with a Mercalli intensity c
ompressional and the T
ging from 15 °C/km to a
l to range from < 60 °C t
t of the deep fluids at th
ine high grade metam
ie...

topic and
tured in
minimize

heterogeneities within the target rocks, the host rock should preferably be a plutonic body with a map area of $> 100 \text{ km}^2$ that is relatively homogeneous texturally and structurally.

Below 1 km, the site should have a seismic velocity structure that is consistent with the absence of through-going, high permeability fractured regions. A few shallow fracture zones, with low seismic velocities, may be present, but should persist only over short distances. Permeabilities may be as low as 10^{-20} m^2 . As demonstrated in other deep drillholes, the salinities of fluids will generally increase with depth, although the actual observed gradients and compositions are expected to vary from site to site, depending on the natural heterogeneity of the host rock and its history of evolution. The site should be selected to maximize the reducing character of brine because the solubility of Pu, in both oxide and ceramic forms, is extremely low in reducing environments. The presence of gravity stabilized density gradients would suppress upward migration of fissile materials due to the buoyancy forces that arise from either the geothermal gradient or the small amount of heat generated by the radioactive decay of the emplaced fissile materials.

Siting Methodology

The siting process is therefore a key element in selecting a site with adequate long-term performance. The process consists of two phases. First, large geologically suitable areas are screened and a few sites selected that will be further characterized. Since it is difficult to prove a site acceptable without detailed work, unsuitable areas will be screened out through use of existing regional studies. Suitable remaining sites will be studied in more detail, using non-invasive techniques such as surface mapping, surface sample analysis, and geophysical surveys. The first phase is therefore an effort to locate areas likely to have favorable characteristics without disqualifiers.

When an absence of disqualifiers for a site is determined, the second site-specific investigation phase is begun. It is expected that several candidate sites will be chosen. At each, small diameter pilot coreholes will be drilled. The core from these holes will be subjected to extensive laboratory testing. The holes will be geophysically logged and results tied into the surface geophysical surveys. Fluid analysis and hydrologic testing on the holes will determine if favorable isolation conditions are present. Drilling parameters will be measured and used to fine tune the drilling program for the emplacement holes if the site is chosen. Additional site data will be obtained as each large diameter emplacement hole is cored and drilled. Cross-hole hydrologic and geophysical testing will be performed on each additional hole, as well as the standard logging as performed on the pilot holes.

These site-specific tests in this second phase are designed to determine if the rock mass has been functionally isolated for geologic timespans, and if the isolation can be maintained for long timescales.

1.4.8 Performance Assessment

Performance assessment studies attempt to predict the post-closure performance of the deep borehole facility in support of 1. the initial site screening and site selection phases, 2. the site characterization, facility design and licensing phases in the development of a deep borehole disposal facility after a suitable site has been selected, and 3. confirmatory assessments during the construction and operation of the facility as additional data becomes available.

Performance assessment involves the quantification and prediction of the mechanisms for initiation of fluid flow; transport of plutonium and daughter products in borehole, host rock and along pathways towards the biosphere; Pu release rate from the disposal form; Pu re-concentration mechanisms and evaluation of long-term criticality risk; borehole integrity; grout durability and performance; ES&H, criticality and proliferation risk assessments; natural analog studies of naturally occurring radioactive ore bodies and fossil geologic reactors to support long-term performance predictions; integrated systems level performance; cost analyses for design optimization.

To be able to successfully undertake performance assessment leading to a successful license application, it is necessary to undertake this activity within the context of an integrated research and development, site characterization, facility design program including the following program elements:

1. *Acquiring the required field data* on the conditions at large subsurface depths through an experimental site characterization program at a generic site,
2. *Extending and specializing existing performance analysis models or developing new models* for coupled fluid flow, reactive plutonium transport, plutonium release and disposal form dissolution, downhole short and long term criticality assessments, geomechanical analyses, ES&H and proliferation risk assessments, and cost analysis to the deep borehole application,
3. *Acquiring unavailable data* required by the above predictive models through laboratory and field experiments that simulate downhole conditions (natural analog studies can provide some of this data and assist in validation of transport codes),
4. *Developing the required engineering and operations technologies* required to safely and efficiently implement the site characterization, drilling, emplacing, borehole sealing, and remote monitoring activities associated with construction, operation and post-closure performance of a Deep Borehole Disposal Facility,
5. *Performing the long term performance, risk and cost assessments* required to support the facility design and licensing activities,

6. *Demonstrating the developed drilling, emplacement and sealing technologies through a pilot large diameter deep borehole field demonstration, and*
7. *Preparing a Conceptual Engineering Design of the Deep Borehole Disposal Facility to provide an early basis for evaluating the technical and economic feasibility and licensability of this disposition alternative.*

1.5 INTERSITE TRANSPORTATION

Overview

The transportation and packaging analysis provides information on transporting the surplus fissile material and other radioactive material from the Feed Originating Facilities to the Disassembly, Conversion & Immobilization Facility and the Deep Borehole Disposal Facility.. The analysis defines the mode of transport and package requirements for each transportation segment and defines any transportation or packaging regulatory requirements pertaining to the alternative. The package is selected to meet shielding, containment, and regulatory requirements while optimizing the cost and complexity of transporting the material, storing, handling and processing at the facilities.

Regulations

Transportation of plutonium and associated wastes will be subject to government regulations such as the Nuclear Regulatory Commission (NRC), the Department of Transportation (DOT), and the Department of Energy (DOE). Different regulations may apply for different portions of the immobilized end-to-end flow depending upon which agency has authoritative control. An assumption for FMDP is that any new facility that is required to accomplish the Immobilized alternative will be licensed by the Nuclear Regulatory Commission (NRC). **Any currently existing site will maintain the current status of authoritative agency (DOE).**

The NRC regulation (10CFR71) establishes the requirements for packaging, preparation for shipment, and transportation of licensed material. **This regulation also defines the procedures and standards for obtaining NRC approval of packages and shipping procedures for fissile material and Type B quantities of other licensed materials. (A quantity of weapons-grade plutonium in excess of ~25 mg constitutes a Type B quantity per 10CFR71.)** The 10CFR71 regulation incorporates, **by reference, DOT regulation 49CFR170-189.** Whenever possible, the DOE transports radioactive materials **under NRC regulations.** However, for the purpose of national security, **49CFR173.7 (b) allows the DOE to ship radioactive material under escort by personnel designated by the DOE, thus waiving the DOT regulations in 49CFR170-189. This exemption, however, is rarely used and it's use is not anticipated in the FMDP.**

There are different requirements for the transportation of nuclear materials whether the movement of materials is considered onsite (intrasite) versus offsite (intersite). Currently, there are no federal regulations governing onsite transport of hazardous materials. For DOE facilities, on-site and offsite transport are defined in *DOE Order 460.1 (approved 9-27-95)*. Onsite is any area within the boundaries of a DOE site or facility that is fenced or otherwise access-controlled and offsite is any area within or outside of a DOE site to which the public has free uncontrolled access.



Transportation System

There are two intersite transportation segments for the end-to-end Immobilized Deep Borehole Disposition Alternative: 1. Between the Feed Source Facilities and the Disassembly, Conversion & Immobilization Facility, and 2. Between the Disassembly, Conversion & Immobilization Facility and the Deep Borehole Disposal Facility. These intersite transportation segments are summarized in Figure 1.1-1.

1.5.1 Transportation Between the Feed Originating Sites and the Disassembly, Conversion & Immobilization Facility

In this transportation segment, fissile material located at various DOE facilities is transported to the Disassembly, Conversion & Immobilization Facility onsite temporary storage. The categories of material requiring transportation include: pits, clean metal, impure metal, impure oxide, clean oxide, alloys, **compounds**, rich scrap, miscellaneous material, and reactor **fuel**.

Package Description

The pits under the FMDP program will be stored and transported in the Model FL or AT-400A containers. These containers can be utilized for different types of pits by using different internal fittings.

The other non-pit plutonium materials are assumed to be in onsite storage at the various DOE facilities with the material/packaging meeting *The Criteria for Safe Storage of Plutonium Metals and Oxides* as specified in the DOE standard DOE-STD-3013-94 of December, 1994. For out-of-line storage, this document states that all plutonium metal and oxides (excluding pits) over 50 weight-percent plutonium shall be either:

- Sealed in a material container **nested in a boundary container (until a primary containment vessel can be used); or**
- Sealed in a boundary container **nested in a primary containment vessel (PCV).**

The design goal for the boundary container and PCV storage package is that the entire package system should be maintenance free and be qualified for shipping offsite without additional repackaging.

For transporting the plutonium material (non-pit), the PCV would provide the first containment boundary. The PCV would then be loaded into another "6M/2R-like" shipping container, which could provide double containment if required. Information regarding "6M/2R-like" packages is given in the document "*Mini-Pac Fissile Material Packaging Needs Assessment*" (Feb., 1994). Two packages that exemplify the 6M/2R-like packaging are the SAFKEG and the Model 9968. These specific packages would

require modifications to insure that the packaging criteria stated in DOE-STD 3013-94 are met. Further modifications would be required to insure that: 1. the packaging configuration incorporates the PCV, 2. analysis/testing is performed to show the abnormal and normal accident scenarios, and 3. the Safety Analysis Report is modified to show the changes. Many different 6M/2R-like packages can be used because the maximum dimensions for the PCV must fit inside the secondary containment vessel of existing shipping packages. Currently, the maximum PCV dimensions are 15.3 cm (6 in.) for the outer diameter and 43.2 cm (17 in.) for the height of the container.

Shipment Information

A ten year FMDP shipment campaign has been assumed with a total quantity of 50 t of Pu. There are two intersite transportation segments as shown in Figure 1.1-1. The requirements of these segments are described below. The total number of packages and shipments is shown in Table 1.5.1-1. The information in Table 1.5.1-1 applies to all the FMDP alternatives because the program has mandated that all alternatives must accept all the feed materials for the PEIS and the ROD analysis. The amount of Pu in each shipment for each feed material type will be different. The maximum Pu in a containment vessel for all feed materials is given in Table 1.5.1-1.

Table 1.5.1-1: Intersite Transportation Between the Feed Source Facilities and the Disassembly, Conversion & Immobilization Facility

Item	Value
Maximum Pu in containment vessel CV (kg)	4.5
Quantity Pu/yr (kg)	5,000
Total Disposal Quantity Pu (kg)	50,000
# packages/yr (6M/2R-like + pit containers)	3,100
Total # packages (6M/2R-like + pit containers)	31,000
SST shipments/yr	110
Total shipments	1,100

2.0 CRITERIA ASSESSMENT

Overview of Criteria Assessment

The selection of a particular alternative for disposition will be based on a set of eight criteria similar to those developed for the initial screening of fissile material disposition options. These criteria, against which the Deep Borehole alternative will be assessed, are:

1. Resistance to theft and diversion by unauthorized parties
2. Resistance to retrieval, extraction and reuse by the host nation
3. Technical viability
4. Environmental, safety and health
5. Cost effectiveness
6. Timeliness
7. Fosters progress and cooperation with Russia and other nations
8. Public and institutional acceptance

These criteria can be divided into four major groups of closely related criteria. These four groups, or objectives are:

- ***Non-Proliferation***, which includes resistance to theft, resistance to reuse, and international cooperation (Criteria 1, 2 and 7),
- ***Operational Effectiveness***, which includes technical viability, cost effectiveness, timeliness and additional benefits (Criteria 3, 5, and 6),
- ***Environmental, Safety and Health***, which includes human health and safety, environmental protection, and socio-economic effects (Criterion 4),
- ***Public and Institutional Acceptance*** (Criterion 8).

Both Deep Borehole Disposition Alternatives address each of the eight criteria favorably, with the possible exception of timeliness that depends on legislative and regulatory actions. For clarity, we address the criteria in the order set by the above four objectives, noting any discriminating differences between the different Deep Borehole and other alternatives. The Immobilized Deep Borehole Disposition Alternative includes many of the pre-processing steps required by many (most) other alternatives. This will roughly equate proliferation risks inherent in the processing and transport operations, the operational effectiveness, ES&H, and public and institutional acceptance with other immobilization alternatives. Concerns over plutonium criticality, migration or release for the emplaced plutonium will be addressed in the research, development, demonstration and test phases of the program.



Operational I

The o

high, 1
lling c

regul
e both
to th
ave s
hole c
e rapi

Tea

le - b
be T
rec o
th t.
e for other immobil
mium in the borehc

is
casi
rol
inte

beca
lispo:
s use.

all the 18 18 18 18 18 18

nselves.
ively low
options

nd deep borehole dispositio

in
tal
18

less of this alternati

development phases. Initial assessments appear to minimize the threat of unacceptable migration or release.

Public and Institutional Acceptance

The principal public and institutional acceptance issues for this alternative (and the other deep borehole alternatives) are regulatory and licensing related. As with any of the disposition alternatives, local or regional opposition to the project will likely manifest itself in the regulatory and licensing process as well as other channels. The relative newness of the deep borehole concept may be a source of public and institutional concern and resistance. This will be partially, if not entirely, offset by the technical soundness and low risks of deep borehole disposition.

Summary

It is anticipated that this alternative will rank higher than the other borehole alternatives due to its superior long-term performance with respect to ES&H and post-emplacement proliferation resistance although it incurs more plutonium handling, processing and, possibly, greater cost to achieve this superior performance.

ing container

ning approximately 2.25 kg of Pu. The
in the Pu Processing Facility at the
ion Facility where accountability measuremen
it is then processed by conversion to oxide and
e Pu-loaded coated ceramic pellets. The Pu-lea

ged in large doubly-conta
(cages) for transportation
ble Disposal Facility, the
they are transported as r

disposal Facility. At the Deep
stored in protected lag-storage

facility for

ess or by c

B
at
A
T
e

are or
proce
E-

... ..



1. The first part of the document is a...

2. The second part of the document is a...

3. The third part of the document is a...

4. The fourth part of the document is a...

5. The fifth part of the document is a...

6. The sixth part of the document is a...

7. The seventh part of the document is a...



(Criterion 2) perspectives, and are based on two important factors: the 'threat' posed and the 'regime' in which the threat exists.

The primary purpose of FMDP Domestic Safeguards and Security (Criterion 1) is to protect and provide assurance of non-proliferation of the fissile material and classified information, and to instill public and international confidence in those actions. Domestic safeguards and security (S&S) is composed of two subsystems: 1. nuclear materials control and accounting, and 2. the physical protection of fissile material (FM) and nuclear weapons components against threats of diversion, theft, or radiological/toxicological sabotage. Domestic safeguards primarily address unauthorized actions perpetrated by individuals and/or sub-national groups (insiders or outsiders). The detection and prevention of an unauthorized access or removal attempt (e.g., theft or diversion) depends on the levels of safeguards and physical protection provided at the facility. Generally, safeguards are more easily applied and more readily verified when materials are in the form of discrete, uniquely identifiable items, as opposed to difficult to measure bulk forms, common in chemical processing activities. The DOE, and the NRC, have established requirements for domestic safeguards and security. In the U.S., both the DOE and the NRC have specific orders or regulations that identify physical protection, and material control and accounting requirements. These specify safeguarding measures that must be followed as determined and negotiated based upon the category and attractiveness of the fissile material. For this alternative it is assumed that the plutonium processing facilities will be DOE regulated with DNFSB oversight and will not be subject to NRC regulations. The remaining facilities also will be assumed to be governed by NRC regulations.

The responsibility of the domestic regime is to prevent unauthorized access to its material either by individuals or groups within its own weapons complex (such as disgruntled workers) or by national or international terrorist groups, criminal organizations, etc. The domestic threats can be grouped into four categories as: theft (e.g., unauthorized removal of material by an individual/group outside the host nation's weapons complex), diversion (e.g., unauthorized removal of material by individual/group belonging to the host nation's weapons complex), retrieval (unauthorized access by outside individuals/groups after final disposition), and conversion (the conversion of retrieved material into weapons usable form).

2.1.2 Applicable S&S Requirements and Measures

The Domestic Theft and Diversion Criterion (Criterion 1) evaluates the system protection and resistance to theft by an outsider, and/or an insider and retrieval after final disposition by outside groups. Theft or diversion of material refers to both overt and covert actions to remove material from the facility. This is perpetrated by unauthorized parties including terrorists, sub-national groups, criminals, and disgruntled employees. Protection of the material and information from these parties is a domestic responsibility, not an international one. There are a number of possible adversary groups with different motivations and capabilities. The actions could be overt such as a direct attack on a

facility or could involve covert measures that might utilize stealth and deception, as well as possible help from an 'insider.' It is assumed that all facilities will meet the necessary S&S requirements. Therefore, many of the S&S standards (guards, gates, etc.) are not directly discussed in this document (See the specific PEIS). The threats to facilities will be different depending the form of the material, the activities at the facility and the barriers to theft (both intrinsic to the material and to the facility). For each of the facilities in this alternative a brief discussion is presented below of the *potential risks to theft*.

An essential element in assuring the resistance of fissile material to theft and proliferation, is the safeguards and security applied to the material, based on its form. The form of the material reflects the intrinsic properties of the material, which dictates its attractiveness for its use in nuclear weapons. However, the form of the material alone does not provide proliferation **resistance**. Safeguards and security systems should be applied in a graded approach based on the form of the material and its attractiveness.

The DOE defines the attractiveness level of nuclear material through a categorization of types and compositions that reflects the relative ease of processing and handling required to convert that material to a nuclear explosive device. Table 2.1-1, derived from DOE Order 5633.3B on *Control and Accountability of Materials* identifies these categories.

The level of protection accorded to an **attractiveness level** depends on the **quantity or concentration** of the material. Each **category of protection has its own** requirements from the highest level of protection Category I, for **assembled weapons**, to Category IV for self-protecting (irradiated) forms and less than three **kilograms of low-grade material**. Protection of the material is accomplished through a graded system of deterrence, detection, delay, and response as well as material control and accountability. Layers of **protection may** then be applied to protect material of greatest attractiveness **within the innermost layer and with the highest controls**. Material of lesser attractiveness does not require as many layers of protection and fewer controls.

carried items. MAA/PA portals typically have metal detectors, FM detectors, and/or X-ray machines for hand-carried items.

2.1.3 Identification of Diversion, Theft, or Proliferation Risks

Tables following this narrative provide information about the flow of plutonium through this alternative, along with a description of the material and its changing attractiveness levels.

- **Disassembly, Conversion & Immobilization:** The plutonium processing building of this facility will be a Category I facility. A number of different forms are received by the plutonium processing facility (Cat. I-B through II-D). This material is converted into oxide (Category I-C). For this facility most of the material is in a very attractive form with minimal intrinsic barriers. There are a large number of processing steps that provide increased opportunities of covert theft. Since many of the processes involve bulk material the accountability measures will involve bulk measurements. In the case of an overt theft attempt the targets of greatest concern would be the plutonium pits, pure metal, and oxides that are very transportable. However, these materials would be under significant protection so that the risk associated with an overt event would be acceptable. At the Facility the oxide is mixed with a ceramic matrix material, reducing the attractiveness level. Within the facility material will be changing form and concentration, decreasing the protection category and attractiveness.

The facility operations involve a large number of processing steps and relatively accessible bulk materials. As the plutonium oxide is blended with matrix materials the concentration of the plutonium decreases. Since these forms are still relatively accessible and transportable, they are attractive targets for covert and overt theft. There is some concern with the capability to perform accurate accountancy measurements after this processing occurs. However, it is reasonable to assume that containment and surveillance, coupled with accurate measurements prior to matrix mixing, and item accounting thereafter, will be as acceptable in this facility as it is in others (i.e., fresh MOX fabrication and spent reactor fuel). Research and development should be conducted, however, to assure that the best technically viable methods can be used to satisfy the public and the international community that this concern, for weapons program materials, has been adequately addressed.

- **Deep Borehole Disposal Facility:** The immobilized material is received in drum-type doubly-contained transportation packages (Westinghouse Type B package) each containing 5.1 kg of Pu in ceramic pellet form and weighing 510 kg each. The material is a low attractiveness target for covert and overt theft.

Risk Assessment

The measures identified for this criteria are the *environment (S&S), material form, and S&S assurance*. These measures are briefly described below and a qualitative discussion of the relative risks is presented for each of the facilities in this alternative. The Tables provided below contain specific information derived from Alternative Team data and other sources (DOE Orders, etc.). S&S Table 4 summarizes the potential risks. ***This assessment is highly qualitative, and is based only on available data.*** This assessment must be refined in Phase III of the decision process (prior to ROD). It must also be supported by the FMDP multiple attribute decision analysis effort.

Environmental Conditions

The logistics, physical location, and the state during processing, transportation, or storage affect the opportunities for theft. The more complex the logistics (e.g., transfers and process locations), the more opportunities there are for theft. The more inaccessible the physical location (e.g., storage locations), the fewer opportunities are there for theft. The environmental conditions of the Deep Borehole Disposal Alternative is discussed below and their S&S attributes are listed in Table 2.1-2.

- ***Disassembly, Conversion & Immobilization Facility:*** This facility involves a large number of processing steps with a relatively high throughput. Based on the quantity and attractiveness of the material, this will be a Category I facility. Waste streams containing fissile material will be generated and thus require monitoring to prevent possible theft or use as a diversion path. There will be lag storage in an active vault. There will be no intrasite transport movements (i.e., outside of the facility). SSTs will be used to deliver and pick up the material. Although operations for a single batch are relatively short there will a large number of batches needed to meet the proposed throughput obligations, and therefore the opportunities for possible adversary actions are numerous. Waste streams containing fissile material will be generated during processing activities. Once the material has been immobilized, it will be stored in a separate location (Category II-D) and the only transport will involve moving the containers from the storage area to the borehole. No fissile material waste streams are generated in storage.
- ***Deep Borehole Disposal Facility:*** The form attractiveness of the materials remain the same as that at the Disassembly, Conversion & Immobilization Facility back-end product stage. The very low concentration of Pu in the pellets coupled with emplacement deep underground, makes the material very unattractive.

**Table 2.1-2: Environment Assessment
for Immobilized Deep Borehole Disposition**

Environment	Intersite Transport	Disassembly Conversion	Immob. Process	Intersite Transport	Borehole Facility	Borehole Disposal
Activity	Pu feed to Front End Facility	Receiving, NDA, and processing	Immob. in ceramic coated ceramic pellets	Immobilized ceramic pellets to Borehole Facility	Receiving, NDA, mixing with filler ceramic pellets and grout	Emplaced downhole
Duration		3 mths	3 mths.		3 mths.	Forever
Throughput	5 t/yr	5 t/yr	5 t/yr	5 t/yr	5 t/yr	5 t/yr
Waste Streams	No	Yes	Yes	No	No	No
Lag Storage	N/A	Yes	Yes	N/A	Yes	N/A
Maximum Inventory	N/A	2 t	N/A			50 t in 4 holes
Intrasite Transport	N/A	Yes, to Immobilization Process	No	N/A	Yes, to Borehole Array	No
Number of Processing Steps	0	6	4	0	3	1

Material Form

Attractiveness based on physical, chemical, or nuclear (isotopic and radiological) makeup of the nuclear material during processing, transportation, or storage. The risk of theft for weapon use is reduced if the material is only available in small quantities, the physical and chemical form of the material or matrix that makes recovery difficult, or the material has an unattractive isotopic content. The material forms present in the Deep Borehole Disposal Alternative are discussed below and their S&S attributes are listed in Table 2.1-3.

- Disassembly, Conversion & Immobilization Facility:** The material received at the plutonium processing facility is the most attractive material for this alternative (e.g., pits, pure metal and oxide). In the case of pit conversion the attractiveness goes from I-B to I-C. For oxides and other high-grade material the attractiveness level remains at I-C. Overall, the material has very low intrinsic barriers, and is transportable. It has a very low radiological barrier primarily due to the presence of Americium. It is in most cases in a very pure form, as a metal or oxide, and its isotopic composition makes it very usable for a nuclear device. Because pits and some other weapons usable materials are being processed, some of the material and waste streams will be classified. Once the material has been blended it into ceramic form, it would be more difficult to convert to a weapons usable form. Because the concentration of the

Form	at	Metal, oxide and other
SN		Metal, oxide and other
Fo		
Con		> 9
of P		
Att		1
Cat		1
		13.9

g	
ing	
ac	1 mg
c	dow
nd	
ed	Pu-c
	pellet
	Pu-c
	pell
	grout mix

0.5%

2.54 cm
(1 in dia)
ceramic
pellets,
0.34 g/pellet

Safeguards and Security Assurance

The effectiveness of S&S protection depends on the MC&A characteristics, and physical protection capabilities (not directly discussed here) of the processes and facilities. The S&S assurances of the Deep Borehole Disposal Alternative are discussed below and their attributes are listed in Table 2.1-4.

- **Disassembly, Conversion & Immobilization Facility:** Material received into this facility (e.g., pits and containers with TIDs) would require item accountability. Once the material has been removed from the "container" bulk accountability would be necessary. Many of the items are small and many operations involve hands-on activities. In addition to destructive assay other non-destructive assay (NDA) would be performed. As mentioned previously the pits and some other material will be classified. This may also apply to waste streams. During the initial processing in immobilization operations bulk accountability would be performed.
- **Deep Borehole Disposal Facility:** Item accountability is used for the containers. Access is available to the material itself only during preparation of the pellet-grout mix just before emplacement in the borehole. All movements of the casks require special handling equipment.

**Table 2.1-4: Safeguards and Security Assurance
for Immobilized Deep Borehole Disposition**

Safeguards & Security	Intersite Transport	Disassembly Conversion	Immob. Process	Intersite Transport	Borehole Facility	Borehole Disposal
Activity	Pu feed to Front End Facility	Receiving, NDA, and processing	Immob. in ceramic coated ceramic pellets	Immobilized ceramic pellets to Borehole Facility	Receiving, NDA, mixing with filler ceramic pellets and grout	Emplaced downhole
No. of Material Balance Areas	N/A	1-3	1-3	N/A	2	0
Type of Accounting	Item	Item & Bulk	Item & Bulk	Item	Item & Bulk	N/A
Nuclear Measure	N/A	Calorimetry, gamma, seg. gamma neutron	Calorimetry, gamma, seg. gamma neutron	N/A		N/A
Classified Matter	Yes	In - Yes Out - No	No	No	No	No
Accessibility	THN		In - THN Out - CHY	CHY	CHY	CRY

Ability To Achieve The Spent Fuel Standard

The 'spent fuel standard' means that the material is comparable to existing spent fuel at commercial reactors with respect to its environment, material form and safeguards and security. *The final disposition form, environment, and S&S for this alternative meets the spent fuel standard.* Prior to borehole disposition the material does not meet the spent fuel standard and therefore protection commensurate with its attractiveness level must be provided.

S&S Transportation Related Issues

For all Category I material Safe Secure Trailers (SSTs) will be used to move the material between facilities (Intersite). A secure loading/unloading area must be available to ship/receive, verify, and store the Category I material. With respect to other transport activities (e.g., between processing and borehole), there are inherently less S&S risks for overt theft scenarios and a much lower risk for covert theft **attempts**. Minimizing the number and/or duration of the transport steps is desirable.

Primary regulatory requirements for shipment of special nuclear material (SNM) are covered in 10 CFR 71-73, Physical Protection of Plants and Materials, and 49 CFR 100-177, Transportation. From this and other regulations, DOE issued two documents controlling the shipment of SNM: DOE Order 5632.1C, *Protection and control of Safeguards and Security Interests* and DOE Order 5633.3B, *Control and Accountability of Nuclear Materials*. Table I-2, in DOE Order 5633.3B defines four Safeguards Categories (I through IV) and five attractiveness levels (A through E) of materials ranging from weapons to pure products to other material grades. This table is the basis for determining the DOE level of S&S control required for shipment of SNM.

Transportation of SNM such as plutonium exposes the materials to threats of theft and diversion when outside the controlled areas of secured nuclear facilities. The risk of theft and diversion of SNM during transportation can, and should, be minimized by reducing the number and duration of transport steps whenever possible. The risk of diversion or theft of the Pu is greatest during the intersite transportation when the material will be moving on public highways or railroads. Safeguards and security are provided for the two intersite transportation segments, described in Sections 1.5.1, and 1.5.2 as required by DOE Order 5633.3B:

1. The fissile material shipped for the first intersite segment is expected to consist of Category I and II quantities that **fall within** attractiveness levels A and B. As a result these materials will be moved by **Safe Secure Trailer (SST)** in the DOE/AL Transportation Safeguards System.
2. For increased efficiency, the **immobilized Pu** form shipped for the second intersite segment is transported in **25.5 kg lots** by SST in the DOE/AL Transportation Safeguards System

3. The fissile materials in the intrasite segment, i.e., between storage and processing, are also expected to consist of Category I and II quantities with attractiveness levels A and B. However, their movement will occur totally within the boundaries of the site and under site security control. In this case there are inherently lesser S&S risks for overt theft scenarios and a much lower risk for covert theft attempts.

the international reg

with

the U.

country looking at the U.S. While applica
ds may seem excessive, a very important p
on Program is to set an example for other c

The international threats can be c
material by the host nation itself in v

in place), retrieval (in

ed access by the host nation in
disposition), and con

b.

and materials containment and

The first part of the report discusses the general situation of the country and the progress made in the various fields of activity. It is noted that the Government has been successful in maintaining a high level of economic growth and in improving the living standards of the people. The report also mentions the progress made in the fields of education, health, and social services.

The second part of the report discusses the progress made in the various fields of activity. It is noted that the Government has been successful in maintaining a high level of economic growth and in improving the living standards of the people. The report also mentions the progress made in the fields of education, health, and social services.

The third part of the report discusses the progress made in the various fields of activity. It is noted that the Government has been successful in maintaining a high level of economic growth and in improving the living standards of the people. The report also mentions the progress made in the fields of education, health, and social services.

The fourth part of the report discusses the progress made in the various fields of activity. It is noted that the Government has been successful in maintaining a high level of economic growth and in improving the living standards of the people. The report also mentions the progress made in the fields of education, health, and social services.

The fifth part of the report discusses the progress made in the various fields of activity. It is noted that the Government has been successful in maintaining a high level of economic growth and in improving the living standards of the people. The report also mentions the progress made in the fields of education, health, and social services.

address unauthorized access to special nuclear material (Criterion 1). In this alternative it is assumed that all facilities and areas except the plutonium processing area will be subject to IAEA safeguards. Depending on agreements that would be made, between the U.S. and the IAEA, part of the Plutonium Processing Facility may, or may not, come under IAEA safeguards. The key issue here being the protection of classified information known as Restricted Data (nuclear weapons design information).

2.2.2 Applicable S&S Requirements and Measures

The International Diversion, Retrieval, Extraction, and Reuse (Criterion 2) criterion evaluates the system resistance to diversion of material before final disposition by the weapon state itself, retrieval of material after final disposition by the weapon state itself, and conversion of the material back into weapon usable form **covertly** by the host nation/state. Again the *material form, environment and safeguards* are particularly important. Additionally, the *irreversibility* of the material form is important for assessing its reuse in nuclear weapons. Nuclear material for this alternative falls under the IAEA categories of unirradiated direct use (e.g., Pu metal and compounds, MOX powder and pellets, MOX fuel rods and assemblies). The only existing world-wide inspection regime that exists to address this threat is the International Atomic Energy Agency (IAEA). One mission of the IAEA is timely detection of the diversion of nuclear material from declared nuclear activities. An important measure used by the IAEA is the 'significant quantity' (SQ) which is 8 kg for Pu. Since the state owns and operates the physical protection and material control and accountancy measures, the IAEA does not rely on these systems to fulfill IAEA obligations. However, IAEA does perform independent verification of the data from the state's system of material control and accountancy. The IAEA, in performing its safeguards inspection activities, audits the facility records and makes independent measurements of selected samples of each kind of nuclear material in the facility. To help them fulfill their responsibilities, this verification is coupled with a technology known as 'Containment and Surveillance' that is designed to provide 'continuity of knowledge' during an inspector's absence. Much of the C/S equipment used by the IAEA is very similar in technology, and in some cases nearly identical, to the seals and surveillance equipment used by DOE and NRC in physical protection functions. Although the technologies may be the same, the objectives are different. For example, domestic requirements are usually monitored in real-time or near real-time. However, the IAEA may use unattended monitors (CCTV recording, etc.) and return to a site only once every 3 months to check and verify activities.

The philosophies and implementation of international safeguards (commonly referred to as IAEA safeguards) are substantially different from domestic safeguards and security (as DOE and NRC practice). It is likely that these activities will require additional accountability verification (e.g., identification, weighing, sampling and analysis and non-destructive assay (NDA), increased inventories and item checks, containment and surveillance (C/S) measures installed throughout the facilities (e.g., surveillance, seals, monitors, tags), space for inspectors and equipment for independent measurements. In addition, classified and other sensitive information may need to be

...in materials.
...may involve fissile material or

...ing on
...ing of

... do

2.2.3 Possil

The...
presents an increased risk of

are
also
and
and

**Table 2.2-1: Potential Risks for Threats and Criteria 1 & 2
for Immobilized Deep Borehole Disposition**

	Inter-Site Transport	Disassembly Conversion	Immobilization Process	Inter-Site Transport	Borehole Facility	Borehole Disposed
Threat						
Covert Threat	Medium	High	High/Med.	Medium	Low	Very Low
Overt Threat	Medium	Medium	Medium	Medium	Low	Very Low
Diversion	Medium	High	High/Med.	Medium	Low	Very Low
Criterion 1						
Material Form	High	High	High/Med.	Medium	Low	Very Low
Environment	Medium	Medium	Medium	Medium	Low	Very Low
Safeguards and Security	Medium	High	High/Med.	Medium	Low	Very Low
Criterion 2						
Detectability	High	High	High/Med.	Medium	Medium	Very Low
Irreversibility	High	High	High/Med.	Medium	Medium	Very Low

timeliness and irreversibility criteria and the level of safeguards required. In *Disassembly and Conversion*, the process involves very attractive material and high throughputs. The accessibility of the material, low intrinsic barriers and the large number of processing steps makes the risk to possible diversion a concern. Once the material has been diverted the pure metal and oxide could be reused in a nuclear device relatively easily. Because pits and other material in this facility are classified, they would not be under international safeguards unless restricted data could be protected. In *Immobilization*, the attractiveness of the material in the early processing steps is similar to the plutonium processing activities. When the material is blended the concentration of plutonium is decreased and a much greater quantity of material would need to be diverted. Once the material is placed in containers the material becomes more difficult to divert. If diversion does occur chemical barriers exist to make conversion and reuse expensive and time consuming. In *Deep Borehole Disposal*, the emplacement of the material in a deep borehole makes diversion very difficult, expensive, and easily detected by C/S measures. Even if the material could be diverted a considerable effort would be required to convert this material into a weapons usable form.

- **Assurance of Detection of Retrieval & Extraction:** This is the difficulty of detection or diversion of a significant quantity of material. This depends on the following factors: 1. The ability to measure material, the accuracy of applicable NDA techniques, the presence of waste streams, and classification issues which may prohibit measurement, and whether item accounting instead of bulk accounting methods can be applied, 2. Containment and surveillance systems, 3. Timeliness of detection. In *Disassembly and Conversion*, the process involves large quantities of

bulk material and very high throughputs. This makes material accountability very difficult and in some ways inadequate for the IAEA requirements. It will be necessary to have containment and surveillance, as well as other S&S measures, to ensure that material is not being diverted. The presence of classified materials and information further complicates safeguards with respect to international inspection. In *Immobilization* the S&S problems are the same as in the initial steps of the Disassembly and Conversion facility (except there is no classified material). After the material has been blended a greater amount of material will be required to accumulate a significant quantity. In *Deep Borehole Disposal*, the emplacement of this material in a deep geological borehole, along with continuing C/S measures, will ensure the risk after disposition remains acceptable.

2.3 TECHNICAL VIABILITY

Summary

Deep borehole disposition appears to be viable for implementation. Needed technologies are readily available with some reasonable extrapolation. The primary uncertainties revolve around legislation, regulation, siting, licensing and public acceptance, but these issues are qualitatively similar to those faced by other disposition alternatives. Legislative mandate may be required for any disposition alternative. Siting and public acceptance are potential problems with any new nuclear facility. Timely implementation of any alternative probably requires a firm social and congressional mandate and this concept is no different in that regard.


2.3.1 Maturity of Technologies

While no deep borehole facilities for plutonium disposition have ever been developed, many of the technologies needed for this alternative are quite mature, and the basic concept has been considered before.

The front end technologies for processing and converting the various potential Pu feed forms are similar to, or less demanding than those for all other disposition alternatives. Transportation, MC&A and Safeguards technologies are demonstrated, although continued improvements may be desirable. Ceramic pellet production is a mature technology for nuclear fuel production and has been used for Pu containing MOX fuel. The borehole drilling technology is available as an extrapolation from large hole techniques for nuclear weapons testing and deep drilling for resource exploration and geotechnical research. Emplacement methods are similar to proven techniques for emplacing large heavy nuclear weapons tests. Stemming and sealing technology will require extrapolation from methods used for nuclear testing and resource recovery. Indeed, equipment already in DOE inventory, and existing work crews, could probably carry out each activity required.

In the course of developing pre-conceptual designs from which to assess FMDP PEIS discussions were held with experts in each of the relevant technology areas for deep borehole disposition. The feedback received was quite encouraging, and indicates that most of the technologies needed match well with current state of the art. Those areas which require custom development, demonstration, or extrapolation from existing capabilities have been included in the Borehole R&D Plan, with activities and schedules for completion.

The overall concept of deep borehole disposition has been considered in recent decades for disposal of both hazardous and radioactive wastes. This concept received significant investigation in the 1970s for disposal of high-level radioactive waste (HLW) and spent nuclear reactor fuel (SNF). Similar studies have been conducted in other countries including: Russia, Sweden and Belgium. Russia has experience in well

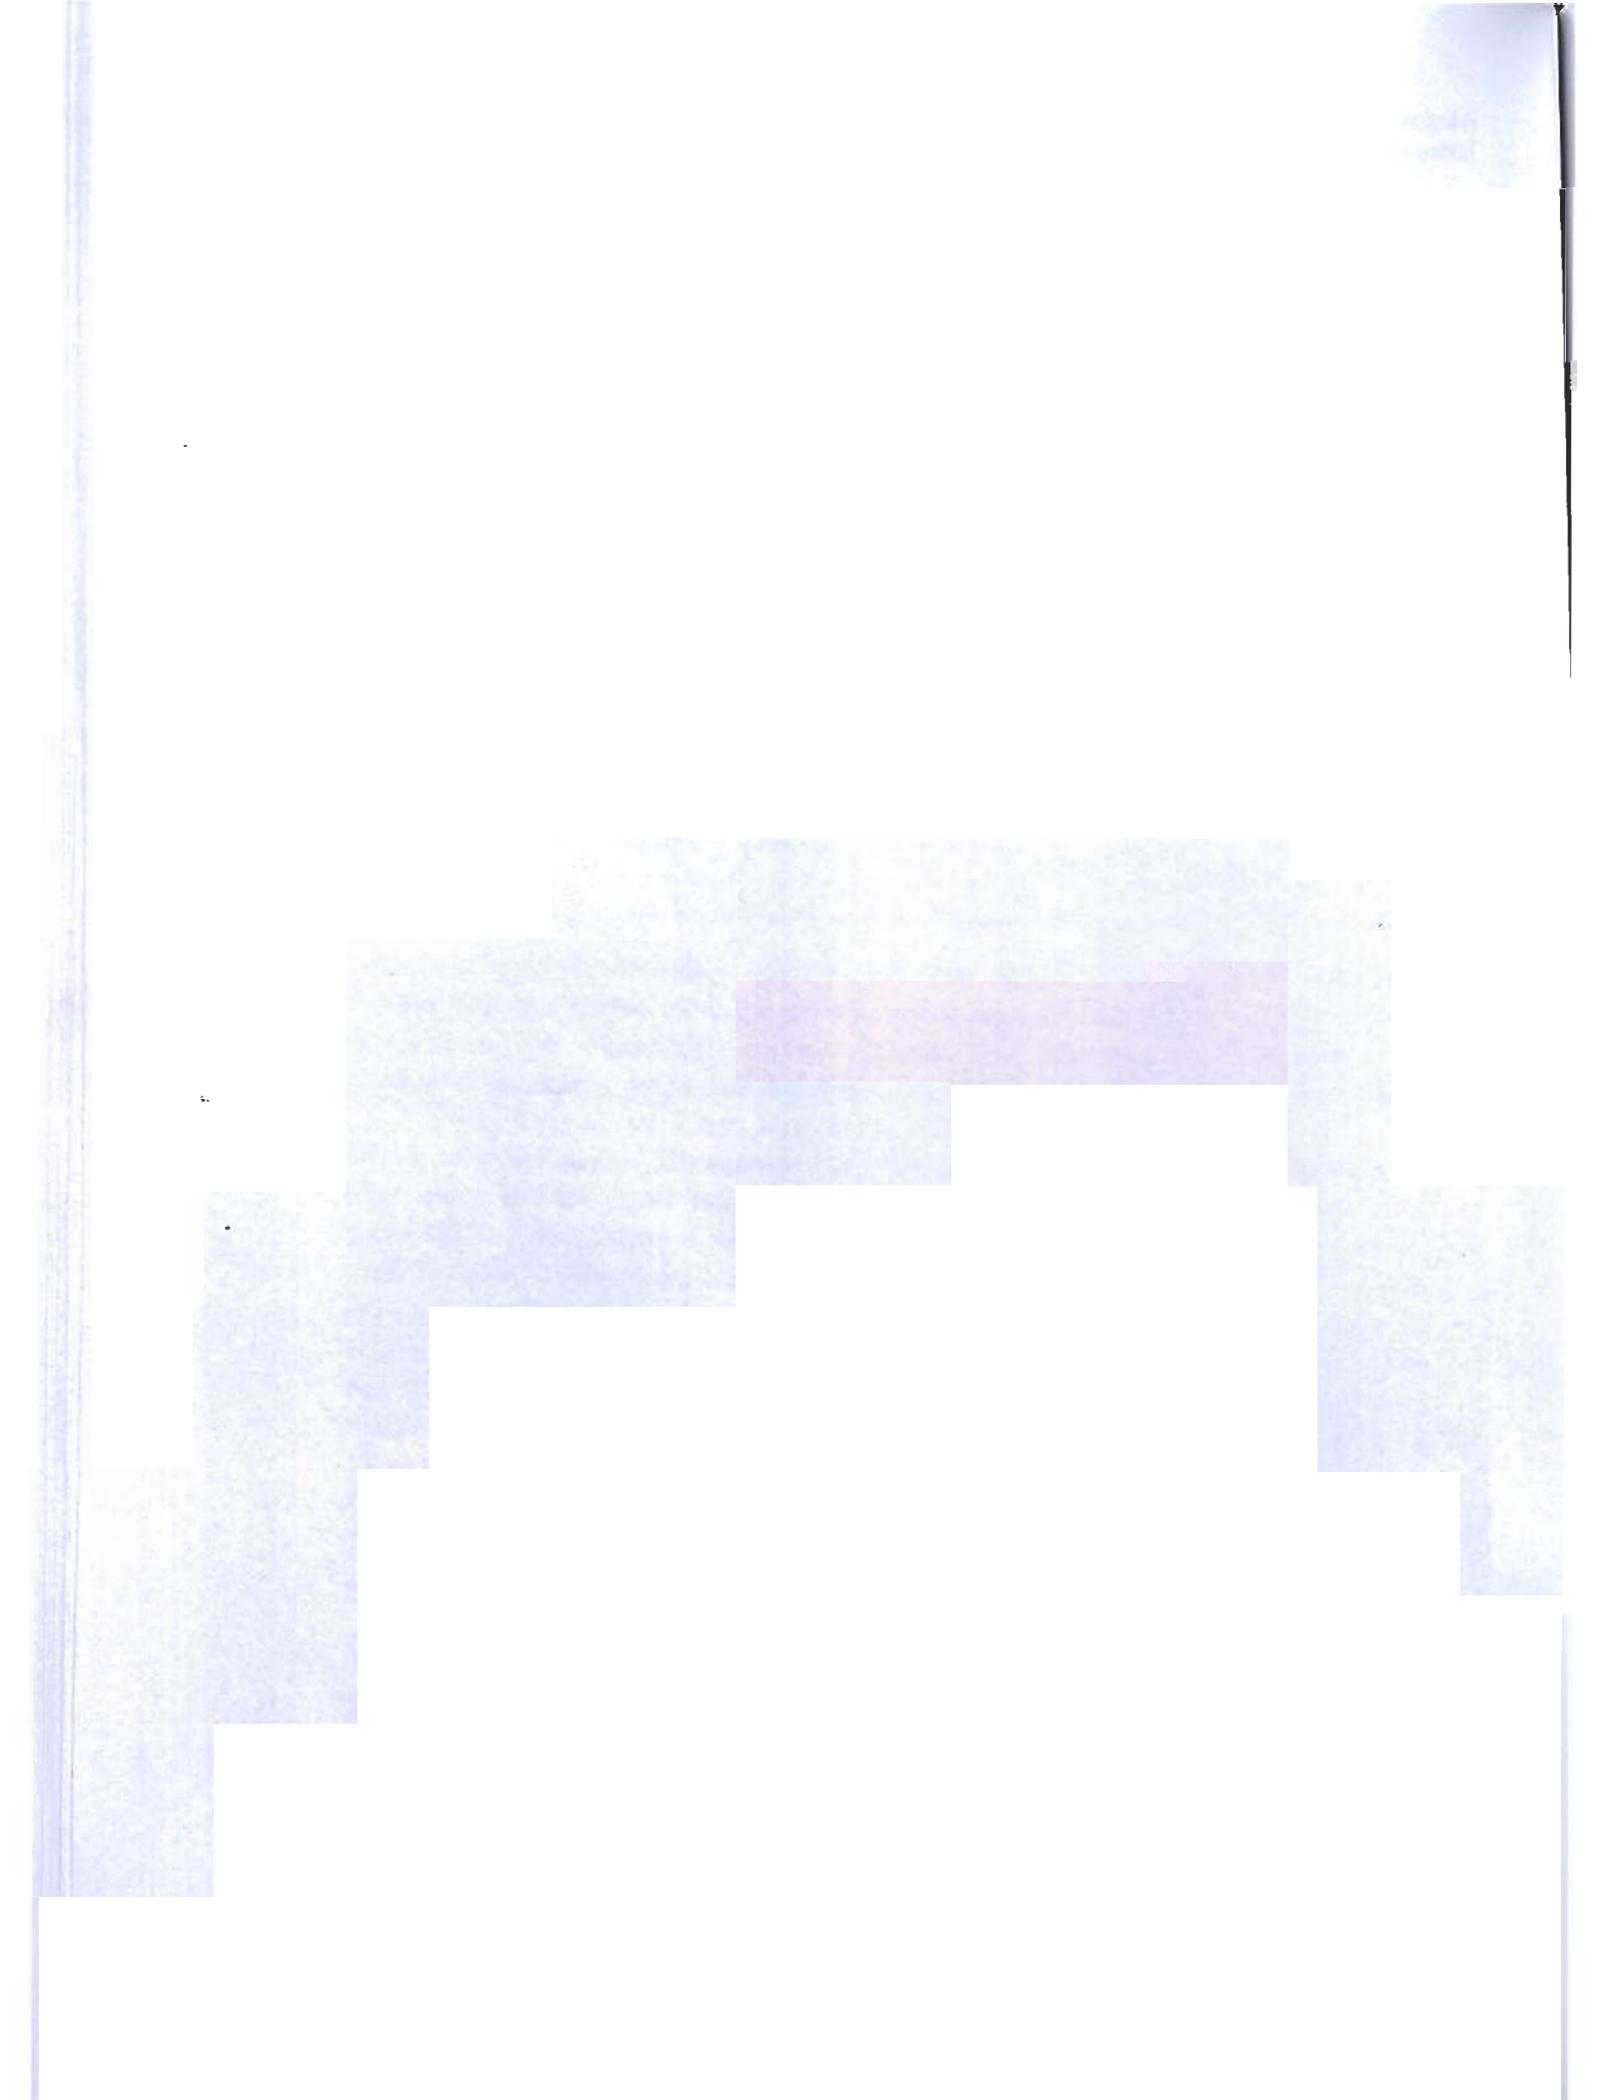

injection of radioactive wastes, although these wells would not be considered "deep" in the context of this alternative.

Quantitative Assessment of Technical Maturity

The technical maturity of the Immobilized and Direct Deep Borehole Disposition Alternatives were quantitatively evaluated by first decomposing the unit processing operations of each alternative according to the second-level processing flow diagrams and assigning an unweighted technical maturity level to each unit operation according to the 12-level maturity scale given in Table 2.3.1-1. This 12-level maturity scale was graded from the conceptual stage (level 1), laboratory feasibility testing (levels 2-4), prototype testing (5-10) to commercialization (levels 11-12).

Relative importance weights, graded on 3-level scale (0.1, 1, 10), were then applied to weight the technical maturity of each unit operation according to its importance to the viability of the alternative as a whole. The two weighted technical maturity measures for each Facility and the Alternative as a whole were computed on a 0-12 scale and a 0-1 scale according to the definitions given below from the weighted technical maturities of the operating units for each surface facility and the post-closure ES&H performance for the Direct Deep Borehole Disposition Alternative.

Technical Maturity of Alternative on 0-12 scale:

$$TM^{0-12} = [\sum (RIW_i \times TM_i)] / [\sum (RIW_i)] = Ad/Ac$$

Technical Maturity of Alternative on 0-1 scale:

$$TM^{0-1} = [\sum (RIW_i \times TM_i)] / [\sum (RIW_i)_{MAX}] = Ad/Bd$$

where, TM_i is the technical maturity, RIW_i is the relative importance weight, and $RIW_{i, MAX}$ is the maximum value of the relative importance weight (i.e., 10) of the i -th unit process. The summation is carried out over all of the unit processes. A, B, d and c refer to the rows and columns in Tables 2.3.1-2 and 2.3.1-3 where these values are computed.

The impact of post-closure ES&H performance (i.e., isolation of the disposed plutonium from the biosphere and criticality safety) on the technical viability of the two disposition alternatives was taken into account separately from the process of disposing of the plutonium by treating it as a yet another unit process. The relative importance weight assigned to post-closure performance was selected to yield a specified percentage contribution to the total score. By agreement across disposition alternatives, the pre-closure disposition operations and the post-closure performance are assigned relative importance weights of 0.75 and 0.25, respectively.

Table 2.3.1-1: Technical Maturity Scale for Disposition Alternatives

Value	Designation	Description
1	Conceptual	Basic principles of concept, function, and potential application have been proposed.
2	Lab-1	Some scientific investigations (calculations and/or experiments conducted)
3	Lab-2	Scientific investigations (calculations and/or experiments) currently underway.
4	Lab-3	Scientific feasibility demonstrated.
5	Prototype-1	A basic engineering system has been defined to implement technology principles, and to determine if the system can perform the function in the specific application of interest.
6	Prototype-2	Functions critical to the performance of the engineering system have been identified and verified with applicable computer codes and general experimental data.
7	Prototype-3	Design trade-offs for the engineering system have been identified to establish a reference design configuration. Initial collection of safety-related data is being performed. Existing technologies are available but have not been applied to this application..
8	Prototype-4	The system design is complete. The technology development process begins transition into a technology demonstration. Initiated data gathering to support licensing.
9	Prototype-5	The technology development process has progressed to integrated system demonstration. Collection of safety-related data is complete.
10	Prototype-6	A final design is approved or approval is pending with no outstanding issues of significance. An integrated system has been demonstrated at a scale relevant to the final application in the proper operating environment.
11	Commercial-1	A facility or process is operational or has been operational at the desired scale or throughput.
12	Commercial-2	A facility or process is operational and is available.

**Table 2.3.1-2: Weighted Technical Maturities of Subsystems/Processes
in the Immobilized Deep Borehole Disposition Alternative**

	IMMOBILIZED DISPOSITION SUBSYSTEM/PROCESS	Technical Maturity	Relative Importance Weight	Weighted Technical Maturity
	Disassembly, Conversion Sub-Facility			
1	Truck & CRT Loading/Unloading	11	0.1	1.1
2	Shipping/Receiving	11	0.1	1.1
3	Gas Sampling	11	1	11
4	Special Recovery	11	1	11
5	Pit Disassembly	7	1	7
6	Hydride/Dehydride	7	1	7
7	Oralloy Decontamination	10	1	10
8	Concentration	11	0.1	1.1
9	Denitration	7	0.1	0.7
10	Passivation Furnace	11	0.1	1.1
11	Fuel Decladding	11	1	11
12	Size Reduction	11	1	11
13	Halide Wash	9	1	9
14	Precipitation & Filtration	11	1	11
15	Pyrolysis & Calcination	6	1	6
16	Off-Gas Treatment	9	1	9
17	Interim D&C Front-End Storage	11	0.1	1.1
		b	c	d
A	Total Contribution to Score		12	109
B	Maximum Possible Score		170	139
C	TECHNICAL MATURITY (0-1) Ad/Bd			0.78
D	TECHNICAL MATURITY (0-12) Ad/Ac			9.4
	Immobilization Sub-Facility			
1	Immobilization Feed Preparation	3	1	3
2	Immobilization Calciner Feed Makeup	3	1	3
3	Immobilization Drying & Calcination	3	1	3
4	Immobilization Off-Gas Treatment	11	1	11
5	Immobilization Milling & Granulation	10	1	10
6	Immobilization Pellet Pressing	9	10	90
7	Immobilization Screening	11	0.1	1.1
8	Immobilization Crushing & Milling	11	1	11
9	Immobilization Sintering	7	10	70
10	Immobilization Inspection	11	1	11
11	Immobilization Pellet Coating	10	1	10
12	Immobilization Pellet Packaging for Transport	10	1	10
13	Interim D,C&I Facility Storage	11	1	11
14	Transport to Borehole Facility	11	1	11
		b	c	d
A	Total Contribution to Score		31	255
B	Maximum Possible Score		140	373
C	TECHNICAL MATURITY (0-1) Ad/Bd			0.68
D	TECHNICAL MATURITY (0-12) Ad/Ac			8.2

**Table 2.3.1-2: Weighted Technical Maturities of Subsystems/Processes
in the Immobilized Deep Borehole Disposition Alternative (Continued)**

	IMMOBILIZED DISPOSITION SUBSYSTEM/PROCESS	Technical Maturity	Relative Importance Weight	Weighted Technical Maturity
	Disassembly, Conversion & Immobilization Facility	b	c	d
A	Total Contribution to Score		43	364
B	Maximum Possible Score		310	512
C	TECHNICAL MATURITY (0-1) Ad/Bd			0.71
D	TECHNICAL MATURITY (0-12) Ad/Ac			8.5
	Deep Borehole Disposal Facility			
1	Security Inspection	11	1	11
2	Shipping Package Unloading	11	1	11
3	Pellet Container Unloading	11	1	11
4	SNM Accountability Confirmatory Measurements	7	10	70
5	Temporary Container Storage	11	1	11
6	Container Loading on On-Site Transporter	11	1	11
7	On-Site Pellet Container Transport	11	1	11
8	Pellet Transfer to Mixing Facility Feed Bins	11	1	11
9	Transfer to Pellet Feed Hopper	11	1	11
10	Dry Grout/non-Pu Pellet Material Storage	11	1	11
11	Dry Material Metering	11	1	11
12	Cement non-Pu Pellet-Grout Mixing	12	1	12
13	Pu- Pellet & non-Pu Pellet-Grout Mixing	7	10	70
14	Pellet-Grout Mix Transfer to Borehole	7	1	7
15	Pellet-Grout Mix Emplacement in Borehole	7	10	70
16	Emplacement Monitoring	7	1	7
17	Installing Undercut Seals	7	1	7
18	Installing Containment Zone Borehole Seal	7	10	70
19	Post-Closure Monitoring (Security & ES&H)	11	10	110
		b	c	d
A	Total Contribution to Score		64	533
B	Maximum Possible Score		190	768
C	TECHNICAL MATURITY (0-1) Ad/Bd			0.69
D	TECHNICAL MATURITY (0-12) Ad/Ac			8.3
	Post-Closure ES&H Performance			
	Post-Closure Performance Weight Ratio %		25	
	Total contribution to score		107	897.3
	Post-Closure ES&H	8	35.57	284.5
		b	c	d
	DEEP BOREHOLE ALTERNATIVE			
A	Total Contribution to Score		142	1182
B	Maximum Possible Score		500	1,707
C	TECHNICAL MATURITY (0-1) Ad/Bd			0.69
D	TECHNICAL MATURITY (0-12) Ad/Ac			8.3

for Deep Bore

Facilities & Alternati

ativity
(7 Scale)

DISPOSITION

Inte				9.4
Disa	Duration X	0		8.2
Disa	y	0		8.5
Post	nce	0		8.3
Inte	Post-closu	0		8.0
Inte	Post-closu	0		8.3
Disa	DISPOSITIC			8.1
Disa	ility	0.82		8.0
Deep Borehole		0.76		
Post-Closure E		0.50		
Direct Dispositi	weight	0.70		
Direct Dispositi	weight	0.57		

2.

cc
fo
ev
ha

not be until

these unknowns are represented in the Borehole R&D Plan submitted to the FMDP office or the Borehole Siting Guidance Report just completed and currently in review. Qualitatively, these unknowns are similar to those for disposal of spent MOX fuel or Pu immobilized as high-level radioactive waste, as a SNF/HLW repository has never been sited, fully characterized or licensed in this or any other country.

This immobilized borehole alternative differs somewhat from the direct borehole alternative in the area of technical unknowns. The extra cost of immobilizing plutonium is taken in part to give added assurance of long term isolation safety and a simplified licensing safety argument. Thus, this alternative is lower in uncertainty with respect to post-closure performance than the direct disposal alternative.

Technical risk follows from the primary uncertainties. This alternative would require many years into implementation before unexpected problems due to unanticipated underground conditions or processes would be discovered. This risk could be mitigated by early exploratory field studies to confirm or refute anticipated underground conditions and processes.

2.3.3 Assessment of Existing Regulatory Framework

Regulatory uncertainty is the largest single question remaining for borehole viability. This has been discussed in a Borehole Regulatory White Paper provided to LLNL to the FMDP office, in a Regulatory Plan prepared for the FMDP office by F. Daniel, and in the National Academy Reports on Pu disposition. The regulatory plan is being followed to interact with potential regulators to develop mutual agreement as to the viability of regulatory solutions to these uncertainties. Preliminary discussions with a variety of knowledgeable persons give both confidence and precedent that solutions indeed be developed given sufficient time, or a social and congressional mandate. Certain of these issues are qualitatively similar for most or all of the disposition alternatives.

Regulatory Framework

Because concentrated, separated fissile material in significant quantities has not been considered for direct disposition before, many current waste management regulations are not clearly appropriate for such a facility. This implies a need for new legislation to specify regulatory jurisdiction over any disposition activities for excess weapons usable fissile material. Development of a deep borehole facility would have its own unique regulatory uncertainties, primarily in the areas of siting, licensing and long term isolation and safety.

It is useful to consider the possible status of excess weapons-usable fissile material. Plutonium by itself is not either low-level waste (LLW) or high-level waste (HLW) as defined by regulation. It certainly is transuranic, but does not fit the conventional description of transuranic waste (TRU), which includes items that have

contaminated as a result of activities associated with the production of nuclear weapons such as rags, equipment, tools, contaminated sludges and residues. Significant quantities of concentrated plutonium also do not readily fit within the WIPP Waste Acceptance Criteria for TRU disposal. To meet the WIPP criteria, weapons usable plutonium would require dilution down into millions of barrels for emplacement as contact handled waste, or thousands of containers for remote handled waste which would consume much of the currently proposed capacity of the facility. This cursory analysis suggests that direct disposition of surplus fissile material might create a new category or sub-category of waste.

It has been noted that the congress, courts and regulatory bodies have shown willingness to act to specify jurisdiction and develop appropriate regulations to deal with safe disposition of nuclear materials. The Low Level Waste Policy Act of 1980, the Nuclear Waste Policy Act of 1987 and amendments in 1992, the WIPP Land Withdrawal Act and pending bills S.167 and HR1020 illustrate precedent for legislative action on nuclear material disposition issues. Regulations specific to HLW disposal, TRU disposal and even uranium mine tailing management have evolved. The DOE continues to move away from self regulation into compliance with regulation from NRC, EPA and other agencies. Because concentrated plutonium has never been considered waste and does not conform to definition or acceptance criteria for any waste form currently regulated, it is entirely appropriate to expect specific legislative and regulatory action to guide fissile material disposition.

Licensing and Siting

Licensing requirements are a key area for which there are no clearly applicable regulations for the deep borehole. Concentrated plutonium disposition forms meet neither the requirements for HLW or the normal criteria for TRU. It has been suggested that the HLW regulations of 10 CFR 60 Disposal of High-Level Wastes in Geologic Repositories could be used, but upon inspection there are significant mismatches both technically and legally between these regulations and the borehole facility mission which would preclude application of Part 60. For example, Part 60 includes provisions for subsystem performance requirements on waste packages and the engineered barrier system which are inappropriate for the safety argument for the borehole. Part 60 mandates a retrievability period which is inconsistent with the goal of timely disposition of weapons-usable materials. The time frames of various requirements of Part 60 are based on the radionuclide decay characteristics of spent nuclear fuel (SNF) and defense high-level waste (DHLW), which is inconsistent with the borehole disposition forms. Provisions of Part 60 pertain to manned access of require access to the operations area which is inconsistent with borehole emplacement. The licensing in Part 60 is actually several steps (following site characterization and selection per 10 CFR 960), an initial step of construction authorization followed by an operational authorization and later approval for final closure. This process acknowledges that much of the site specific data and long term performance confidence for the system will be obtained from the manned access and monitoring of the operational time period, and reflects the mandated

retrievability of the emplaced waste. These considerations do not apply to an unmined borehole concept with lack of retrievability as a desired feature. Thus one step licensing may be more appropriate for a borehole facility. Portions of Part 60 deal with thermal and radiation emissions from SNF and DHLW, which are inappropriate for plutonium. Portions of Part 60 dealing with criticality might be usable, but should be assessed in the safety context of the borehole concept. Finally, Part 60 was developed to assure safe storage of a much larger inventory of much more radioactive material in a facility much closer to the accessible environment than the borehole. Part 60 results from the Nuclear Waste Policy Act, which does not discuss excess weapons usable fissile material. In sum, it does not appear that 10 CFR 60 is directly appropriate for use in the context of a deep borehole disposition.

The licensing regulations for WIPP have also been suggested for use in the context of the borehole. Safety compliance criteria for WIPP (40 CFR 194) were developed to comply with 40 CFR 191 and are based on the WIPP acceptance criteria, which would not cover the weapons-usable disposition forms under consideration for a deep borehole unless they were partitioned and diluted. Further, the family of regulations was effectively customized in negotiating the land withdrawal act, a statute specific to the WIPP mission, waste forms and location in bedded salt.

Both the HLW repository and WIPP provide useful precedent that government legislation and regulations for licensing a plutonium disposition facility can and should be specifically developed for the mission. We observe that **each nuclear disposal type other than LLW** has resulted in legislation to specify jurisdiction and regulatory requirements for licensing and environmental protection. It is likely that much of the content and structure of the HLW and WIPP regulations would serve as useful guides in the development of regulations for a borehole facility, providing that the specific technical provisions were kept relevant to the mission and safety strategy for the borehole disposition facility.

Siting guidelines are another area of uncertainty. It has been suggested that siting suitability guidelines such as those of 10 CFR 960 for the HLW repository project might be useful guidance for borehole siting. However, it is important to note that **HLW guidance was developed specifically for a mined geologic repository with direct access for characterization, and for a facility for isolation of material posing a greater dose hazard than the excess fissile material and with specific system and subsystem performance requirements.** Many of the provisions of Part 960 are not appropriate for the borehole facility. The intent of the guidance, however, could be useful in formulating specific guidelines for siting and characterization of a borehole facility consistent with the performance strategy for that facility. The FMDP deep borehole disposition task has completed a study of potential site characteristics, the beneficial and adverse impacts which could result from these characteristics and existing capabilities for site characterization (*Heiken et al., August 1996*). The results from these preliminary studies should provide a basis for defining site selection guidelines in the future.

rence betwe

c Immobilization Fac in t PEIS is that t
period of the two sets o
&
y
Pa
eriod. In contrast, in fl

als at the rate oi
y processes 5 t
hput of the cu
imately double t

in processing
a Facility is
RIS

In addition to th

and how
Facility
fuels, or
sand, sl
Oxide-li
converte
progr
these
to th
disas

ies
on
for
als,
ss.
be
ton
of

le
le-
an

1000
1000
1000

1000
1000
1000

1000
1000
1000

1000
1000
1000

1000
1000
1000

1000
1000
1000

1000
1000
1000

1000
1000
1000

pres
nated
e faci
lon

ss

n Immobil
been replaced by
means. In addition t
infrastructure at two entire sites
emissions below those

Consequently,
significant improve
much shorter period
emissions estimates g

ont er
e the
n hu

, and separation c
nt size reduction
eliminated. Silver
vers which elimi
cess simplification

1995
5.13

total wastes ar

d p
Dia
ing
dic
nve

ation

issions: Modera
her toxic

lease:
ratio:

te
1 4
Co

- *Transuranic Wastes:* Transuranic wastes will be generated from operations, equipment decontamination, failed equipment and u wastes are treated onsite in a waste handling facility to form g waste. Treated transuranic waste products are packaged, assayed shipping to the Waste Isolation Pilot Plant (WIPP) for disposal.
- *Low-Level Wastes:* Low-level wastes generated from operatic treated by sorting, separation, concentration, and size reduction level waste products are surveyed and shipped to a shallow disposal.
- *Mixed Transuranic Wastes:* A small quantity of solid mixed gloves and leaded glovebox gloves from the waste handling fac during operations of the Disassembly, Conversion & Immob mixed waste is packaged and shipped to another DOE waste (e.g., INEL at Idaho) for temporary storage, pending final treatr
- *Mixed Low-Level Wastes:* Mixed wastes generated from the fac levels below the transuranic (TRU) waste level (100 nCi/g), mixed low-level wastes and will be treated in the same : transuranic wastes described in the previous section.
- *Hazardous Wastes:* Hazardous wastes will be generated from reagents for support activities and lubricants and oils for equipment. Hazardous wastes will be managed and hauled : facility offsite for treatment and disposal according to EPA RC
- *Nonhazardous (Sanitary) Wastes:* Nonhazardous sanitary liqu the facility are transferred to an onsite sanitary waste Nonhazardous solid wastes, such as domestic trash and office offsite municipal sanitary landfill for disposal.
- *Nonhazardous (Other) Wastes:* Other nonhazardous liquid facilities support operations (e.g., cooling tower and evap collected in a catch tank and sampled before being reclaimed release to the environment.

Wastes and Emissions During Construction

- *Emissions:* Land disturbance, vehicle traffic (for dust partic fuel and gas consumption (for chemical pollutants) emission construction activities.

- *Radioactive Wastes:* There may be radioactive wastes generated during construction of the Ceramic Immobilization Facility since the site is assumed to be an existing site.
- *Hazardous Wastes:* Hazardous wastes generated from construction activities, such as motor oil, lubricants, etc. for construction vehicles will be managed and hauled to commercial waste facility offsite for treatment and disposal according to EPA RCRA guidelines.
- *Nonhazardous Wastes:* Solid nonhazardous wastes generated from construction activities (e.g., construction debris and rock cuttings) are to be disposed of in a sanitary landfill. Liquid nonhazardous wastes are either treated with a portable sanitary treatment system or hauled to offsite facilities for treatment and disposal.

2.4.1.2 Accident Mitigation, Accident Scenarios and Accidental Releases

The Disassembly, Conversion & Immobilization Facility is a Hazard Category 1 facility as defined in *DOE-STD-1027-94*. As such, it **will require** a detailed safety analysis report and risk assessment under *DOE Order 5480.23*. This section provides a brief description of the accident categories and summarizes a preliminary set of accidents postulated for each category in a summary Table. The summary of each accident includes the following elements:

- An estimate of the frequency of the scenario based on engineering judgment because the design of the facility is not advanced enough to justify use of rigorous risk analysis techniques,
- An estimate of the amount of radioactive material at risk in the accident based on the block flow diagrams and the equipment lists,
- An estimate of the fraction of material at risk that becomes airborne in respirable form based on the information collected in *Walker, (1981)* and *NUREG-1320 (1988)*, and
- An estimate of the fraction of material airborne in respirable form that is removed by filtration of the ventilation system.

Based on these postulated accidents and on DOE and NRC guidance, the following systems, structures, and components (SSCs) in the Disassembly, Conversion & Immobilization Facility are assumed to be safety class items:

- Structures housing plutonium (per *DOE Order 6430.1A 1300-3.2* since collapsing or breaching these structures could result in an unconfined release of radioactivity with unacceptable consequences). The Plutonium Processing Building will be designed and constructed to withstand the forces of a Design Basis Earthquake (DBE) and all postulated facility accidents without building failure or significant cracking. Because

es is monitored continuously for airborne
ation is also monitored continuously for
y in the Zone 1 exhaust

. Loss o

storage

ge vault racks (DOE Or
produce a nuclear critical

- Other items
assure that
criticality
- Effluent m
en
- By
in

ig es
g and
and
643

m

1
th
th
fe
7
ig
lo
oc
ic
ni
t
w
er
38

accessible. Glove box ports for gloves will be welded into the glove box. Gloves will be made of a material appropriate to their usage, usually a lead-laminated rubber composite. Windows will be made of laminated safety glass with leaded glass installed on the outside as required. Window size will be minimized. All window seal gaskets will have a metal fire shield on the inside of the box to retard burnout and keep the window in place if the gasket is lost. Gloves and windows will be designed to be replaced without spreading contamination.

- The support structure of the boxes will be designed to meet Performance Category 1 seismic criteria. Glove box trains will be separated from each other and from conveyors by gravity operated fire dampers. Dampers separating the glove box lines from the conveyor system will be normally open. A heat sensing system (which will cause the breaking of a fusible link) will close the damper automatically in case of a fire.
- Plutonium storage and process containers, including tankage and piping, that are not contained in DBE resistant gloveboxes (Seismic Category I per *NRC Regulatory Guide 3.14*).
- Redundant fire water supplies and pumping capabilities (electric motor drivers with diesel back-up) will be installed to supply the automatic and manual fire protection systems located throughout the site. One supply and one set of pumps will be designed to meet DBE requirements. Appropriate types of fire protection systems will be installed to provide life safety, prevent large-loss fires, prevent production delay, ensure that fire does not cause an unacceptable on-site or off-site release of hazardous material that will threaten the public health and safety or the environment, and minimize the potential for the occurrence of a fire and related perils.
- Where potential for nuclear criticality exists, the design of the plant will include the basic controls for assuring nuclear criticality safety. Designs will satisfy the double contingency principle, i.e., 'process designs shall incorporate sufficient safety factors so that at least two unlikely, independent, and concurrent changes in process conditions must occur before a criticality accident is possible' from DOE 6430. 1B. Basic control methods for the prevention of nuclear criticality include: provision of safe geometry, engineered density and/or mass limitation, provision of fixed neutron absorbers, provision of soluble neutron absorbers, and use of administrative controls. Although geometric controls are used extensively wherever practical, there are cases where geometric control alone cannot practically provide assurance of criticality safety. In these cases, engineered controls can be used to control moderation, nuclear poisons, mass, and density.

Bounding Accident Categories

The accidents postulated for nuclear facilities can be divided into three categories depending on the accident initiator: natural phenomena events, external events, and

internal events. The following sections describe accidents in each of considered for this assessment. Table 2.4.1.2-1 summarizes the accident releases for Operational and Design Basis Accidents and Beyond Design Basis Accidents. More detailed descriptions of these accident scenarios for the Immobilized Deep Borehole Disposition Facility can be found in the PEIS Data Input *LLNL Report No. 18, 1995*).

Operational and Design Basis Accidents

In the Operational and Design Basis Accident category, natural events are considered applicable to the ceramic pellet immobilization facility. Design basis events are earthquakes, tornados and flooding. Other events such as volcanic activity or tidal waves are not considered likely to occur at the Immobilized Deep Borehole Disposition Facility site. Such events are addressed in the future if warranted by the site selected for the facility. Events in this category are events originating off-site. They are site specific and are not addressed at this stage of conceptual design. External events that will be addressed include aircraft hazards, hazards from nearby facilities (explosions, fires) and transportation hazards (explosives, chemicals). The internal event accident scenarios are: glovebox fire, glovebox criticality, calciner furnace ceramic can drop, pellet container breakage, dissolver spill, calciner product spill, and the loss of off-site power.

Beyond-Design-Basis Accidents

In the Beyond-Design-Basis category, only external and internal accidents are considered; natural phenomena are excluded. External accidents offsite are site-specific and are not considered at this stage of conceptual design. Internal design-basis external events will be addressed in the future. Internal accident scenarios are: sintering furnace explosion, uncontrolled chemical reaction, calciner criticality, plutonyl nitrate tank criticality and pellet storage criticality.

2.4.1.3 ES&H Consequences of Normal Operations

The consequences of normal operations at the Immobilized Deep Borehole Disposition Facility on safety and health of the environment are being evaluated to be able to assess the Deep Borehole Disposition Alternative against the ES&H criterion. The ES&H consequences and associated risks for the facility (as configured in the Draft PEIS) are given in the Draft PEIS.

dock fire
 Cabiner Feed Tank Criticality
 FuO₂ Can Run Over & Breached
 Ceramic Can Drop

ling

fissions	1 noble gases .25 halogens	1 noble gas .25 halogens
log Pn	5×10^{-4}	1.1×10^{-3}
10^{18} prompt fissions 7 pulses of 10^{17} fissions at 10 minute intervals	1 noble gas .25 halogen 5×10^{-4} salts	1 noble gas .25 halogen 5×10^{-17} salts

14

DBAs

Incredible
 Incredible

le
 le

its presented in the Draft PBIS can be directly applied.

Emissions From Normal Operations and Construction

and Emissions During Normal Operations

The annual wastes and Disposal Facility are estimated operation schedule is assumed.

operation of the Deep Borehole Disposal Facility. A 10-year emplacement

- *Chemical Emissions:* The Borehole Disposal Facility

- *High-Level Wastes:* There is no high-level radioactive waste generated from operation of the Deep Borehole Disposal Facility.
- *Transuranic Wastes:* Transuranic wastes will be generated from process and facility operations, equipment decontamination, failed equipment and used tools. Transuranic wastes are treated on-site in a waste handling facility to form grout or compact solid waste. Treated transuranic waste products are packaged, assayed, and certified prior to shipping to the Waste Isolation Pilot Plant (WIPP) for disposal.
- *Low-Level Wastes:* Low-level wastes generated from operations of the Deep Borehole Disposal Facility are treated with sorting, separation, concentration, and size reduction processes. Final low-level waste products are converted to solid form, surveyed for radioactivity, and shipped to a shallow land burial site for disposal.
- *Mixed Transuranic Wastes:* A small quantity of solid mixed waste, mainly rubber gloves and leaded box-gloves in the waste handling facility, will be generated from operation of the Deep Borehole Disposal Facility. The mixed waste is packaged and shipped to another DOE waste management facility (e.g., INEL at Idaho) for temporary storage, pending final treatment and disposal.
- *Mixed Low-Level Wastes:* Mixed wastes generated from the Deep Borehole Disposal Facility with radioactivity level below transuranic level (100 nCi/g) will be classified as mixed low-level wastes and will be treated in the same manner as the mixed transuranic wastes described above.
- *Hazardous Wastes:* Hazardous wastes will be generated from chemical makeup and reagents for support activities and lubricant for drilling and emplacement machinery. Hazardous wastes will be managed and hauled to commercial waste facility offsite for treatment and disposal according to EPA RCRA guidelines.
- *Nonhazardous (Sanitary) Wastes:* Non-hazardous sanitary liquid wastes generated in the Deep Borehole Disposal Facility are transferred to an on-site sanitary waste system for treatment. Non-hazardous solid wastes, such as domestic trash and office waste, are hauled to offsite municipal sanitary landfill for disposal.
- *Nonhazardous (Other) Wastes:* Other nonhazardous liquid wastes generated from facilities support operations (e.g., cooling tower and evaporator condensate) are collected in catch tank and sampled before reclaim for other recycle use or release to the environment. The combined waste from the drilling, emplacement operations consists of rock cuttings, bentonite and polymers used during drilling. These wastes will all end up in the mud pits. It is customary within the drilling industry to leave all of these wastes in the mud pits rather than ship them off site. After drilling is complete, the pits are generally filled up with earth and leveled. There is expected to

be no treatment of these wastes unless testing indicates otherwise. The rock cuttings are shown in the table only as a volume since the rock will vary in density.

Wastes And Emissions Generated During Construction

The estimated wastes and emissions generated during construction of the Deep Borehole Disposal Facility are given in the following sections. A 3-year construction schedule is assumed.

- ***Emissions:*** Land disturbance, vehicle traffic (for dust particulate pollutant) and the fuel and gas consumption (for chemical pollutants) emissions are generated during construction activities.
- ***Radioactive Wastes:*** There are no radioactive wastes generated during construction of the Deep Borehole Disposal Facility.
- ***Hazardous Wastes:*** Hazardous wastes generated from construction activities, such as motor oil, lubricant, and drilling fluid from vehicles and drilling machinery, will be managed and hauled to commercial waste facility offsite for treatment and disposal according to EPA RCRA guidelines.
- ***Nonhazardous Wastes:*** Solid nonhazardous wastes generated from construction activities, (e.g., construction debris and rock cuttings), are to be disposed of in a sanitary landfill. Liquid nonhazardous wastes are either treated with a portable sanitary treatment system or hauled to off-site for treatment and disposal.

2.4.2.2 Accident Mitigation, Accident Scenarios and Accidental Releases

The Deep Borehole Disposal Facility is a Hazard Category 1 facility as defined in *DOE-STD-1027-92*. As such, it will require a detailed safety analysis report and risk assessment under *DOE Order 5480.23* before the facility is licensed for operation. This section provides a brief description of the accident categories and summarizes a preliminary set of accidents postulated for each category in a summary Table. The summary of each accident includes the following elements:

- An estimate of the frequency of the scenario based on engineering judgment because the design of the Deep Borehole Disposal Facility is not advanced enough to justify use of rigorous risk analysis techniques,
- An estimate of the amount of radioactive material at risk in the accident based on the block flow diagrams and the equipment lists,
- An estimate of the fraction of material at risk that becomes airborne in respirable form based on the information collected in Walker, (1981) and NUREG-1320 (1988), and

- An estimate of the fraction of material airborne in respirable form that is removed by filtration of the ventilation system.

The accident scenarios considered in this analysis are postulated for the Pre-Closure operational phase of the deep borehole facility operation. The Post-Closure phase requires long-term performance analyses that require a program of research to develop the necessary information. Therefore, this analysis is deferred to a future study. The quantitative full-scope risk assessment using system models for the Pre-Closure phase will be performed along with the SAR preparation stage in the development and design of the facility.

Based on these postulated accidents and on DOE and NRC guidance, the following systems, structures, and components (SSCs) in the Deep Borehole Disposal Facility are assumed to be safety class items:

- Structures housing **plutonium** (per *DOE Order 6430.1A 1300-3.2* since collapsing or breaching these structures could result in an unconfined release of radioactivity with unacceptable consequences)
- Ventilation system(s) required to maintain confinement following an accident (per *DOE 6430.1A 1300-3.2* since loss of confinement could result in an unmitigated release of radioactive material and per *DOE 6430.1A 1300-7.2* which requires that at least one confinement system be designed to withstand the effects of severe natural phenomena and man made events)
- Plutonium pellet drum storage vault racks (*DOE Order 6430.1A* since collapse of these storage racks could produce a nuclear criticality accident)
- Other items required for criticality safety including monitoring equipment required to assure that plutonium and nuclear poison concentrations are within limits and the criticality alarm system (*DOE Order 6430.1A 1300-3.2*)
- Effluent monitoring equipment required to assess releases of radioactivity to the environment during and following a DBA (*DOE Order 6430.1A 1300-3.2*)
- Emergency power and uninterruptible power supply systems will be provided (as required for the SSCs to perform their safety functions per *DOE 6430.1A 1330-3.2*).
- The Deep Borehole Disposition Facility will be sited at a geologic location with low seismicity (Seismic Zone 1 according to the Uniform Building Code with a maximum acceleration level of 0.075g). Process equipment will be fastened by bolt or tied down to reduce earthquake damage. Activity released is removed by HEPA filters.
- Tornado dampers will be installed in the surface processing building and the process building will be constructed to meet the safety criteria in *DOE-STD-1020-94*.
- The surface process building will be constructed above the flood line to preclude flooding in plutonium storage and process area in accordance with *DOE-STD-1020-94*.

- Low seal stress is maintained in the storage container to minimize the occurrence of breakage. Ventilation system is isolate and monitored for plutonium contamination. Activity released is removed by HEPA filters.
- The ceramic pellet containers will be designed to survive accidents. Administrative procedure controls will be established for extremely careful container handling to reduce the likelihood of this kind of accident. Radioactive materials released are removed by HEPA filters.
- The ceramic pellet shipping package will be designed with double container for transportation accidents.
- Facility design will include fire suppression system and fire isolation barriers in the process areas. Minimum quantity of combustible material in the process areas will be maintained by administrative controls. Activity released is removed by HEPA filters.
- Process areas with high potential of spill will be plated with stainless steel for ease of decontamination and leak proofing. Activity released is removed by HEPA filters.
- Procedure and control interlocks will be implemented to prevent grout mix spill accidents. Floor and wall in grout mixing process area will be lined with stainless steel for ease of decontamination and leak proofing. Activity released is removed by HEPA filters.
- Procedure and control interlocks will be implemented to prevent contamination due to loss of ventilation blowers. The floor and wall in the grout mixing process area will be lined with stainless steel for ease of decontamination and leak proofing. Activity released is removed by HEPA filters.
- Facility will be designed with emergency diesel generators and uninterruptible power system (UPS) for safety critical system controls and operations.
- A bucket could be dropped by the crane as a result of major structural failure or operator error. A free falling bucket/delivery pipe could get stuck and/or rupture in the isolation zone of the borehole. Appropriate design safety factors, single point fail-safe hoists, stringent QA/QC fabrication procedures, dead-man systems, clutch-brake interlocks, periodic non-destructive testing and evaluation of critical components, and administrative safety procedures will be implemented to mitigate such accidents.
- Radioactivity released by the breakage of pellets accidentally released from too great a height within the borehole would be contained by a containment structure located at the entrance to the borehole at the surface. The radioactivity released would be removed by HEPA filters in the ventilation system of the containment structure.
- The plutonium concentration in the coated ceramic ceramic pellets has been specified at a level low enough to ensure that an accidental chain reaction would not cause a criticality accident under any dry and water saturated operational and accident condition. Furthermore, the tough non-plutonium loaded ceramic coating of the ceramic pellets provides a substantial primary containment barrier to the release of plutonium to the environment during pre-closure surface processing and borehole emplacement operations.

2. They
Extent
from
de (over)

1. 1. 1.

ontai
s cer
non

**Table 2.4.2.2-1: Summary of Design Basis Accident
Scenarios and Release Fractions**

Number	Accident Scenario	Accident Frequency ¹	Source Term at Risk	Respirable Fraction	Fraction Released
1	Earthquake	Extremely unlikely	5 kg Pu	10 ⁻⁷	10 ⁻¹³
2	Tornado	Extremely unlikely	N/A	No release	No release
3	Flood	Extremely unlikely	N/A	No release	No release
4	Pu storage container breakage	Unlikely, 10 ⁻⁵ /drum/year	5 kg Pu	10 ⁻⁷	10 ⁻¹⁵
5	Pu storage container breach	Unlikely 10 ⁻⁶ /handling	5 kg Pu	10 ⁻⁷	10 ⁻¹⁵
6	On-Site Pellet Transporter Accident	Unlikely, 1.6x10 ⁻⁶ /truck km	5 kg Pu	No release	No release
7	Pellet-Grout Mixing Process Facility Fire	Extremely Unlikely	5 kg Pu	10 ⁻⁷	10 ⁻¹³
8	Ceramic Pellet Spill	Unlikely	0.5 kg Pu	10 ⁻⁷	10 ⁻¹⁵
9	Pellet-Grout Mix Spill	Anticipated	0.5 kg Pu	6 x 10 ⁻⁶	6 x 10 ⁻¹⁴
10	Failure of Ventilation Blower	Anticipated 0.5/year	N/A	No release	No release
11	Loss of Electrical Power	Anticipated 1/year	N/A	No release	No release

¹ Corresponds to terminology defined in DOE-STD-3009-94.

<i>Descriptive Word</i>	<i>Annual Frequency</i>
Anticipated	10 ⁻¹ ≥ p > 10 ⁻²
Unlikely	10 ⁻² ≥ p > 10 ⁻⁴
Extremely Unlikely	10 ⁻⁴ ≥ p > 10 ⁻⁶
Beyond Extremely Unlikely	10 ⁻⁶ ≥ p

**Table 2.4.2.2-1: Summary of Design Basis Accident
Scenarios and Release Fractions (Continued)**

Number	Accident Scenario	Accident Frequency ¹	Source Term at Risk	Respirable Fraction	Fraction Released
	BUCKET EMPLACEMENT:				
12	Bucket Dropped During Emplacement	Anticipated	834 kg Pu	6 x 10 ⁻⁷	6 x 10 ⁻¹³
13	Bucket Stuck in the Isolation Zone	Extremely Unlikely	834 kg Pu	No Release	No Release
14	Bucket Stuck in Emplacement Zone	Extremely Unlikely	834 kg Pu	No Release	No Release
15	Failure of Release - Fails to Open	Extremely Unlikely	834 kg Pu	No Release	No Release
16	Failure of Release - Opens Early	Extremely Unlikely	834 kg Pu	3 x 10 ⁻⁶	3 x 10 ⁻¹²
17	Pellet-Grout Sets in Bucket	Extremely Unlikely	834 kg Pu	No Release	No Release
18	Mixing System Breaks Pellets	Extremely Unlikely	834 kg Pu	6 x 10 ⁻⁸	6 x 10 ⁻¹⁴
19	Pellets Break During Release	Unlikely	834 kg Pu	6 x 10 ⁻⁸	6 x 10 ⁻¹⁴
20	Emplacement Facility Fire - Combustibles	Extremely Unlikely	834 kg Pu	No Release	No Release
21	Emplacement Facility Fire - Electrical	Extremely Unlikely	834 kg Pu	No Release	No Release
22	Loss of Electrical Power	Anticipated	N/A	No Release	No Release
	PUMPED EMPLACEMENT:				
23	Rupture of Delivery Pipe	Extremely Unlikely	100 kg Pu	3 x 10 ⁻⁶	3 x 10 ⁻¹²
24	Pellet-Grout Solidifies in Delivery Pipe	Unlikely	100 kg Pu	No Release	No Release
25	Delivery Pipe Dropped	Extremely Unlikely	100 kg Pu	6 x 10 ⁻⁷	6 x 10 ⁻¹³
26	Delivery Pipe Stuck in the Borehole	Beyond Extremely Unlikely	100 kg Pu	No Release	No Release
27	Mixing System Breaks Pellets	Unlikely	100 kg Pu	6 x 10 ⁻⁸	6 x 10 ⁻¹⁴
28	Pellets Break During Release	Unlikely	100 kg Pu	6 x 10 ⁻⁸	6 x 10 ⁻¹⁴
29	Emplacement Facility Fire - Combustibles	Extremely Unlikely	100 kg Pu	No Release	No Release
30	Emplacement Facility Fire - Electrical	Extremely Unlikely	100 kg Pu	No Release	No Release
31	Loss of Electrical Power	Anticipated	N/A	No Release	No Release

¹ Corresponds to terminology defined in DOE-STD-3009-94

<i>Descriptive Word</i>	<i>Annual Frequency</i>
Anticipated	10 ⁻¹ ≥ p > 10 ⁻²
Unlikely	10 ⁻² ≥ p > 10 ⁻⁴
Extremely Unlikely	10 ⁻⁴ ≥ p > 10 ⁻⁶
Beyond Extremely Unlikely	10 ⁻⁶ ≥ p

Beyond Design Basis Accidents

In the Beyond-Design-Basis category, only external and internal event initiated accidents are considered; natural phenomena are excluded. External events originating offsite are site-specific and are not considered at this stage of conceptual design. Beyond-design-basis external events will be addressed in the future. Internal Events considered are: failure of ventilation filter, uncontrolled chemical reaction, pellet storage criticality, and pellet-grout mixing criticality.

Table 2.4.2.2-2: Summary of Beyond Design Basis Accident Scenarios and Release Fractions

Section	Accident Scenario	Accident Frequency ¹	Source Term at Risk	Respirable Fraction	Fraction Released
1	Failure of Ventilation Filter	Beyond Extremely Unlikely	0.5 kg Pu	6 x 10 ⁻⁶	6 x 10 ⁻¹²
2	Uncontrolled Chemical Reaction	Beyond Extremely Unlikely	5 kg Pu	10 ⁻⁶	10 ⁻¹²
3	Pellet Storage Criticality	Beyond Extremely Unlikely	10 ¹⁹ prompt fissions in 8 hrs noble gas and halogen fission products release	1 noble gas .25 halogen	1 noble gas .25 halogen
4	Pellet-Grout Mixing Criticality	Beyond Extremely Unlikely	10 ¹⁹ prompt fissions in 8 hrs noble gas and halogen fission products release	1 noble gas .25 halogen	1 noble gas .25 halogen

¹ Corresponds to terminology defined in DOE-STD-3009-94.

<i>Descriptive Word</i>	<i>Annual Frequency</i>
Anticipated	10 ⁻¹ ≥ p > 10 ⁻²
Unlikely	10 ⁻² ≥ p > 10 ⁻⁴
Extremely Unlikely	10 ⁻⁴ ≥ p > 10 ⁻⁶
Beyond Extremely Unlikely	10 ⁻⁶ ≥ p

2.4.2.3 ES&H Consequences of Normal Operations

The consequences of normal operations at the Deep Borehole Disposal Facility on safety and health of the environment and people must be evaluated to be able to assess the Deep Borehole Disposition Alternative against the ES&H criterion. The ES&H consequences and associated risks have been evaluated for this facility and are given in the the Draft PEIS..

2.4.2.4 ES&H Consequences of Accidents

The consequences of operational accidents at the Deep Borehole Disposal Facility on the safety and health of the environment and people must be evaluated to be able to assess the Deep Borehole Disposition Alternative against the ES&H criterion. The ES&H consequences and associated risks have been evaluated for this facility and are given in the the Draft PEIS.

2.5 COST OF THE DEEP BOREHOLE DISPOSITION ALTERNATIVE

The total undiscounted Life Cycle Cost of the Immobilized Deep Borehole Disposition Alternative is 3.6 \$B US dollars. The top-level breakdown of this total cost by facility and cost-phase is given in the following Table 2.5-1.

Table 2.5-1: Cost Summary for the Immobilized Deep Borehole Disposition Alternative

Cost \$M	Disassembly, Conversion & Immobilization	Deep Borehole Facility	Total End-to-End Alternative
Total Up-Front Cost	583	765	1,348
Total Operating Cost	1,509	717	2,226
Tot. Life Cycle Cost	2,092	1,482	3,574

This Deep Borehole Disposition Alternative represents the highest performing alternative (with respect to criticality safety, environmental safety and health, and process closure safeguards & security) of the deep borehole disposition alternatives that were considered. This substantial increase in the technical confidence and licensability of the deep borehole disposition alternative is gained at the expense of a 990 \$M (38%) increase in total life cycle cost above that of the Direct Deep Borehole Disposition Alternative.

General Approach to Cost Estimation

The approach to costing the Immobilized Deep Borehole Disposition Alternative is a life cycle cost (LCC) methodology. Costs are developed for the total overall project including initial R&D, licensing/permitting, design, construction, operation and decommissioning. These costs are then analyzed and plotted against the end-to-end alternative schedule to provide constant dollar cash flows which can then be discounted at the appropriate real discount rate. The two major figures-of-merit for each alternative are the following: 1) the constant dollar front end costs, that is, all life cycle costs prior to normal operation of each facility (this is what the Government must spend to develop, design, construct, and start-up a given facility), and 2) the total life cycle costs, which include all 'cradle to grave' project costs paid by the Government and include front-end costs, revenues (if any), recurring costs, and end-of-life costs.

A 'lump sum' constant dollar cost for each major facility was developed using a 'bottoms-up' approach. This 'bottoms-up' approach involves defining process sheets in sufficient detail such that major process operations are well identified. The list of major and supporting equipment is generated for each major process operation. Process operation data is developed for the items on this list and include batch process cycle time, manpower requirements per process cycle, installed equipment

to from

onstan

t end costs, recurring

Schedule consid
e lump sum co
baseline schedu

Immobiliz

Table 2.5.
Conversion & In
Since such an ope
we assume that a
Specific examples
involving the use
operati
recover

the major ope
on Facility whic
minated by the
cell operations
I recovery opera
nuclide spikes s
glove box and vent
nd would normally be combi

ig/rece
e cont
nd all

Such
the

ility sizing and cost estimates were outlined above and are based on the costs are those for the specific operations that can be performed in a standard Pu processing facility (e.g., glovebox operations). Post commissioning costs based on the anticipated throughput and are costed at \$1.5/W. Table 2.5.1-2 shows

Immobilization F

e. Waste
U wa
Disas

ed

ment

onal)

SUB-TOTAL

SUP

TO

ance Labor 1,115

0

es 0

posal 44

18. Oversight

10

19. M&O Contract

23

ilities 12

270

ilities 0

35

24. Storage of P

Facilities 0

[Redacted]

time / total Pu processed	Borehole 1% Pu	lets: 0% Pu
start of Title I t		10.25 years
filling time		4 years

[Redacted]

Data source for cost information

The Deep Borehole Facility
The deep borehole facility
located centrally in the core

The estimates are made
of fissile material
The cost estimates
study and are
for these options,
construction with DWPF a

similar

The capital cost estimates are based on costs of major process equipment, process support systems, utility and service systems, plant buildings and site requirements. The method of estimating is based on the following:

- **Major Process systems:** equipment cost including cost per item plus factored cost of bulk materials (piping, etc.)
- **Process support systems:** equipment costs (where available), allowances or capacity and size multiplied by scaling factor
- **Utility and service systems:** capacity and size multiplied by scaling factor
- **Plant buildings (facilities):** pre-conceptual quantity takeoffs, HVAC, special features (lined cells, etc.) or \$/sq. ft or \$/cu. ft.

The capital cost estimate includes direct costs, indirect field costs, total field costs, contractors costs and profit, construction management, A-E cost, management costs, initial spares, and contingency. The operating cost estimates include operating and maintenance staffing costs, consumables, maintenance and spares, and waste handling and disposal costs. Table 2.5.2-2 shows the summary of the costs for Pu-loaded coated ceramic pellet disposal at the Deep Borehole Disposal Facility.

**Table 2.5.2-2: Life Cycle Cost Summary for the
Deep Borehole Disposal Facility**

COST ITEM DESCRIPTION	Cost \$M	COST BASIS
UP-FRONT COSTS:		
"PRE-OPERATIONAL " COSTS		
1. R&D	62	
2. NEPA Licensing & Permitting	75	
3. Conceptual Design	14	10% of Capital Construction Total
4. Site Screening, Selection & Characterization	237	
5. Performance Assessment	37	
6. Land Acquisition	5	
7. Q/A, site qualification, S&S	3	
8. Post-Construction Startup	30	50% of Annual Operating Cost
9. Risk Contingency (From Uncertainty Anal.)	116	25% of (1 to 8)
SUB-TOTAL	579	
UP-FRONT "CAPITAL" COSTS		
10. Title I, II, III Engineering, Design & Inspection	26	22.5% of Capital Construction Cost
11. Capital Equipment	51	
12. Facility Construction	63	
13. Construction Management	8	6% of Capital Construction Cost
14. Initial Spares (Technology Dependent)	1	2% of Capital Equipment Cost
15. Allowance for Indeterminates (AFI)	0	
16. Risk contingency (From Uncertainty Anal.)	37	25% of (10 to 15)
SUB-TOTAL	187	
TOTAL UP-FRONT COST	765	
OPERATING COSTS (10 year operation)		
17. Operations & Maintenance Labor	321	Drilling, Processing & Emplacing
18. Consumables	241	
19. Maintenance and Spares	35	
20. Waste Handling & Disposal	2	
21. Oversight	6	1% annual operating costs (17 to 20)
22. M&O Contractor Fees	12	2% annual operating costs (17 to 20)
23. PLT to Local Communities	6	1% of (17 to 21)
24. D&D (At closure)	19	
25. Govt. Subsidies or Fees to Private Facilities	0	
26. Transportation of Pu Forms to Facility	75	
27. Storage of Pu at Existing 94-I Site Facility	0	
TOTAL OPERATING COSTS	717	
GRAND TOTAL LIFE CYCLE COST	1,482	

2.5.3 Deep Borehole Site Characterization Costs

The siting process is a key element in selecting a site with adequate long-term performance. The process consists of two phases. First, large geologically suitable areas are screened and a few sites selected that will be further characterized. Since it is difficult to prove a site acceptable without detailed work, unsuitable areas will be screened out through use of existing regional studies. Suitable remaining sites will be studied in more detail, using non-invasive techniques such as surface mapping, surface sample analysis, and geophysical surveys. The first phase is therefore an effort to locate areas likely to have favorable characteristics without disqualifiers.

When it is determined that there are no disqualifiers for a site, the second site-specific investigation phase is begun. It is expected that several candidate sites will be chosen. At each, a small diameter pilot corehole will be drilled. The core from the hole will be subjected to extensive laboratory testing. The hole itself will be geophysically logged and results tied into the surface geophysical surveys. Fluid analysis and hydrologic testing on the hole will determine if favorable isolation conditions are present. Drilling parameters will be measured and used to fine tune the drilling program for the emplacement holes if the site is chosen. Additional site data will be obtained as each large diameter emplacement hole is cored and drilled. Cross-hole hydrologic and geophysical testing will be performed on each additional hole, as well as the standard logging as performed on the pilot hole. These site-specific tests in this second phase are designed to determine if the rock mass has been functionally isolated for geologic timespans, and if the isolation can be maintained for long timescales. Details of the testing program for each phase are described below and the components of each activity are listed in Tables 2.5.3-1 and 2.5.3-2 together with the budget for each task.

1. **Site Screening:** Site screening will begin after the ROD and will continue for 2 years. Its purpose is to evaluate large geographic domains, and subsequently successively smaller and increasingly more suitable domains, for features favorable to the containment and isolation of weapons excess fissile materials. The process will consider the merits and shortcomings of domains against geologic and non-geologic guidelines that provide a reasonable basis for assessment. The result of evaluation will be a list of potentially acceptable sites.
2. **Site Selection:** Site Selection will begin 2 years after the ROD and will continue for approximately 2 years. The purpose of this activity is to collect and evaluate evidence required to support the nomination of a site as suitable for characterization. The source of information for this activity will include literature and related studies, exploratory boreholes, surface investigations, rock testing at repository conditions, and the extrapolation of regional data to estimate site-specific characteristics and conditions. Technical evaluations will provide additional bases for evaluating the ability of a site to meet the qualifying conditions of siting guidelines. The nomination of a site as suitable for characterization will be based on an environmental assessment as specified in the Nuclear Waste Policy Act Amended (NWPA). The bases and

28, s
appl
e ca
las
ry to
l m
he :

Use
...

with the
statement
decision

p
r...

l in the selection of the candidate site for development of su



rent

ta

erization

101

Cha
101

48

9.46

, 1996

Resources
Total

Income
by

11.44	11.44	10.79	
0.40	0.40	0.36	

						2.53
ffs		0.38	0.54			1.94
per						
2.21						
am						
importation						
Inv						
loc		0.61	1.70			
2.31		0.50	2.15			
ra						
2.31						
edi						
bur						
loc						
byc						
ectonics		0.61	0.87	0.87	0.78	3.13

The total annual cost for each major siting activity is given in Table 2.5.3-3. The total annual cost and the total cumulative cost of all siting activities are also given in this summary table.

Table 2.5.3-3: Total Siting Costs for the Deep Borehole Disposition Alternative (\$M)

Siting Activity	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	Total
Site Screening		1.17	1.56								2.73
Site Selection	0.00	0	53.61	15.48	0.37						69.46
Site Characterization						32.02	45.71	45.80	41.39	0.10	165.0
Total Annual Cost	0.00	1.17	55.16	15.48	0.37	32.02	45.71	45.80	41.39	0.10	
Total Cum. Cost	0.00	1.17	56.33	71.82	72.19	104.2	149.9	195.7	237.1	237.2	

2.5.4 Intersite Transportation Costs

Intersite transportation costs for the Immobilized Deep Borehole Disposition Alternative are given in Table 2.5.4-1. The equipment for handling the transportation packages at the Feed Source Facilities, Disassembly, Conversion & Immobilization Facility and the Deep Borehole Disposal Facility are considered to be facility capital costs and are not included in Table 2.5.4-1 as transportation costs. Furthermore, O&M staffing and maintenance/testing costs associated with these package handling activities are also considered to be facility costs. Approximately 10 FTEs will be required for this purpose during disposition operations.

Table 2.5.4-1: Intersite Transportation Costs for the Immobilized Deep Borehole Disposition Alternative (\$M)

Cost Category	Cost \$M
NEPA Licensing	3.3
Q/A Site Qualification	1.6
Capital ¹	14.4
O&M Staffing ²	18.9
Waste Handling/Disposal	1.5
D&D	8.6
SST Transportation	64.4
TOTAL	93.8

¹Handling equipment, and their maintenance/testing are facility costs.

²O&M Staffing for package handling is a facility cost.

2.5.5 Integrated R&D Program Costs

The Integrated R&D Program costs for the Immobilized Deep Borehole Disposition Alternative are given in Table 2.5.5-1 by Major Activity Area and

Table 2.5.5-1: Research & Development Program Costs for the Immobilized Deep Borehole Disposition Alternative (\$M)

R&D Program Element	1997 \$M	1998 \$M	1999 \$M	2000 \$M	2001 \$M	Total \$M
3. BOREHOLE DISPOSAL						
3.1 Performance Assessment	0.64	1.34	2.21	3.61	4.60	12.40
3.2 Site Characterization	0.52	1.05	2.04	5.24	5.82	14.67
3.3 Materials Characterization	0.52	1.16	2.27	3.49	3.38	10.83
3.4 Engineering and Operations	0.93	2.10	3.43	7.86	9.78	24.10
SUBTOTAL	2.62	5.65	9.95	20.20	23.58	62.00
5. IMMOBILIZATION						
5.4 Ceramics - Greenfield Site	1.35	1.80	1.80	1.35	1.35	7.66
SUBTOTAL	1.35	1.80	1.80	1.35	1.35	7.66
7. PIT DISASSEMBLY						
7.1 Disassembly	1.26	2.03	1.26	0.00	0.00	4.55
7.2 Adv. System for Pu Removal from Pits	0.72	0.95	0.72	0.00	0.00	2.39
7.4 Nondestructive Assay System	0.63	0.45	0.45	0.00	0.00	1.53
7.5 Oralloy Decontamination	0.47	0.77	0.68	0.00	0.00	1.93
7.6 Spent Part Declassification	0.45	0.27	0.27	0.00	0.00	0.99
SUBTOTAL	3.53	4.47	3.39	0.00	0.00	11.39
8. PLUTONIUM CONVERSION						
8.1 Separation	1.98	2.86	1.93	0.88	0.23	7.88
8.2 Stabilization	1.99	1.71	1.35	0.27	0.00	5.33
8.3 Conversion	0.36	0.99	1.35	0.54	0.00	3.24
8.4 Waste Management	0.81	1.96	2.43	1.36	0.81	7.38
SUBTOTAL	5.15	7.52	7.06	3.05	1.04	23.83
9. PLUTONIUM STORAGE						
9.1 Plutonium Storage Criteria	2.21	1.85	1.85	0.45	0.23	6.58
9.2 Safety Surveillance	4.29	2.68	1.42	0.00	0.00	8.39
9.3 Safety Analysis	0.59	0.68	0.68	0.00	0.00	1.94
SUBTOTAL	7.08	5.20	3.95	0.45	0.23	16.91
13. SAFEGUARDS & SECURITY						
13.1 System Effectiveness Evaluation	1.55	2.17	1.91	0.73	0.00	6.36
13.2 International Safeguards	1.32	1.90	1.13	0.79	0.75	5.89
13.3 Nuclear Materials Measurement Systems	1.01	0.75	0.23	0.00	0.00	1.98
SUBTOTAL	3.88	4.82	3.26	1.52	0.75	14.24
TOTAL ANNUAL R&D COST	23.62	29.46	29.42	26.58	26.94	136.02
TOTAL CUMULATIVE R&D COST	23.62	53.08	82.50	109.08	136.02	

Technology Sub-Area. The plan requires five years for completion (1997 - 2001 assuming ROD on December 1, 1996) and covers the major activity areas of Borehole Disposal, Pit Disassembly, Plutonium Conversion, Plutonium Immobilization and Safeguards and Security. The plan addresses only the R&D components of each of these areas; site selection, site characterization, performance assessment, materials characterization, engineering and operations, and safeguards and security activities that are not identified as R&D are separately budgeted. The R&D plan assumes that the siting process is a separate cost item not included in the plan. No sites are assumed for the technology demonstration tests. However, if a site is available, portions of the R&D plan costs will contribute towards site characterization costs. Although no full depth-full diameter borehole demonstration test will be performed prior to final site selection, the plan includes a full depth-narrow diameter borehole demonstration test for site characterization R&D and a partial depth-full diameter borehole demonstration test for drilling, emplacing and borehole sealing technology demonstration tests. The annual R&D plan cost breakdown is given in Table 2.5.5-1.

2.6 SCHEDULE

2.6.1 Schedule Overview

The preliminary nominal schedule to site, license, deploy, operate, and decommission/close an integrated system for the deep borehole disposal of surplus weapons Pu immobilized in ceramic pellets is presented in Figure 2.6.1-1. The schedule assumes a start date of January 1, 1997, which is consistent with the current December 1, 1996 scheduled date for the record of decision (ROD). Disposition in boreholes begins 10 years after the ROD in 2007, and continues for 10 years until the end of 2016. All activities at the site, including D&D, are completed by the end of 2018.

The schedules are divided into three time periods: Pre-Operational, Operational, and Post-Operational. **The Pre-Operational** period comprises all licensing and permitting activities necessary to operate the system, as well as research and development (R&D), site characterization, and facility design and construction of both the Disassembly, Conversion & Disassembly, Conversion & Immobilization Facility and the Deep Borehole surface processing/underground facility. The Operational period comprises the cold and hot operations of both the Disassembly, Conversion & Immobilization and of the Deep Borehole Disposal Facility. This period begins upon the commencement of cold operations in the Disassembly, Conversion & Immobilization Facility (9.5 years after ROD) and ends upon the completion of borehole emplacement operations (22 years after ROD). **The Post-Operational** period commences following the completion of hot operations at the Disassembly, Conversion & Immobilization Facility, and ends following complete decontamination and decommissioning (D&D), and closure of both the Disassembly, Conversion & Immobilization Facility and the Deep Borehole Disposal Facility.

**Table 2.6.1-1: Timeliness Measures for
Immobilized Deep Borehole Disposition**

Timeliness Measure	Years From Project Start (1/1/1997)	Date
Start Emplacement	10	1/1/07
End Emplacement	20	12/31/16
Seal Last Borehole	20.5	6/30/17
Close All Sites	22	12/31/18

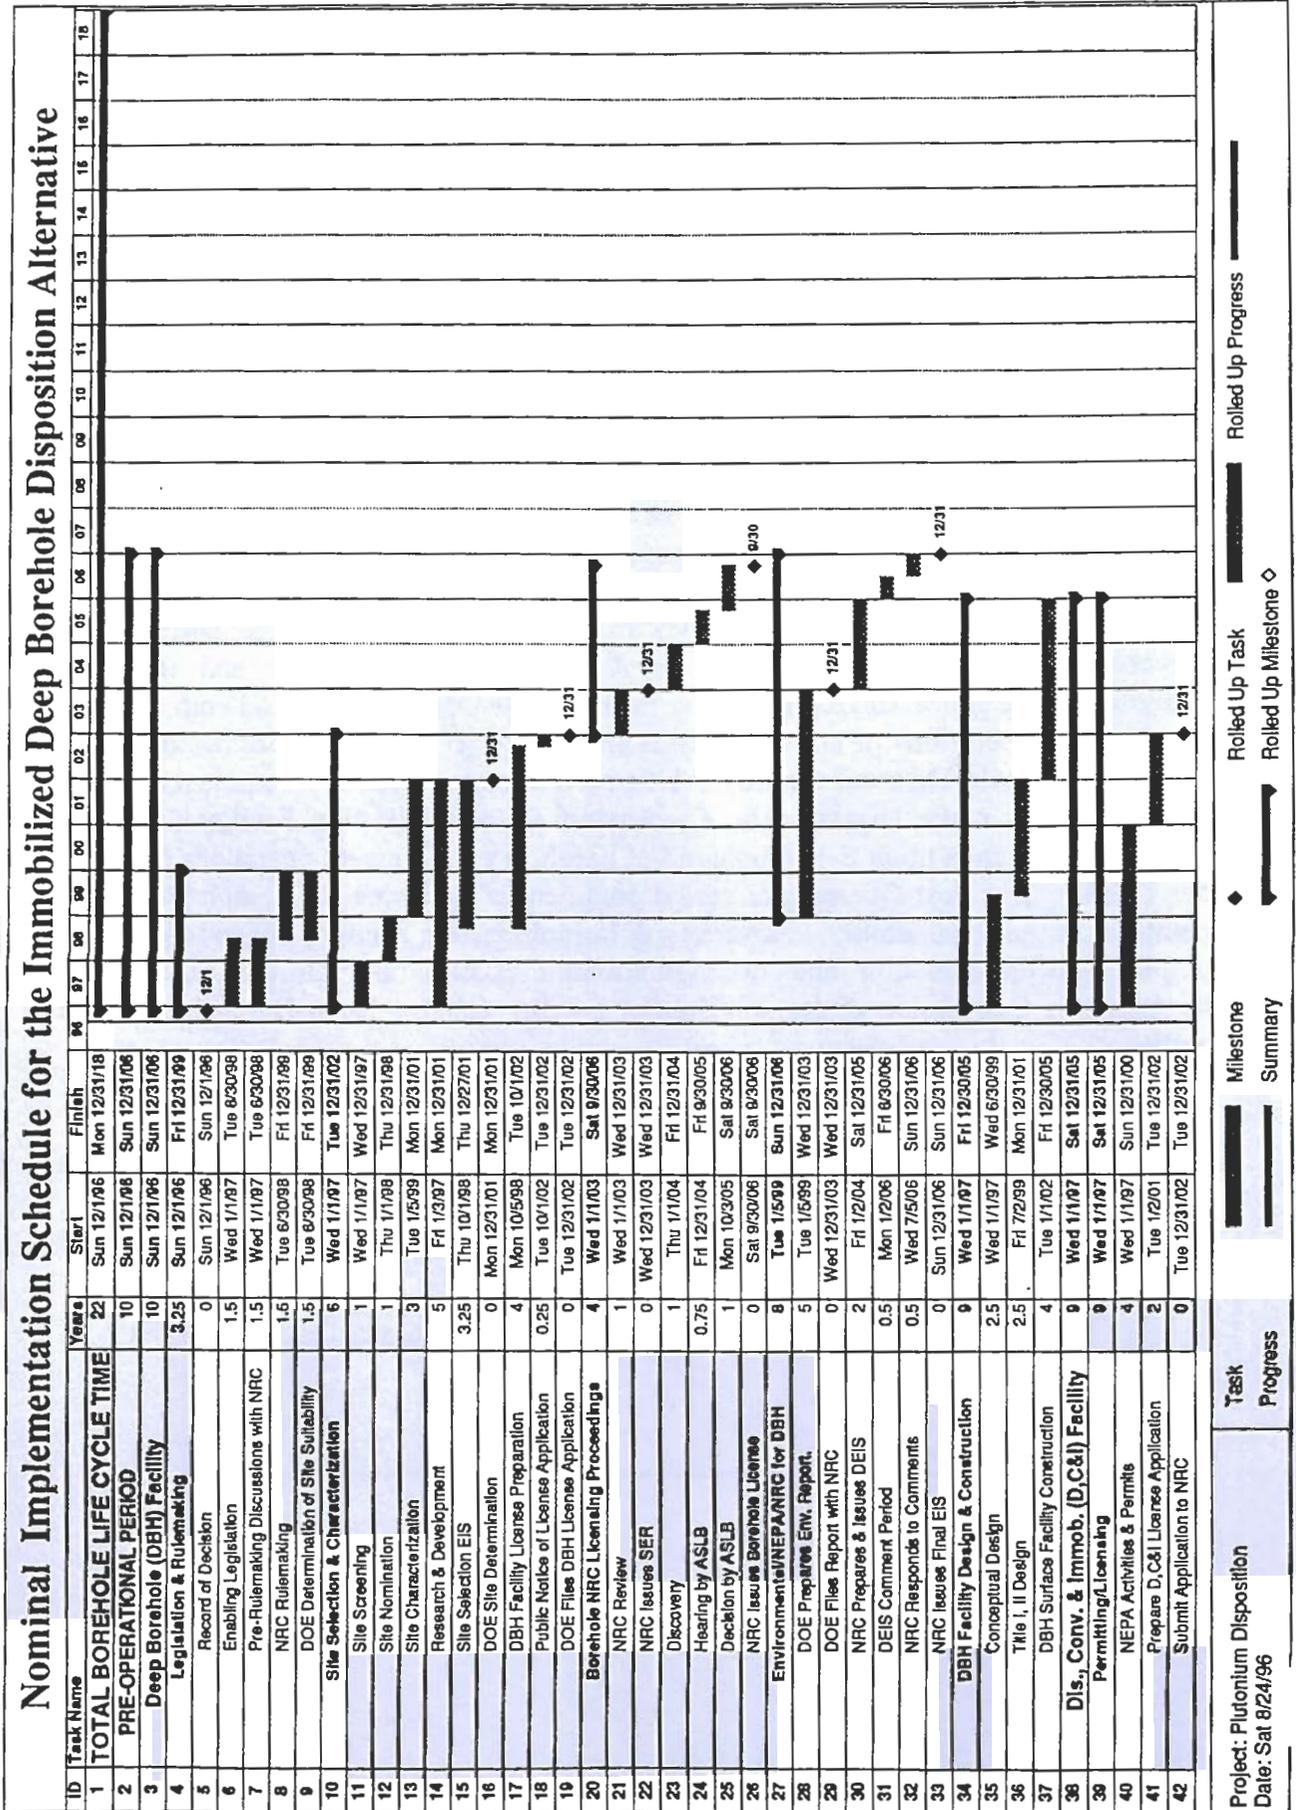


Figure 2.6.1-1: Nominal Implementation Schedule for the Immobilized Deep Borehole Disposition Alternative

Year	Project Name
2013	NSD Librarian
2014	NSD Grant Librarian

Augus

Year	Project Name
2014	NSD Grant Librarian

2014

Year	Project Name
2015	
2016	
2017	
2018	
2019	
2020	
2021	
2022	
2023	
2024	
2025	
2026	
2027	
2028	
2029	
2030	
2031	
2032	
2033	
2034	
2035	
2036	
2037	
2038	
2039	
2040	
2041	
2042	
2043	
2044	
2045	
2046	
2047	
2048	
2049	
2050	
2051	
2052	
2053	
2054	
2055	
2056	
2057	
2058	
2059	
2060	
2061	
2062	
2063	
2064	
2065	
2066	
2067	
2068	
2069	
2070	
2071	
2072	
2073	
2074	
2075	
2076	
2077	
2078	
2079	
2080	
2081	
2082	
2083	
2084	
2085	
2086	
2087	
2088	
2089	
2090	
2091	
2092	
2093	
2094	
2095	
2096	
2097	
2098	
2099	
2100	

Non-NSD

Year	Project Name
2015	NSD Facility Closure Complet
2016	NSD of D15 D1 Facility
2017	NSD of D24 Facility
2018	Post-employment Monitoring

is is a critical path activity
between the
and during
3, the NRC, and other inte
h legislative action is presun

0 B
a
k
out after rulemaking is complete. This activity falls on the critical path after
regulations have been established
characterization and determination
S
preparation of a
surface facilities

fac
app

ific res
d with
7 be ce
Pu.
on an
ital Impact
sities. The
al
or
re
al
se

The approach adopted here assumes that the DOE will characterize the selected site, and submit a single application to the NRC for permission to operate the borehole and surface facilities. Surface facility construction begins prior to the borehole license. (A separate application would be submitted for the construction and operation of the front-end/Disassembly, Conversion & Immobilization Facility. See Section 4.2.1. The NRC staff would review the application and issue a SER. The ASLB would subsequently hold formal hearings on the matter. Time is allowed for a period of site discovery prior to the hearings. After the hearings, the ASLB will deliberate and issue a license to operate. This sequence of events and activities lies on the critical path for the nominal case, which allows 4 years from the time DOE submits an application until the time the NRC issues the license.

- **Environmental/NEPA for Borehole:** It is assumed that a site-specific EIS will be prepared for the Deep Borehole Disposal Facility. The series of activities shown as starting with the development by the DOE of the necessary environmental data. This activity runs in parallel with site characterization (and Title I design, see below). This information is submitted to the NRC somewhat before the DOE submits the borehole license application. Following the issuance of the SER for the Borehole Disposal Facility by the NRC (see above), the NRC prepares and issues a draft EIS, which is made available for public comment. Additional time is set aside for the NRC to respond to comments and prepare the final EIS. These activities, though necessary and important, are not on the critical path for the nominal schedule.
- **Borehole Design and Surface Facility Construction:** Conceptual design of the Borehole Disposal Facilities begins immediately after the ROD. Once a site has been selected, Title I design begins, followed by Title II design (combined time of 3 years). The designs are complete in time for the DOE to incorporate them into the Deep Borehole Disposal Facility. Construction of the surface facilities begins after Title II design, and is completed 9 years after the ROD. None of these activities is on the critical path.
- **Disassembly, Conversion & Immobilization Facility Licensing, Design and Construction:** The schedule for the Disassembly, Conversion & Immobilization Facility given in this report is taken directly from, and is consistent with, the detailed schedule given in the Alternative Technical Summary Report for the Central Pellet Immobilization Alternative. No optimization of that schedule has been attempted here. This series of activities leading up to the cold startup of the Disassembly, Conversion & Immobilization Facility is on the critical path, and it is believed that the schedule presented for this case can be compressed. Note that in order to achieve an overall reduction in the time before borehole emplacement can begin, it is not sufficient to compress the schedule for the Disassembly, Conversion & Immobilization Facility alone; the sequence of activities leading up to the licensing of the Deep Borehole Disposal Facility must also be compressed in

initial li
also shorten the operational sched

licensing activities. An accelerated disposi
ears was cor
ROD and v

ement would
se in the overall time to complete disposition. Cost estimates have sh
ate increase in cost over the 10 year disposition case due primarily to the
throughput capacity of the Dis

Post-Operational Period

fact the
Facility
comple
which
into a l

ion
with t
sser
ing to t
obilizati
ivities a
nal activities do not impact the date at

lea
gin
&
ties

the

completion of the D&D activities. In reality, the length of the monitoring activity will likely be specified by the NRC/EPA and may continue for decades after all other activities at the site have ceased.

2.6.3 Scheduling Uncertainties

The schedule presented in this section is a logic network defined by activity durations and logical ties between them. As such, it lends itself to an examination of the impacts in schedule variations. At this stage of planning, however, such an analysis has not been done. In addition, each activity is associated with a cost. Costs and schedules are intimately related, and changes in one will invariably affect the other. Both cost and schedule can and should be optimized subject to programmatic and fiscal constraints. Such an optimization has not yet been done, but it offers the possibility of reducing both the cost and time associated with the budget and schedule presented here. Conversely, budgetary constraints not considered here could lead to significant delays in the schedule presented in this document.

The major uncertainty associated with the schedule shown in Figure 2.6.1-1 involves the licensing approach for the Deep Borehole Disposal Facility. In particular, it is assumed that a single license will be granted to operate the facility. The approach adopted here is deemed reasonable; however, it differs from the one specified in 10 CFR 60 governing the licensing of a mined geologic repository. In the case of a repository, the DOE must first obtain a license to construct the repository. Then, after the surface facilities and sufficient underground excavations have been constructed to allow the emplacement of an initial quantity of waste, the DOE must then seek a license to operate the repository. Such a process may be referred to as a 'two-step' licensing procedure. If a similar two-step licensing process were adopted by the NRC for the case of the Deep Borehole Disposal Facility, the Pre-Operational Period could be lengthened by as much as six years, which would result in a year-for-year increase in the time before hot emplacement operations can commence.

It is believed that a two-step licensing procedure, while appropriate for a mined geologic repository, offers no additional protection for the public in the case of a Deep Borehole Disposal Facility. In the case of a mined geologic repository, considerable mining and construction activity is needed to construct the initial drifts, shafts, etc. of the repository after site characterization is completed. In contrast, in the case of the underground portion of a Deep Borehole Disposal Facility, the final stage of site characterization would almost certainly be the emplacement to target depth of a large diameter borehole that would be used as the first emplacement hole. Thus, by the end of the characterization period, the construction of the subsurface portion of the Deep Borehole Disposal Facility would be 'substantially complete' as defined by 10 CFR 60.41.

In this connection, it should also be noted that at the time of this writing, both Congressional and NRC actions are being contemplated that would change the procedure

for licensing a geologic repository to a single-step process similar to the one assumed here for scheduling the Deep Borehole Disposition Alternative. It would appear that the process that has been outlined for the Deep Borehole Disposition Alternative is at least consistent with current regulatory and legislative thinking on licensing processes.

2.7 OTHER ISSUES

2.7.1 Benefits to Other Programs

Potential benefits to other programs would be seen for a custom designed disposition alternative, however a few points are noted:

- With development of a disposition facility specific for excess weapons material, other waste management programs would benefit and could benefit from the borehole disposition capacity. Disposal at a facility such as the Waste Isolation Pilot Plant (WIPP) would be asked to extend capacity to handle excess weapons material. The greater isolation offered by the borehole could pose less of a problem for problematic wastes intended for WIPP and simplify high-level radioactive waste (HLW) disposal at Yucca Mountain, or a follow-on second repository, if operational, licensing and capacity impacts and could be a benefit to the mission.
- With fielding of a deep borehole program, the technology for deep drilling, and deep resource exploitation could receive a boost.
- Successful disposition of excess plutonium in deep boreholes could lead to future disposal of other small volume, high isolation boreholes. This could include other high risk radionuclides or highly toxic materials.
- It is likely that borehole disposition could utilize personnel from the former underground weapons testing program. Ongoing beneficial use of these existing resources, in any way, those capabilities (staff, equipment, competence) and their emplacement and stemming) which might be needed for the program.

2.7.2 Cooperation with Russia

Based on interactions to date, Russian representatives have articulated a preference for Pu 'utilization' alternatives (e.g., deep boreholes). Yet, this does not preclude cooperation/collaboration in deep geologic disposal for the future.

- It is expected that both Russian and U.S. inventories could include materials which do not represent a viable 'utilization' alternative for this subset of the material inventory, deep borehole disposal offers sufficient promise to merit active cooperation in development.

- The borehole alternatives are the only ones (with the exception of the CANDU reactor option) independent of the federal waste management system. Cooperative work in this area with Russia could bolster the 'robustness' of the path forward for final disposition of surplus fissile materials.
- Contingent upon a national mandate to site and license a borehole facility, technical implementation of borehole disposition can be completed in a short time compared to many other alternatives. A rapid completion schedule for U.S. borehole disposition would provide an incentive for rapid Russian completion of a different, but comparably effective, 'utilization' disposition option.

2.7.3 Public and Institutional Acceptance

The principal public and institutional acceptance issues for this alternative (and the other deep borehole alternatives) are regulatory and licensing related. As with any of the disposition alternatives, local or regional opposition to the project will likely manifest itself in the regulatory and licensing process as well as other channels. The relative newness of the deep borehole concept may be a source of public and institutional concern and resistance. This will be partially, if not entirely, offset by the technical soundness and low risks of deep borehole disposition.

A borehole facility would be sited, developed and licensed in an open and public process. This would benefit greatly from a strong mandate for implementation. Such a mandate is possible based on the public consensus that elimination of large numbers of nuclear weapons in the U.S. and Russia is for the good of all mankind. There is considerable precedent for acceptance of otherwise undesirable facilities if they are clearly for the greater and common good. Seen as a key element in global disarmament, borehole disposition of weapon material could be a great opportunity, a peace initiative. Also, the inherent distinction of borehole disposition from commercial nuclear power activities and weapons testing and production is likely to be beneficial for public acceptance.

Deep borehole disposition complies with the national policy of geologic disposal of radioactive wastes and is consistent with international agreements on waste management.

3.0 OPPORTUNITIES FOR HYBRID ALTERNAT

Hybrid options have not been explicitly assessed at this possible pros and cons are speculative. However, the following alternatives exist and should be studied further:

- ***Feed Splitting Based on Feed Quality:*** Borehole disposition suited to hybrid options in combination with MOX fueled : excess plutonium is readily or economically convertible to option would have the 'good' material converted to oxide r with unsuitable isotopic or chemical composition, morpholog the borehole. This could eliminate costly processing of sma special processing requirements. Either borehole alternative hybrid. A variation of the direct borehole alternative might be many materials without processing, thus saving considerable c
- ***Dual Use of Fuel Pellet Fabrication Capabilities:*** The alternative could use the MOX fuel facility to produce sinte disposition and save immobilization facility costs, but would of the non-fuel-usable Pu to oxide first. The borehole facility the reduced capacity requirement by reducing borehole numb and by reducing the linear Pu loading factor which would isolation and criticality safety. The reactor facility would be with material which is economical to convert to fuel.

4.0 REFERENCES

- 10 CFR 60, *Disposal of High-Level Radioactive Wastes in G. Licensing Requirements*, Office of the Federal Register, National Records Administration (January 1, 1994).
- 10 CFR 71, *Packaging and Transportation of Radioactive Material*, Federal Register, National Archive and Records Administration, (January 1, 1994).
- 10 CFR 960, *General Guidelines for the Recommendation of Site Repositories*, (January, 1995).
- 40 CFR 191, Part II, *Environmental Radiation Protection Standards and Disposal of Spent Nuclear Fuel High Level and Transuranic Waste; Final Ruling*, Federal Register, Vol. 58, No. 242 (December 20, 1993).
- 49 CFR 171-180, *DOT Hazardous Material Regulations*, Office of Transportation Safety, National Archive and Records Administration, (October 1, 1994).
- DOE, *Draft Programmatic Environmental Impact Statement for Storage of Weapons-Usable Fissile Materials* (DOE/EIS-0229-D, February 1994).
- DOE, *Cost Estimate Guidelines for Advanced Nuclear Power Technology* (DOE/ET-0028, 10071/R3, Oak Ridge National Laboratory).
- DOE, *Technical Summary Report for Surplus Weapons-Usable Plutonium*, Office of Fissile Materials Disposition, US DOE, Rev 0, (July 1994).
- DOE/ET-0028, *Technology for Commercial Radioactive Waste Management*, US DOE Office of Waste Management (May, 1979).
- DOE Order 5480.23, *Nuclear Safety Analysis Reports*, USDOE (April 1994).
- DOE Order 5480.24, *Nuclear Criticality Safety*, USDOE (August 12, 1994).
- DOE Order 5481.1B, *Safety Analysis and Review Systems*, U.S. DOE (1986).
- DOE Order 5610.12, *Packaging and Off-Site Transportation of Nuclear Fuel Elements and Special Assemblies Associated with the Nuclear Explosives Safety Program*, US DOE (July 28, 1994).
- DOE Order 5630.11, *Safeguard and Security Program*, US DOE (January 1994).
- DOE Order 5632.1C, *Protection and Control of Safeguards and Security*, US DOE (15, 1994).



- DOE Order 5632.2A, *Physical Protection of Special Nuclear Material and Vital Equipment*, US DOE (February 9, 1988).
- DOE Order 5633.3A, *Control and Accountability of Nuclear Materials*, US DOE (February 3, 1988).
- DOE Order 5633.3B, *Control and Accountability of Nuclear Materials*, USDOE (September 7, 1994).
- DOE Order 5820.2A, *Radioactive Waste Management*, Office of Defense Waste and Transportation Management, U.S. Department of Energy, Washington, DC (1988).
- DOE Order 6430.1A *General Design Criteria Manual*, US DOE (May 6, 1989).
- DOE-STD-1027-94, *Hazard Categorization and Accident Analysis Techniques for Compliance with DOE ORDER 5480.23, Nuclear Safety Analysis Reports* (1994).
- DOE-STD-3005-YR (Proposal) *Evaluation Guidelines for Accident Analysis and Safety Structures, Systems, and Components* (February, 1994).
- DOE-STD-3009-94, *Preparation Guide for U.S. Dept. of Energy Non Reactor Nuclear Facility Safety Analysis Reports* (July, 1994).
- DOE-STD-3013-94, *Criteria for Safe Storage of Plutonium Metals and Oxides*, (December, 1994).
- Hickman, G.G., Wolk, G., and Morley, R., "Disposition of Excess Weapons Plutonium in Deep Boreholes: Site Selection Handbook," LA-13168-ms, Los Alamos National Laboratory, Los Alamos, NM, August 1996.
- IAEA *Safeguards Glossary*, IAEA/SG/INF/1 (Rev. 1), International Atomic Energy Agency, Vienna, Austria, (1987).
- IAEA *Safeguards Criteria 1991-1995*, Department of Safeguards, IAEA, Vienna, Austria, (November, 1990).
- LLNL, *Ceramic Immobilization Facility Using Coated Pellets without Radionuclides, PEIS Data Call Input Report*, Fissile Materials Disposition Program, Lawrence Livermore National Laboratory Report No. L-18833-07, (April 18, 1995).
- Mini-Pac Fissile Material Packaging Needs Assessment* [TTP No. OR139006(1)], Oak Ridge National Laboratory, (February 15, 1994).

National Academy of Sciences, *Management and Disposition of Excess Weapons Plutonium*, National Academic Press, Washington, D.C., 275 pp., (1994).

NUREG-1320, *Nuclear Fuel Cycle Facility Accident Analysis Handbook*, U.S. Nuclear Regulatory Commission (May, 1988).

NUREG-3.14, *Seismic Design Classification for Plutonium Processing and Fuel Fabrication Plants*, (October, 1973).

ORNL/TM-10071/R3, *DOE Cost Estimate Guidelines for Advanced Nuclear Power Technologies*, Oak Ridge National Laboratory.

Uniform Building Code, International Conference of Building Officials, Whittier, California, (1991).

Walker, E., *A Summary of Parameters Affecting the Release and Transport of Radioactive Material From an Unplanned Incident*, BNFO-81-2, Bechtel National Inc., (August, 1981).

Wijesinghe, Ananda M., et. al. "*Alternative Technical Summary Report for Immobilized Disposition in Deep Boreholes: Immobilized Disposal of Plutonium in Coated Ceramic Pellets in Grout Without Canisters*," Lawrence Livermore National Laboratory, Report No. UCRL-LR-121736, Version 4.0, (July 25, 1996a).

Wijesinghe, Ananda M., et. al. "*Alternative Technical Summary Report for Direct Disposition in Deep Boreholes: Direct Disposal of Plutonium Metal/ Plutonium Dioxide in Compound Canisters*," Lawrence Livermore National Laboratory, Report No. UCRL-LR-121737, Version 4.0, (July 25, 1996b).

Wijesinghe, Ananda M., et. al. "*Deep Borehole Disposal Facility PEIS Data Input Report: Immobilized Disposal of Coated Ceramic Pellets in Grout Without Canisters*," Lawrence Livermore National Laboratory, Report No. UCRL-LR-119735, Version 3.0, (January 15, 1996c).

Wijesinghe, Ananda M., et. al. "*Deep Borehole Disposal Facility PEIS Data Input Report: Direct Disposal of Plutonium Metal/Plutonium Dioxide in Compound Canisters*," Lawrence Livermore National Laboratory, Report No. UCRL-LR-119481, Version 3.0, (January 15, 1996d).

5.0 GLOSSARY

Special Terminology

Bentonite: A naturally occurring highly impermeable and chemically sorptive clay material that contains the swelling clay material smectite. It can also contain quartz, mica, feldspar, and calcite.

Borehole Array area: The Northern part of the Deep Borehole Disposal Facility occupied by the borehole array and including the Drilling and Emplacing-Borehole Sealing Facilities.

Calcination: The process of converting high-level waste to unconsolidated granules or powder. Calcined solid wastes are primarily salts and oxides of metals (heavy metals) and components of high-level wastes (also called calcining).

Calcine: Drying of liquids or other material at high temperature (approx. 800 °C) to drive off water and other volatile substances.

Casing: Steel pipe used to line the borehole to prevent an inflow of material or water and to prevent borehole cave-ins.

Cementing: The process of pumping a grout slurry either into the borehole or into the space between the borehole wall and the casing in borehole cementing operations.

Closure period: The period extending from the ending of the operation period to the completion of backfilling and sealing the deep boreholes and decontaminating, decommissioning of the facility as a whole, and making the facility ready to be placed on post-closure status.

Concrete: A mixture of cement, sand, water, sand ("fine aggregate") and 0.635 - 2.54 cm (0.25-1.0 in) diameter solid particles called the "coarse aggregate." Chemical additives such as water reducers, superplasticizers, swelling agents and materials such as silica fume and fly ash are often part of high-performance concrete formulations.

Construction period: The period extending from the beginning of construction activity to the commissioning of the deep borehole facility for acceptance of plutonium waste for disposal.

Disposal form: A generic term applied to the physical and chemical form in which the plutonium material is emplaced in the borehole. For example, this could be Pu metal or PuO₂ in metal containers or ceramic coated Pu-loaded ceramic pellets without containers.

Disposition option: Any one of a number of alternatives identified for burning in reactors or permanently disposing of weapons-usable excess fissile materials. These include geologic disposal in a mined geologic repository after immobilization in a

1998

1998

1998

1998

1998

1998

1998

1998

disposal form in combination with high-level nuclear waste, using as fuel in special reactors to partially convert to non-fissile fission products and disposing of the spent fuel in a mined geologic repository, and geologic disposal in a deep borehole without combining with radioactive waste.

Drilling Facility: One or more drilling units each consisting of a drill rig, associated mud and water pumps, cementing trucks, storage tanks, stand-by generator, mud-pits, personnel trailers etc. as shown in the Drilling Facility Plot Plan.

Emplacing-Borehole Sealing Facility: One or more disposal form emplacing and borehole sealing units consisting of a crane, ceramic pellet-grout mix emplacing units, cementing trucks, pumps, waste treatment plant and personnel trailers, etc. as shown in the Emplacing Facility Plot Plan.

Emplacement canister: A metal canister in which a disposal form is emplaced within the borehole in canistered disposal options. No canister is used in the ceramic pellet disposal form option addressed in this report.

Emplacement zone: The bottom part of a deep borehole (2 km) where the disposal form is emplaced.

Grout: Specially formulated cement/sand/water mixtures with chemical additives. Differs from concrete by the absence of coarse aggregate material. Used for hydraulic sealing of void spaces.

High-level nuclear waste: Highly radioactive fission products resulting from reactor operations and nuclear fuel reprocessing that has radioactivity exceeding certain regulatory radiation limits.

Isolation zone: The upper part of a deep borehole (2 km.) extending from the top of the emplacement zone to the ground surface used to seal and isolate the emplaced disposal form from the biosphere.

Main Facility: The Southern part of the Deep Borehole Disposal Facility that includes all facility buildings and storage areas excluding the Borehole Array in the Northern part. This includes the Surface Processing Facility, the Utility Support Facility, the Plant Waste Management Facility, the Central Warehouse, the Administration offices, Security, ES&H and Medical Centers, the Fire Station and the personnel services building.

Mud: The fluid used in the drilling process to counter balance subsurface fluid pressures, lubricate the drill string and bring cuttings to the surface. Often contains clays, oil, other additives and brine from the rock formation..

Operation period: The period extending from the commissioning of the facility for acceptance of plutonium waste for disposal to the emplacement of the final load of waste and termination of accepting plutonium waste for disposal.

hole

term used to refer to materi

. The sealant materials for each of these uses are
fine
, bei

late materials are bei
mixtures and other n

08.liter (55.gal) drum primary container

transportation p
disposal form :

ortation pack

pe

Acronyms

- ASL.G Atomic Safety Licensing B
- CCI on
- CR1 insp
- C/S illa
- DR4

DOT	Department of Transportation
DWPF	Defense Waste Processing Facility
EPA	Environmental Protection Agency
EPRI	Electric Power Research Institute
ES&H	Environmental Protection And Health
FM	Fissile Material
FMDP	Fissile Material Disposition Program
gal	Gallons
gpd	Gallons Per Day
gpm	Gallons Per Minute
HEPA	High Efficiency Particulate Air
HLW	High-Level Waste
HVAC	Heating, Ventilating and Air Conditioning
IAEA	International Atomic Energy Agency
INEL	Idaho National Engineering Laboratory
ISG	International Safeguards
kg	Kilogram (1000 grams)
km	Kilometer (1000 meters)
LA	Limited Area
LANL	Los Alamos National Laboratory
LCC	Life Cycle Cost
LLW	Low-Level Waste
LLNL	Lawrence Livermore National Laboratory
MAA	Material Access Area
MBA	Materials Balance Area
MC&A	Materials Control & Accountability
MOX	Mixed Oxides
MT	Metric Ton (1,000 kg)
MW	Mega Watt, Mixed Waste
NAS	National Academy of Sciences
NDA	Non-Destructive Assay
NEPA	National Environmental Protection Agency
NESHAP	National Emission Standards for Hazardous Air Pollutants
NFPA	National Fire Protection Association
NRC	Nuclear Regulatory Commission
NWPA	Nuclear Waste Policy Act
OPC	Pre-Operational Costs
ORNL	Oak Ridge National Laboratory
OSHA	Occupational Safety And Health Administration
PA	Protected Area
PCV	Primary Containment Vessel
PEIS	Programmatic Environmental Impact Statement
PIDAS	Perimeter Intrusion, Detection and Assessment System
PIV	Physical Inventory Verification
PPA	Property Protected Area

psia	Pounds Per Square Inch Absolute
QA/QC	Quality Assurance/Quality Control
RCRA	Resource Conservation And Recovery Act
ROD	Record of Decision
R&D	Research and Development
S&S	Safeguards And Security
scf	Standard Cubic Feet
scfm	Standard Cubic Feet Per Minute
SER	Safety Evaluation Report
SNF	Spent Nuclear Fuel
SNM	Special Nuclear Material
SQ	Significant Quantity (8 kg for Pu)
SS&C	Sand, Slag & Crucibles
SST	Safe Secure Transport
t	Tonne (1000 kg)
TRU	Transuranic Waste
UBC	Uniform Building Code
UPS	Uninterruptible Power Supply
VA	Vulnerability Assessment
WIPP	Waste Isolation Pilot Plant
yd ³	Cubic Yards
ZPPR	Stainless Steel Clad Metal and Oxide Fuel