

SECRET

WASH-1038

UNCLASSIFIED

MASTER

This document consists of 119 pages.

INTOUR DOCUMENT # SAC200117630000



AN INTRODUCTION TO NUCLEAR WEAPONS (u)

By
Samuel Glasstone

December 1962
[DTI Issuance Date]

University of California, Los Alamos Scientific Laboratory
and

University of California, Lawrence Radiation Laboratory, Livermore

DEPARTMENT OF ENERGY DECLASSIFICATION REVIEW	
1ST REVIEW DATE: 5/11/69	DETERMINATION (CIRCLE NUMBER(S))
AUTHORITY: DOE 5000	1. CLASSIFICATION RETAINED
NAME: Hel. Dinkley	2. CLASSIFICATION CHANGED TO:
2ND REVIEW DATE: 12/1/70	3. CONTAINS NO EOE CLASSIFIED INFO
AUTHORITY: AEC 101	4. COORDINATE WITH:
NAME: A. E. McNeill	5. CLASSIFICATION CANCELED
	6. CLASSIFIED INFO BRACKETED
	7. OTHER (SPECIFY) CHAPTERS 3 AND 8
	AND THE INDEX ARE DENIED IN THEIR ENTIRETY

RESTRICTED DATA

This document contains restricted data as defined in the Atomic Energy Act of 1954. Its transmittal or the disclosure of its contents in any manner to an unauthorized person is prohibited.

UNITED STATES ATOMIC ENERGY COMMISSION
Division of Technical Information

SECRET UNCLASSIFIED

cut 4

975A20C0001

~~TOP SECRET~~

UNCLASSIFIED

AN INTRODUCTION TO NUCLEAR WEAPONS

By

Samuel Glasstone

December 1962

University of California, Los Alamos Scientific Laboratory

and

University of California, Lawrence Radiation Laboratory, Livermore

~~TOP SECRET~~

RESTRICTED DATA

This document contains restricted data
concerning atomic energy which
is furnished for the exclusive use of
contractors and employees of the
personnel prohibited

~~TOP SECRET~~

UNCLASSIFIED


~~TOP SECRET~~

FOREWORD

While this document has been published as a Headquarters, U. S. Atomic Energy Commission publication, it has as its genesis two 1954 Los Alamos Scientific Laboratory reports identified as LAMS-1632 and LAMS-1633, titled "Weapons Activities of LASL." These publications are well known and used extensively by those interested in nuclear weapons as basic handbooks on the principles of nuclear weapons development and technology. Dr. Samuel Glasstone has revised and consolidated the above reports incorporating information furnished by the Los Alamos Scientific Laboratory, Lawrence Radiation Laboratory - Livermore, The Sandia Corporation, and the Defense Atomic Support Agency.

This document has been prepared solely for reference purposes on the principles of atomic weapons development and should not be considered as a technical guide for designing nuclear weapons.

Since this issue contains highly sensitive atomic weapons information of significance to our national defense and security, all viewers are enjoined to insure its proper security protection at all times.



A. W. Betts
Major General, USA
Director of Military Application
U. S. Atomic Energy Commission

UNCLASSIFIED

MM

CONTENTS

FOREWORD	4
ACKNOWLEDGMENT	6
CHAPTER 1 PRINCIPLES OF NUCLEAR ENERGY RELEASE	7
CHAPTER 2 THE FISSION PROCESS IN WEAPONS	27
CHAPTER 3 FISSION WEAPONS DEVELOPMENT	40
CHAPTER 4 IMPLOSION SYSTEMS	50
CHAPTER 5 THE NUCLEAR SYSTEM	75
CHAPTER 6 BOOSTING	88
CHAPTER 7 PRINCIPLES OF THERMONUCLEAR WEAPONS	96
CHAPTER 8 NUCLEAR WEAPONS TESTS	104
APPENDIX A ENERGY EQUIVALENTS	112
APPENDIX B EXPLOSIVE MATERIALS	112
INDEX	113

ACKNOWLEDGMENT

In preparing this report, I have received invaluable assistance from members of the Lawrence Radiation Laboratory (Livermore), Los Alamos Scientific Laboratory, Defense Atomic Support Agency (Headquarters and Field Command), the Sandia Corporation, and the AEC Division of Military Application. Unfortunately, it is not possible to list the names of all those individuals who contributed either by providing information or by reviewing the draft manuscript or both. However, I wish to acknowledge my great indebtedness to them, for without their help this report could not have been produced. My special thanks are due to Lawrence S. Germain for his effective coordination of the contributions from LRL, Livermore.

S. G.

CHAPTER 1

PRINCIPLES OF NUCLEAR ENERGY RELEASE

INTRODUCTION

Mass-Energy Equivalence

1.1 Any nuclear reaction in which there is a net decrease of mass, i.e., in which the total mass of the products is less than that of the interacting nuclei or nuclear particles, will be accompanied by a liberation of energy. The amount of energy released E (in ergs) is related to the net decrease of mass m (in grams) by the Einstein equation

$$E = mc^2 \quad (1.1)$$

where c is the velocity of light, i.e., 3.00×10^{10} cm/sec. In the study of nuclear reactions it is the common practice to state energies in electron volt (or ev) or million electron volt (Mev) units, 1 Mev being equivalent to 1.60×10^{-6} erg. Nuclear masses are generally expressed in atomic mass units (or amu), these being the masses on a scale in which the mass of the common isotope of carbon (C^{12}) is taken as precisely 12.0000. In terms of familiar mass units, 1 amu is 1.66×10^{-24} gram. Upon making the appropriate substitution into equation (1.1), it is found that

$$E(\text{Mev}) = 931 m (\text{amu}) \quad (1.2)$$

Consequently, the energy in Mev accompanying a nuclear reaction is equal to the decrease in mass in amu multiplied by 931.

Fission and Fusion

1.2 Two types of nuclear reactions, in which there is a decrease of mass, are used for the large-scale release of energy in weapons. These are (a) fission, i.e., the splitting of a heavy nucleus into a pair of lighter ones, and (b) fusion, i.e., the combination of two very light nuclei to form a somewhat heavier one. The underlying reason why these processes are accompanied by a liberation of energy (and decrease in mass) is that in each case the total energy of attraction (or binding energy) among the constituent protons and neutrons, i.e., the nucleons, is smaller in the initial nucleus (or nuclei) than it is in the products of the reaction. It is a fundamental law of nature that the rearrangement of a system from a weakly bound state to a more tightly bound state must be accompanied by a release of energy.

Binding Energy

1.3 The magnitude of the net attractive energy, i.e., the binding energy, of the nucleons in any nucleus can be calculated from the masses of various particles. Consider an atomic

RELEASE OF FISSION ENERGY

Calculation of Fission Energy

1.6 The most accurate method for determining the energy released in fission is from the known masses (in amu) of the nucleus undergoing fission and of the nuclei formed in the process. A simple, although less exact, procedure is the following. It will be seen shortly that fission of uranium-235, for example, can result from the absorption of a neutron, and in the process two lighter fission-product nuclei and two or three free neutrons are formed. The uranium-235 nucleus contains 235 nucleons and so the fission-product nuclei will have a total of $235 + 1 - 2$ (or 3), i.e., 234 (or 233) neutrons, depending upon whether two or three neutrons are released; the latter number will be used for the present calculation. In uranium-235, the mean binding energy per nucleon (Fig. 1.1) is about 7.6 Mev; hence, if the 235 nucleons which make up the uranium-235 nucleus were combined, the energy released would be given by

$$235 \text{ Nucleons} \rightarrow \text{Uranium-235} + (235 \times 7.6) \text{ Mev}$$

Nearly all the fission-product nuclei have mass numbers in the range from 95 to 140, and for such species Fig. 1.1 shows that the mean binding energy per nucleon is roughly 8.5 Mev. Consequently, the combination of the 233 nucleons to produce two fission-product nuclei can be represented by

$$233 \text{ Nucleons} \rightarrow \text{Two fission-product nuclei} + (233 \times 8.5) \text{ Mev}$$

Upon subtracting the two energy expressions, it is seen that

$$\text{Uranium-235} \rightarrow \text{Fission product nuclei} + (233 \times 8.5) - (235 \times 7.6) \text{ Mev}$$

The free neutrons absorbed and released in the fission process can be neglected in this calculation. Hence, the fission of a uranium-235 nucleus is accompanied by the release of $(233 \times 8.5) - (235 \times 7.6)$ Mev, i.e., about 200 Mev, of energy. The significance of this amount of energy in terms of more familiar units will be given below.

The Fission Process

1.7 The fission of heavy nuclei can be brought about in several different ways, but there is only one that is of importance for the practical release of nuclear energy. This is fission initiated by neutrons. The reason is that the fission process is always accompanied by the release of neutrons, which can produce fission in other nuclei. Hence, once fission by neutrons has been initiated in a quantity of material, a chain reaction, carried on by neutrons, is possible with the continuous release of energy. Only three nuclear species, namely, uranium-233, uranium-235, and plutonium-239, need be considered here for use in a fission chain process for two reasons. First, although these substances are radioactive and decay with the emission of alpha particles, they have relatively long half-lives and so are moderately stable.* All other fissile nuclides have such short half-lives and decay so rapidly that they have no practical value; in any event their strong radioactivity would make them difficult to handle. Second, of the relatively stable species, the three mentioned above are the only ones which will undergo fission as a result of the capture of neutrons of all energies, e.g., from less than an electron volt (slow neutrons) to millions of electron volts (fast neutrons).

1.8 The common isotope uranium-238, which constitutes about 99.3 percent of the element in nature, requires neutrons of about 1-Mev energy to cause fission at an appreciable

*The half-lives are as follows: uranium-233, 1.6×10^5 years; uranium-235, 7.1×10^8 years; plutonium-239, 2.4×10^4 years.



sion process, but the latter continue to be emitted for a few minutes. For uranium-235 fission, the prompt neutrons constitute 99.35 percent of the total fission neutrons and for plutonium-239 they represent nearly 99.8 percent. Because the time scale in nuclear explosions is very short, delayed neutrons play essentially no part in the fission chain reaction. In reactors for the controlled release of nuclear energy, however, these neutrons are of great significance.

Table 1.1—Neutrons Released per Fission

Nuclide	Neutron Energy		
	~0 Mev	0.5 Mev	14 Mev
Uranium-235	2.43	2.49	4.1
Plutonium-239	2.80	2.85	4.9
Uranium-233	2.45	2.51	4.2

Fission Energy

1.14 The rough estimate made earlier indicated that about 200 Mev of energy are produced per nucleus undergoing fission. More precise calculations, based on nuclear masses, and experimental measurements have shown that this is a good approximation for both uranium-235 and plutonium-239. The atomic mass in grams, i.e., 235 grams of uranium-235, contains 6.02×10^{23} nuclei, and the complete fission of this amount of uranium-235 would yield $6.02 \times 10^{23} \times 200 = 1.20 \times 10^{25}$ Mev or 1.93×10^{19} erg, since 1 Mev is equal to 1.60×10^{-6} erg. Making use of the fact that 1 calorie is equivalent to 4.18×10^7 ergs, it can be readily shown that complete fission of all the nuclei in 1 kilogram of fissile material would result in a total energy release of 2.0×10^{13} calories.

1.15 Only part of the energy of fission is immediately available in a nuclear explosion, since most of the radioactive decay energy of the fission products is released over a long period of time. It is usually accepted that about 90 percent of the fission energy contributes to the explosion, so that in a weapon the fission of 1 kilogram of material would produce explosive energy of about 1.8×10^{13} calories. The energy liberated in the explosion of 1 ton of TNT is taken to be 10^9 calories, and so 1 kilogram of fissile (or fissionable) material is equivalent in explosive power to 18,000 tons, i.e., 18 kilotons (or 18 kt), of TNT.* From these results it is readily found that complete fission of 0.056 kg (or 56 grams) or of 1.45×10^{23} nuclei of fissile material produces the equivalent of 1 kt of TNT of explosive energy. In other words, the energy per fission is 7.03×10^{-24} kt TNT equivalent. In stating the energy yields (or, in brief, the yields) of nuclear weapons, the basic unit, for very low yields, is the ton, with the kiloton (or 1,000 tons), i.e., 1 kt, and the megaton (or 1,000,000 tons), i.e., 1 Mt, of TNT equivalent being used for higher yields.

THE FISSION CHAIN REACTION

Condition for Chain Reaction: Critical Size

1.16 The condition for a self-sustaining fission chain reaction is that, on the average, the neutrons released in one act of fission shall cause (at least) one subsequent fission. Since the average number of neutrons produced in an act of fission is greater than two (see Table 1.1), it would appear, at first sight, that a chain reaction in uranium-235 or plutonium-239 would be inevitable. However, this is not so, because an appreciable proportion of the neutrons pro-

*In some calculations, the equivalent of 1 kg of uranium-235 is assumed to be 17 kt whereas for plutonium-239 it is 19 kt. The value 18 kt per kg is a good average for most fission weapons.



duced are lost in various ways. In a nuclear fission weapon, for example, an important source of loss is by leakage (or escape) of neutrons from the reacting material. Thus, many neutrons avoid being captured by a fissile nucleus by escaping from the system entirely. Some neutrons are also lost by parasitic capture, i.e., by capture in nonfission reactions of various kinds, either by the fissile species itself or by other nuclides which may be present.

1.17 The fraction of neutrons escaping from a system in which fission is occurring can be decreased by increasing the mass, i.e., by increasing the size at constant density of fissile material.* Since neutrons are produced by fission throughout the whole volume, whereas loss by escape takes place only from the exterior surface, it is evident that the escape probability will decrease as the volume-to-area ratio of the system is increased. This can be achieved, for a given geometry (shape), by increasing the dimensions of the fissile material at constant density.

1.18 In a very small mass of fissile material a self-sustaining chain reaction will not be possible, under normal circumstances, because of the large proportion of neutrons that escape. But as the size is increased (at constant density), the fraction of fission neutrons lost will decrease and ultimately a point is reached when one neutron will be available to carry on the fission chain for every neutron causing fission. The system is then said to be critical, and a self-sustaining chain reaction is just possible. If a system is smaller than the critical size (or mass), it is referred to as subcritical, and if larger, it is supercritical. In the latter case there are more neutrons available for fission at the end of any generation than were captured in fission reactions at the beginning of that generation. It will be seen shortly that the critical size (or mass) is dependent on the nature of the fissile material, its shape, and several other factors. However, for a given set of conditions, the critical size (or mass) has a definite value which can be determined by experiment or can sometimes be calculated.

Convergent, Stationary, and Divergent Chains

1.19 If ν is the average number of neutrons produced in each act of fission, for the existing neutron energy distribution (or neutron spectrum), and l is the number lost by escape and in other ways, e.g., by nonfission capture, then $\nu - l$ is the number of neutrons which can cause further fission; let this be represented by k , called the effective multiplication factor, i.e.,

$$k = \nu - l \quad (1.4)$$

Thus, for every neutron causing fission in one generation, k neutrons will cause fission in the next generation. Alternatively, k may be defined as the ratio of the number of neutrons in any one generation to the number in the preceding generation. Hence, in accordance with the statements made above, k is less than unity for a subcritical system; in a critical system $k = 1$; and in a supercritical system k is greater than unity.

1.20 Suppose S neutrons are introduced into a mass of fissile material and cause fissions to occur; then kS neutrons will be present in the next generation, k^2S in the third, and so on. Since, for a subcritical system, $k < 1$, it is evident that as g , the number of generations, increases, $k^g S$ will approach zero. In other words, the number of neutrons present will gradually decrease from one generation to the next, because more neutrons are lost in various ways than are being produced by fission. There is, consequently, a convergent or decaying chain which gradually dies out. For a system of critical size, $k = 1$ and then $k^g S$ is always equal to S . The number of neutrons thus remains constant from generation to generation; this is referred to as a stationary chain. Finally, if $k > 1$, as is the case for a supercritical system, $k^g S$ increases steadily. The fission chain is then said to be a divergent or expanding chain.

1.21 In the foregoing discussion no distinction has been made between the prompt and delayed fission neutrons. As stated earlier, however, it is essentially the prompt neutrons only which are significant in fission weapons. The effective critical size (or mass) of a weapon is

*The reason for specifying constant density of fissile material will be apparent later (§1.40).



into the fissile core. By reducing the fraction of neutrons which escape completely, a smaller size (or mass) can become critical. Such a scattering material, on account of its function, is sometimes referred to as a neutron reflector.

1.26 In nuclear weapons, the fissile material is surrounded by a tamper or, more specifically, an inertial tamper, the mass of which delays expansion of the exploding material and permits a higher energy yield to be obtained from the system undergoing fission, as will be seen later. This inertial tamper also serves as a neutron reflector or neutronic tamper. In some cases, however, the neutronic aspect is more important than the inertial character of the tamper.

1.27 As is to be expected, increasing the thickness of the tamper decreases the escape of neutrons and thus makes possible a smaller critical mass of the core of fissile material. However, it has been shown by calculations and verified experimentally that when the neutronic tamper thickness reaches a certain value, there is little more to be gained by a further increase of thickness (Fig. 1.2). Thus, when the thickness is about two neutron scattering mean

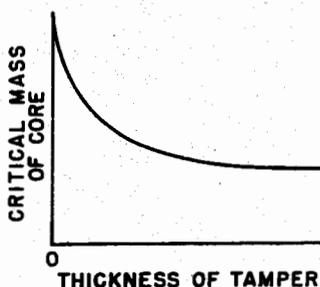


Figure 1.2

free paths, the effectiveness in decreasing the critical mass is within a few percent of that for an infinitely thick tamper.* In natural uranium, which is sometimes used as a tamper, the scattering mean free path of fast (1 Mev) neutrons is about 4 cm, i.e., 1.6 in., in metal of normal density. The value is proportionately less in compressed uranium of higher density. In weapons of low mass, beryllium is a common tamper material; the scattering mean free path is somewhat longer than in uranium because of the lower density.

1.28 Another important factor which affects the critical size is the energy (or speed) of the neutrons causing fission. For several reasons, some of which will be explained later, nuclear weapons are designed so that the fission chain is maintained by fast neutrons, with energies in the range of approximately 0.1 to 2 Mev. In the subsequent treatment it will be assumed, therefore, that fast-neutron fission makes the main contribution to the chain reaction.

Determination of Critical Mass

1.29 Critical masses can now be calculated with a fair degree of accuracy, provided all the conditions are known exactly. It is desirable, however, to check these values by experimental measurements. Because of the danger involved in handling critical assemblies, the general procedure is to extrapolate from observations made on a number of subcritical systems of increasing mass.

1.30 It was seen in §1.20 that the introduction of S neutrons into a fissile material results in the presence of kS neutrons in the first generation, k^2S in the second, and so on. If a

*The scattering mean free path is the average crow-flight distance a neutron travels before undergoing a scattering collision with a nucleus in the given tamper material.


will be little or no explosion, since the neutron density will not increase rapidly and energy, resulting from fission, will not be produced fast enough; the reasons for such behavior will be apparent later. On the other hand, if uranium-235 is used in a gun-type weapon, the neutron background is very small and there is little probability of premature initiation, or "preinitiation," as it is called, immediately upon the system becoming critical. When maximum supercriticality is attained, neutrons are introduced deliberately from a suitable source to initiate the fission chain reaction. In this way, the optimum efficiency can be realized in the use of the fissile material.

Compression Method (Implosion Weapon)

1.39 Because of the probability of preinitiation, and low efficiency, of a gun-assembly weapon using plutonium-239, an alternative method for attaining criticality (or supercriticality) was developed, based on the compression of the subcritical fissile mass. This procedure turned out to be so successful and gave so much better efficiency that the gun-type of assembly has been utilized only in a relatively few weapons for special purposes, e.g., in artillery-fired shells and in rugged, impact-resistant bombs designed to penetrate some distance into the ground before exploding. Apart from these particular cases, the compression method is invariably used to attain supercriticality in fission weapons.

1.40 The principle of the method is that if a mass of fissile material is compressed, the rate of production of neutrons by fission in the subcritical state is essentially unchanged, since it depends mainly on the number of nuclei present. Actually, there will be some increase in the neutron production in convergent chains. On the other hand, the number of neutrons lost by escape is decreased as a result of compression because of the smaller surface area of the given mass. Consequently, a quantity of material which is subcritical in the normal state can become supercritical when compressed. The introduction of neutrons to initiate the fission chain at (or close to) the time of maximum compression—and, hence, of maximum supercriticality—results in an efficient use of the fissile material in causing an explosion.


1.41 In practice, the compression occurs very rapidly.

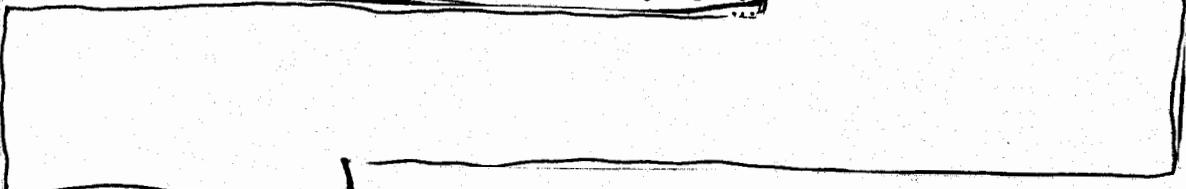

DOE
6(3)

1.42 The compression in these weapons is achieved by the use of a powerful conventional (chemical) high explosive which surrounds the core of fissile material. By the use of explosive charges of special design much of the energy of the explosion is directed inward, thereby causing the material in the interior to be compressed in a spherically symmetric manner. It is for this reason that the term "implosion" is applied to weapons of this type.

1.43 An approximate derivation of the relationship between the degree of compression and the critical mass of fissile material is the following. In accordance with the definition given in §1.27, footnote, the total mean free path of a neutron is the average (crow-flight) distance it travels before it interacts in any way with a nucleus. The proportion of neutrons which do not interact but escape from the system may be expected to be determined by the ratio of the dimensions, e.g., the radius of a sphere, to the mean free path. It may be concluded, therefore, that for a given fissile (core) material, under specified conditions, the critical radius should be approximately proportional to the neutron mean free path; thus, if R_c is the critical radius and λ is the mean free path in the material,

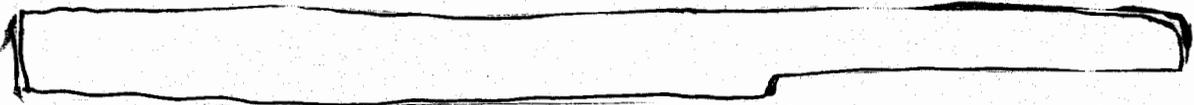

DOE
6(3)



$$R_c \propto \lambda \tag{1.6}$$

1.44 The greater the probability of the interaction of a neutron with a nucleus, the smaller will be the distance the neutron travels before interacting. Hence, the neutron mean free path is related inversely to its interaction probability. This probability is proportional to the number of fissile nuclei per unit volume, and hence to the density; if ρ is the density of the core material, then

$$\lambda \propto \frac{1}{\rho} \tag{1.7}$$

It follows therefore from equations (1.6) and (1.7) that

$$R_c \propto \frac{1}{\rho} \tag{1.8}$$

1.45 The critical mass, M_c , is equal to the product of the critical volume, which is $\frac{4}{3} \pi R_c^3$, and the density of the fissile material; hence,

$$M_c = \frac{4}{3} \pi R_c^3 \rho$$

Upon substituting equation (1.8) for R_c , it is seen that

$$M_c \propto \frac{1}{\rho^2} \tag{1.9}$$

The density of the material is dependent upon the degree of compression; thus, if η is the compression ratio, i.e., the ratio of the volume before to that after compression, then

$$\rho \propto \eta$$

and substitution in equation (1.9) leads to the result

$$M_c \propto \frac{1}{\eta^2} \tag{1.10}$$

The critical mass of a given fissile material, under specified conditions, is thus inversely proportional to the square of the compression ratio. The proportionality constant is readily derived by writing M_{c0} for the critical mass of the uncompressed material, i.e., when $\eta = 1$. It follows then from equation (1.10) that

$$M_c = \frac{M_{c0}}{\eta^2} \tag{1.11}$$

1.46 An alternative way of stating this result is in terms of the number of crits (or critical masses), C , present in the compressed core. If M is the actual mass of fissile material, the number of crits in the compressed state is defined by

$$C = \frac{M}{M_c}$$

Combination with equation (1.11) then yields

$$C = \frac{M\eta^2}{M_{c0}} = C_0\eta^2 \quad (1.12)$$

where M/M_{c0} has been replaced by C_0 , the number of crits before compression

The introduction of neutrons into this highly supercritical system resulting from compression will cause a very rapidly divergent fission chain reaction to develop. In these circumstances there is very efficient use of the fissile material for the release of energy. It is the high degree of supercriticality (and increased efficiency) attainable by compression that constitutes the great advantage of implosion-type weapons over those of the gun type.

1.47 Strictly speaking, the relationship of the number of crits to the square of the compression holds only for a bare core. For a tamped core, a more correct form of equation (1.12) is

$$C = C_0\eta_c^{1.2}\eta_t^{0.8}$$


where η_c is the compression of the core and η_t is that of the tamper. Since the tamper is generally compressed less than the core, a good approximation for weapons is to write

$$C = C_0\eta_c^{1.7}$$


The effect of compression is still substantial, although not as large as is implied by equation (1.12).

Fusion Reactions in Fission Weapons


1.48 It was stated in §1.2 that the large-scale release of energy in weapons is possible by making use of fusion reactions in which two very light nuclei combine (or fuse) together to form particles of greater mass. However, apart from the application of nuclear fusion reactions as a source of energy, described in Chapter 7, certain fusion processes are important in the design of fission weapons for another reason. The significance of these reactions does not lie in the energy released but in the neutrons which are produced. Three fusion reactions, involving the less common isotopes of hydrogen, namely, deuterium (D^2) and tritium (T^3), are of interest in this connection. Two of these reactions are between pairs of deuterium nuclei (deuterons) only, i.e.,



and



which take place at about the same rate, and the third is a much more rapid interaction between a deuteron and a tritium nucleus (triton), i.e.,



1.49 It is seen that when two deuterons interact, a neutron is formed in one case and a triton in the other; the triton then readily reacts with a deuteron to produce another neutron. Both deuteron-deuteron (D-D) and deuteron-triton (D-T) reactions are employed to provide

neutrons for initiating fission chains. In addition, the high-energy (14 Mev) neutrons liberated in the D-T reaction are used in many fission weapons to achieve what is known as "boosting." Neutrons from the D-T reaction are introduced at a later stage of the fission chain in order to maintain and enhance the progress of the fission reactions. There is a considerable increase in the energy released because of the greatly improved efficiency in utilization of the fissile material. The energy contributed by the D-T fusion reaction is quite small in comparison with that from fission.

PRODUCTION OF WEAPONS MATERIALS

Uranium-235

1.50 The two important fissile materials, namely, uranium-235 and plutonium-239, are both produced from natural uranium but by entirely different procedures. Ordinary uranium contains about 0.7 percent of uranium-235, together with about 99.3 percent of uranium-238 and a trace (0.006 percent) of uranium-234. The proportion of uranium-235 is increased by a process involving diffusion or, more correctly, effusion through porous barriers of the vapor of uranium hexafluoride (UF_6) made from natural uranium. The hexafluoride of the lighter isotope diffuses more rapidly than does that of the heavier species, and by the use of several thousand diffusion stages enrichments of over 90 percent are obtained, i.e., the material produced contains over 90 percent of uranium-235. The most common product for weapons use consists of about 93.5 weight percent uranium-235, the remainder being mainly uranium-238 and a small proportion of uranium-234. This product is commonly known as "oralloy," the two initial letters standing for Oak Ridge, where the material was first made in quantity.*

DOE
6(3)

1.51 The highly enriched uranium hexafluoride obtained from the gaseous diffusion plant is converted into the tetrafluoride (UF_4) by reduction with hydrogen (mixed with some fluorine). The tetrafluoride, which is a solid with a high melting point (close to $1000^\circ C$), is mixed with calcium and heated in a closed steel vessel lined internally with a refractory material. The calcium reduces the uranium tetrafluoride to uranium metal which is separated from the slag of calcium fluoride. Volatile impurities are removed by heating the liquid metal in a vacuum and the resulting product is of a high degree of purity.

1.52 The residual material from the isotope separation (gaseous diffusion) plant consists of uranium hexafluoride which has been depleted in uranium-235. In other words, it contains more than the normal 99.3 percent of uranium-238. This is converted into uranium metal by a procedure similar to that described above. It is referred to as depleted uranium or, in the weapons program, as D-38. At one time it was called Q-metal, but this name is not now in common use.


Plutonium-239

1.53 The element plutonium does not occur in nature, except in insignificant traces. Consequently, the plutonium-239 used in weapons is obtained artificially by a series of nuclear reactions resulting from exposure of uranium-238 to slow neutrons in a nuclear reactor. A nuclear reactor is a device in which a fission chain reaction is taking place in a controlled manner, as against the deliberately uncontrolled chain reaction in a weapon. If a material of low mass number, called a moderator, is present, in addition to fissile material, the fission neutrons are slowed down. Such a nuclear reactor is thus a good source of slow neutrons.


*The "alloy" part of the name originated from the designation Tube Alloys Limited applied to the British wartime atomic energy project. Natural uranium metal was thus called "tuballoy," a term still in common use, and then oralloy was adopted for the uranium-235 enriched material.

Handwritten scribbles and markings at the bottom of the page.

1.54 Uranium-238 nuclei capture slow neutrons quite readily to form a higher isotope, uranium-239, with the emission of gamma radiation; thus, the (n, γ) reaction




occurs, where the subscripts give the atomic numbers and the superscripts the mass numbers in each case; the neutron (${}_0\text{n}^1$) has a charge (atomic number) of zero and a mass of unity. The uranium-239 produced by neutron capture is radioactive, with a half-life of 23 min, emitting a beta particle. Representing the latter by ${}_{-1}\beta^0$, since it carries a unit negative charge and has essentially no mass, the radioactive decay process may be written as



the product being an isotope of mass number 239 of an element of atomic number 93. This element called neptunium (Np), is virtually nonexistent in nature.

1.55 neptunium-239 is also radioactive with a half-life of 2.3 days; it emits a beta particle according to the reaction



so that the product has a mass number of 239 and an atomic number of 94. The name plutonium, symbol Pu, has been given to the element with this atomic number. The isotope plutonium-239 is an alpha-particle emitter with a fairly long half life—about 24,000 years—so that it is relatively stable. It may be mentioned that the decay product of plutonium-239 is the fissile uranium-235, which has a half-life of about 9×10^8 years. Hence, as far as fission is concerned, plutonium-239 could be stored for thousands of years with only minor deterioration. The little deterioration which does occur arises mainly from the fact that the average number of neutrons, ν , produced by fission of uranium-235 is somewhat less than that from plutonium-239 (§1.12).

1.56 For the production of plutonium-239, natural uranium metal is used as the fuel material in a nuclear reactor with graphite (Hanford) or heavy water (Savannah River) as the moderator. The uranium-235 in the fuel sustains the fission chain reaction and produces neutrons, some of which are captured by the uranium-238 with the consequent formation of plutonium-239, as described above. After being in the reactor for an appropriate time, the "spent" fuel is removed, dissolved in nitric acid, and the plutonium is extracted from the solution by the use of certain organic solvents. It is then re-extracted into a water medium to give an aqueous solution of the nitrate, from which the plutonium is precipitated either as the peroxide or the oxalate. The solid compound is separated and heated with a mixture of hydrogen fluoride gas and oxygen to obtain plutonium tetrafluoride (PuF_4). The latter is finally reduced to plutonium metal with calcium (plus iodine).

1.57 Metallic plutonium exists in six different allotropic forms between room temperature and the melting point (640°C). The temperature ranges over which the various forms (or phases) are stable are shown in Table 1.3. It is seen that alpha-plutonium, referred to in §§1.23 and 1.34, which has a density of 19.6 g/cm³, is stable at ordinary temperatures. The high density is advantageous from certain weapon standpoints, since it permits attainment of criticality in a smaller mass than is possible with other forms of plutonium (cf. Table 1.2). On the other hand, alpha-plutonium is brittle and difficult to fabricate. Furthermore, the presence of certain impurities retards the attainment of the alpha-phase equilibrium, so that fabricated parts exhibit dimensional instability. However, if these impurities are avoided, the dimensional instability problem does not arise.

1.58 Although delta-plutonium is normally stable in the temperature range of 319 to 451°C, the addition of 1 weight percent of gallium to plutonium stabilizes the delta phase at or


dinary temperatures. The plutonium used in most stockpile weapons is in the stabilized delta form. The material is much less brittle and easier to fabricate than alpha-plutonium: in fact delta-plutonium is said to resemble aluminum in this respect whereas the alpha-phase is more like cast iron. Delta-plutonium was used in the earliest implosion weapons because its low density permitted the use of a larger mass of subcritical fissile material (Table 1.2), thereby making possible an increase in the total energy yield. This aspect of weapons design is, however, no longer significant.

Table 1.3—Properties of Solid Phases of Plutonium

Phase	Stability range	Density (g/cm ³)
Alpha (α)	Up to 120°C	19.6 (25°C)
Beta (β)	120 to 206°C	17.8 (150°C)
Gamma (γ)	206 to 319°C	17.2 (210°C)
Delta (δ)	319 to 451°C	15.9 (320°C)
Delta prime (δ')	451 to 476°C	16.0 (465°C)
Epsilon (ε)	476 to 640°C (m.p.)	16.5 (510°C)

Plutonium-240

1.59 As the plutonium-239 accumulates in the reactor in which it is produced, it also captures neutrons, the rate of capture being proportional to the neutron density (or flux) in the reactor and to the concentration of plutonium-239 nuclei. The reaction which takes place is



the product being plutonium-240, an alpha emitter of about 6600 years half-life. The two isotopes of plutonium are not separated from one another in the chemical process used for the extraction of this element from the reactor fuel. Hence, plutonium-239 is always associated with a certain proportion of plutonium-240, the amount of the latter increasing, with both the exposure time and neutron density in the reactor, up to a limiting value of about 35 percent.

1.60 In a simple (unboosted) implosion type weapon, it is desirable that the plutonium-240 content be as small as possible for two reasons: (a) the high spontaneous fission rate of plutonium-240 causes a large neutron background (§1.37) which can result in the initiation of a fission chain before the optimum time, and (b) the fission of plutonium-240 requires mostly neutrons of high energy and, in addition, the ν value is smaller than for plutonium-239 so that it acts, to some extent, as an inert diluent.* Consequently, if plutonium-240 is present, the mass of plutonium-239 required for criticality is larger than would be the case for pure material (§1.23).

It should be noted that to obtain a product with a small proportion of plutonium-240, the uranium fuel elements can be permitted to remain in the reactor for only a short time before they are removed and processed for the extraction of plutonium. As a result, the smaller the plutonium-240 content, the higher the cost of the material produced.


1.61 In evaluating the cost of the plutonium in a weapon, it must be recognized that the higher the plutonium-240 content the smaller the cost per unit mass of plutonium-239, but the larger the mass required for criticality. The actual cost per crit, which is the important cri-

*Fission of plutonium-240 exhibits an appreciable resonance for neutrons of about 1-ev energy. Otherwise, the cross sections are low except at high neutron energies.


DOE
b(3)

Production of Neutrons


1.65 In a fission weapon, the chain reaction is initiated by the introduction of neutrons into a critical or supercritical system. Consequently, the general methods for producing neutrons in weapons will be reviewed here. One of the simplest procedures for obtaining neutrons is by the action of alpha particles on certain light elements, notably beryllium; processes of this kind are referred to as (α, n) reactions. Recalling that the alpha particle is actually a helium nucleus, the reaction is represented by



1.66 A convenient source of alpha particles, which was used extensively at one time in fission weapons, is the radioelement polonium-210. This isotope has certain advantages, associated with corresponding drawbacks. It does not emit gamma rays, so that there is no neutron production by the (γ, n) reaction which might otherwise occur even when the polonium-210 and beryllium are separated in such a manner as to prevent access of alpha particles to the latter. Moreover, the polonium-210 is easy to produce by exposure of ordinary bismuth to neutrons in a nuclear reactor, when the (n, γ) reaction




takes place. The bismuth-210 is a beta emitter with a half-life of 5 days, so that it soon decays to form polonium-210; thus,



However, the production of polonium-210 in this manner means that fewer neutrons are available for the conversion of uranium-238 into plutonium-239.

1.67 The moderately short half-life of polonium-210—138.4 days—means that it emits alpha particles rapidly and a small quantity can thus provide a strong neutron source in conjunction with beryllium. But the short half-life is also a serious disadvantage, because the activity falls off relatively rapidly. In one year, the alpha activity, and hence the rate of neutron production, will have decreased to 10 percent and in two years to 1 percent of its initial value.

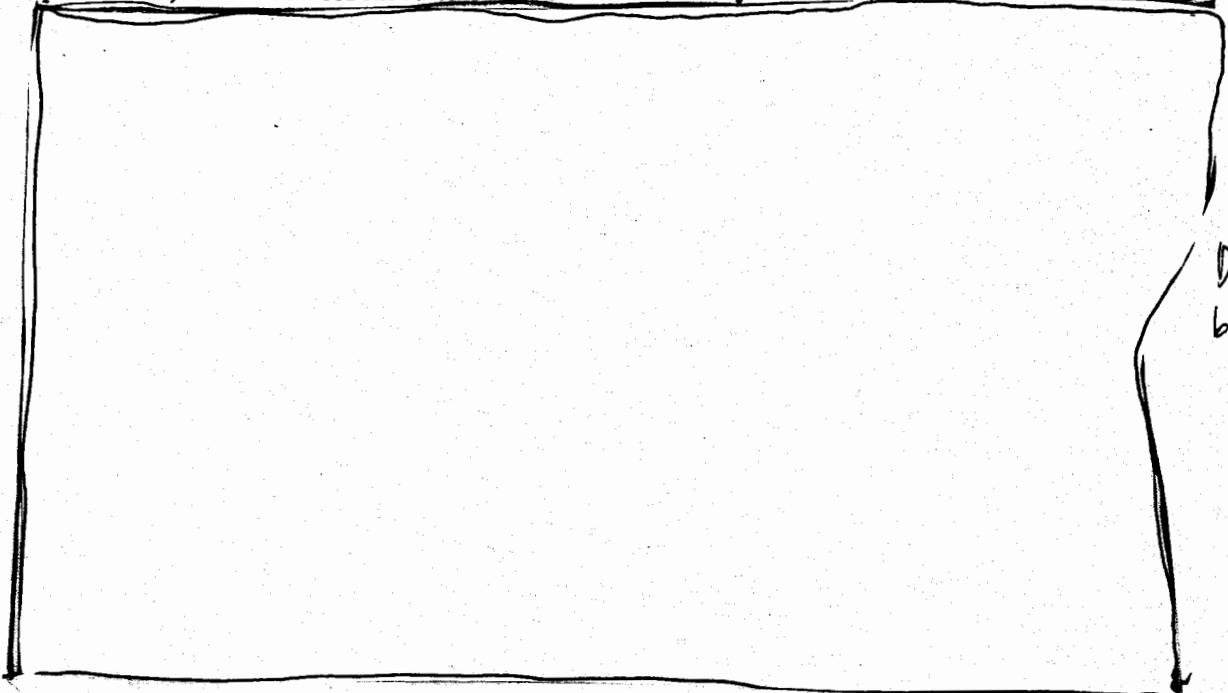

~~SECRET~~ 24

UNCLASSIFIED

DOE
b(3)

1.70 Neutrons can also be produced by the action of gamma rays (or x-rays) of sufficient energy on various nuclei; these processes are referred to as photoneutron or (γ, n) reactions. Since the average binding energy of a nucleon in a nucleus is about 8 Mev in many cases (Fig. 1.1), a photon of this energy will eject a neutron from most nuclei. This fact was utilized in an experimental device for initiating the fission chain in nuclear weapons (§5.34).

1.71 In the great majority of weapons of recent design the neutrons required for initiation are produced by the fusion reactions described in §1.48. The procedures involve either the D-D or D-T reactions at high temperatures (thermonuclear reactions) or the interaction of accelerated tritons with a deuterium target (electronuclear reactions). The methods used for achieving these processes in weapons are described in Chapter 5.

Production of Deuterium and Tritium

1.72 Deuterium oxide (heavy water) is present to the extent of about one molecule in 6500, i.e., 0.015 mole percent, in ordinary water. In spite of this very small proportion, concentration of the deuterium in water is not too difficult, and heavy water of about 99.75 percent purity, i.e., 99.75 mole percent D_2O , is now produced on a large scale.


1.73 Three main processes are used to separate the two hydrogen isotopes in water; these are (a) isotopic (or chemical) exchange, (b) distillation, and (c) electrolysis. Several isotope exchange processes have been considered but the most satisfactory appears to be one involving reaction between hydrogen sulfide gas and liquid water. The exchange reaction results in a relatively higher proportion of deuterium in the liquid phase than in the gas. By utilizing a countercurrent flow of gas and liquid in several stages, in a system operating at two different temperatures, considerable enrichment in deuterium can be achieved in the liquid.

1.74 The distillation method for separating the isotopes of hydrogen depends on the fact that heavy water (D_2O) has a slightly higher boiling point, i.e., slightly lower vapor pressure, than light water (H_2O). Consequently, a partial separation can be achieved by fractional distillation, preferably under reduced pressure.


1.75 When an acid or alkaline aqueous solution is electrolyzed, the hydrogen gas liberated at the cathode contains relatively more of the lighter isotope (H_2) than does the residual water. By repeated electrolysis in stages, heavy water of a high degree of purity can be obtained.

1.76 Each of the three foregoing procedures has certain advantages under appropriate conditions. Hence, in the production of heavy water in quantity, ordinary water is first partially enriched in deuterium by the isotopic exchange process with hydrogen sulfide. The deuterium is further concentrated by fractional distillation of the enriched water under reduced pressure, and then it is brought up to 99.75 percent purity by electrolysis. Deuterium gas can be released from heavy water by any of the familiar chemical processes used to prepare hydrogen gas. It can then be very simply converted into any compound that may be required, e.g., uranium deuteride (UD_3) or lithium deuteride (LiD), for weapons applications.

1.77 The third isotope of hydrogen, i.e., tritium, is a radioactive beta emitter, with a half-life of 12.26 years. It is found in natural waters to an insignificant extent only and the cost of extraction would be prohibitive. Consequently, tritium is produced by nuclear reactions resulting from the exposure of lithium (as a suitable compound) to neutrons in a reactor. The less abundant lithium-6 isotope, present to the extent of 7 atomic percent in natural lithium, readily captures slow neutrons and undergoes the (n, α) reaction



with the formation of tritium. The more common isotope, lithium-7, reacts with fast neutrons to some extent and this process also leads to the production of tritium; thus,



1.78 After irradiation by neutrons for a length of time, the lithium compound is removed from the reactor and the gases, consisting mainly of tritium and helium, with other hydrogen isotopes as impurities, are separated from the residual solid. Purification is achieved by a gaseous diffusion process. Compounds of tritium can be prepared from the gas by reactions similar to those employed for deuterium and ordinary (light) hydrogen.

CHAPTER 2

THE FISSION PROCESS IN WEAPONS

INCREASE OF NEUTRON POPULATION

The Multiplication Rate: Alpha

2.1 No matter how it originates, an explosion is associated with the very rapid liberation of a large amount of energy within a restricted space. If the energy is to be produced by fission, then an essential condition for explosion is a very high neutron density, since the rate of fission, and hence the rate of energy release, is proportional to the number of neutrons per unit volume. It is of interest, therefore, to examine the factors which lead to a high neutron density, since these will form a basis for fission weapon design.

2.2 In accordance with the definition of the effective multiplication factor, k , given in §1.19, it follows that for every n neutrons present at the beginning of a generation there will be nk neutrons at the beginning of the next generation, so that the gain of neutrons is $n(k - 1)$ per generation. The rate of gain, dn/dt , may then be obtained upon dividing the actual gain by the average time, τ , between successive fission generations; hence,

$$\frac{dn}{dt} = \frac{n(k - 1)}{\tau} \quad (2.1)$$

Equation (2.1) will be strictly correct only if delayed neutrons play no part in maintaining the fission chain. As already stated (§1.13), this condition is applicable, to a good approximation, to nuclear fission weapons.

2.3 The quantity $k - 1$, which is the excess number of available neutrons per fission, may be represented by x , i.e.,

$$x \equiv k - 1 \quad (2.2)$$

and then equation (2.1) becomes

$$\frac{dn}{dt} = \frac{x}{\tau} n \quad (2.3)$$

The time rate of increase (or decrease) in neutron population can be expressed in the general form

$$\frac{dn}{dt} = \alpha n \quad (2.4)$$

where α is the specific rate constant for the process which is responsible for the change in the number of neutrons. In nuclear weapons work this constant is called the multiplication rate or merely "alpha." Comparison of equations (2.3) and (2.4) shows that for a fission chain reaction

$$\alpha = \frac{x}{\tau} \quad (2.5)$$

2.4 The foregoing results are applicable regardless of whether x , and hence α , is positive, zero, or negative. For a subcritical system, $k < 1$ (§1.20), i.e., $k - 1$ is negative; in these circumstances x is negative and so also is α . It follows from equation (2.4) that dn/dt is then negative and the number of neutrons in the system will decrease with time. Consequently, in agreement with previous conclusions, the fission chain in a subcritical system will eventually die out because of the steady decrease in the neutron population. When the system is just critical, $k = 1$, and x and α are both zero; the number of neutrons will thus remain constant. Finally, for a supercritical system, $k > 1$, and x and α are positive; there will then be a steady increase in the neutron population. Since dn/dt is proportional to n , by equation (2.4), it is evident that in a supercritical system, the number of neutrons will grow at increasingly faster rates as n increases.

2.5 Another aspect of the significance of α becomes apparent when equation (2.4) is written in the form

$$\frac{dn}{n} = \alpha dt$$

If α is assumed to remain constant, this expression can be readily integrated between the time limits of zero, when the number of neutrons present is n_0 , and t , when the number is n . The result is


$$n = n_0 e^{\alpha t} \quad (2.6)$$

where, as usual, e is the base of natural logarithms. This expression, like those given above, is applicable regardless of whether α is positive, zero, or negative. If α is known, equation (2.6) can be used to calculate the neutron population at any time t relative to the value at any arbitrary zero time. It can also be seen from equation (2.6) that $1/\alpha$ is the time period during which the number of neutrons changes by a factor e ; consequently, $1/\alpha$ is often referred to as the e -folding time, i.e., the time in which there is an e -fold change in the neutron population.

Determination of Alpha

2.6 The value of α is a highly important quantity in weapons design, as will shortly be apparent. Attempts are made to estimate it theoretically from the neutronic and hydrodynamic characteristics of the system, but there are many uncertainties involved and experimental measurements are desirable. In weapons tests, the determination of alpha is one of the most important diagnostic requirements. The methods used under these circumstances are described in Chapter 8. The present treatment will be restricted to procedures which can be used in the design phase without an actual test of the weapon.

2.7 Since a supercritical (or even a critical) mass cannot be handled safely under ordinary conditions, experimental measurements of α are made with a mass that is slightly subcritical. Into this assembly is injected a burst of neutrons and these neutrons initiate a large number of chains. However, since the system is subcritical, α will be negative and so the number of neutrons will decrease after the initial increase. By determining a quantity proportional to the neutron population as a function of time, with neutron counters located outside the assembly, it is possible to determine α by means of equation (2.6). The α obtained from the decrease in neutron population in the early stages is the so-called prompt value, required for weapons studies in which the delayed neutrons play no part.



2.13 The fission mean free path is equal to $1/N\sigma_f$, where N is the number of fissile nuclei per cm^3 and σ_f is the fission cross section.* Hence, from equation (2.8),

$$\tau \approx \frac{1}{N\sigma_f v} \quad (2.9)$$

so that the generation time is inversely proportional to the product $\sigma_f v$. The value of σ_f decreases as v increases but the product is 2×10^8 (in $10^{-24} \text{ cm}^2/\text{sec}$ units) for fast neutrons of 1-Mev energy compared with 10^8 for slow neutrons. Hence, the fission generation time is appreciably shorter for fast than for slow neutrons. Actually, the situation is worse for slow neutrons than would appear from a comparison of the values of $\sigma_f v$ because the effective generation time for these neutrons includes the slowing-down time and this is considerably longer than $\sigma_f v$ alone would indicate.

2.14 From the information already given, it is possible to make a rough, order-of-magnitude estimate of α . As seen from Table 1.1, ν is about 2.5 to 3; the loss, l , of neutrons per fission may be taken as 0.5 to 1, and so, by equation (2.2), x is close to unity for a highly supercritical system. For uncompressed uranium-235 or plutonium-239, the number, N , of nuclei per cm^3 is roughly 0.5×10^{23} and, as seen above, $\sigma_f v$ for fast-neutron fission is $2 \times 10^8 \times 10^{-24} \text{ cm}^2/\text{sec}$. It follows, therefore, from equation (2.7) and (2.9) that

$$\alpha \approx (0.5 \times 10^{23})(2 \times 10^{-16}) \approx 10^8 \text{ sec}^{-1}$$

Thus, for fast-neutron fission, α is about 10^8 sec^{-1} in a supercritical system and τ , the generation time, is roughly 10^{-8} sec (or 1 shake). It is the common practice to express values of α in reciprocal shakes, i.e., 10^8 sec^{-1} units, so that in the rough calculation made above α is approximately 1 shake $^{-1}$. Experimental measurements, both in the laboratory and at weapons tests, show that α is indeed of this order of magnitude.†

2.15 It is evident that in order to achieve an efficient nuclear explosion, fission should be brought about by fast neutrons, as far as possible. For such neutrons, the factors ν and τ , and to some extent l , favor a high value of α and, hence, a rapid increase in the neutron population. Except in certain special cases, appreciable amounts of elements of low mass number, which slow down neutrons, are consequently kept out of the core of a fission weapon.

2.16 According to equation (2.9), the fission generation time for neutrons of a given energy (or velocity) is inversely proportional to the number, N , of fissile nuclei per cm^3 . It follows, therefore, that τ is inversely proportional to η , the core compression ratio; thus

$$\tau \propto \frac{1}{\eta} \quad (2.10)$$

Consequently, the generation time can be decreased, and the value of α increased, by compression of the core material.

2.17 In addition to the effect on τ , compression also causes a marked decrease in l , for the reason given in §1.40. This also contributes to an increase in α , as follows from equation (2.7). It is seen, therefore, that compression of the core will cause an increase in α because of the decrease in both τ and l .

Explosion Time

2.18 According to the arguments in §2.14, x is approximately equal to unity and so, by equation (2.5), $1/\alpha$ is roughly equal to τ , the generation time. It is thus possible to write equation (2.6) in the approximate form

*For the present purpose it is sufficient to regard the cross section as the effective area in sq cm of a nucleus for a particular reaction (or reactions). Cross sections vary with the neutron energy and the fission cross sections for uranium-235 and plutonium-239 have been measured over a large energy range.

†Some workers prefer to express α in reciprocal microseconds.

$$n \approx n_0 e^{t/\tau} = n_0 e^g \quad (2.11)$$

where t/τ , represented by g , is the number of generations in which the neutron population increases from n_0 to n . This means that in a fission explosion the number of neutrons increases by a factor of e per generation, i.e., by a factor of 10 in every 2.3 generations; thus,

$$n \approx n_0 10^{g/2.3} \quad (2.12)$$

2.19 Before a fissioning system can explode, i.e., before the material begins to move outward, a certain energy density must be attained

[REDACTED] DOE b(3)

[REDACTED] (it was stated in §1.15 that the energy released per fission is equivalent to about 1×10^{10} e.v.) DOE b(3)

2.21 The liberation of the remaining energy requires an increase by a factor of 10^3 in the number of fissions, and this will occur in a time period of only about 7 generations ($10^{1/2.3} \approx 10^3$).

[REDACTED] DOE b(3)

Most of the energy, however, is liberated during the final few shakes. Even in a boosted weapon the overall situation is much the same.

[REDACTED] DOE b(3)

2.22 The foregoing calculations are not exact; for one thing it was assumed that the total number of fissions which have occurred by any particular time is equal to the neutron population at that time. Nevertheless, a more precise treatment leads to conclusions in general agreement with those reached above.

[REDACTED] DOE b(3)

Within this period, the core volume is assumed to remain essentially constant. In a pure fission system, although not in a boosted device, the value of α also remains roughly constant after initiation and it is this particular value which largely determines the efficiency of the weapon. During the next 5 to 10 generations, or so, depending on the total energy release, almost all of the energy is liberated. The resulting very high temperatures—several tens of million degrees—cause large pressures to develop within the core and thus rapid expansion occurs.

2.23 Soon after expansion commences, the fission chain reaction gradually dies out, because the increasing rate of neutron escape causes α to decrease and eventually to become negative.

[REDACTED] DOE b(3)

[REDACTED] (to attain a high efficiency, i.e., to consume as much as possible of the fissile

[REDACTED] DOE b(3)

material, expansion of the core should be delayed. This important function is fulfilled by the inertial tamper. In boosted weapons, the introduction of neutrons from an extraneous (D-T) source results in a considerable increase in the fission rate before the system expands appreciably. The inertial tamper is then less important than in an unboosted device.

2.24

In some weapons, however, there will be many neutrons present at the time of initiation. If, for example, there are 100 neutrons, i.e., 10^2 or $e^{4.6}$, there will be the equivalent of nearly 5 "generations" of neutrons at the start of the chain.

EFFICIENCY OF FISSION WEAPONS

Definition of Efficiency

2.25 The efficiency, ϕ , of any weapon may be defined as the ratio of the energy actually developed when it explodes, i.e., the energy yield, to the total energy available; thus,

$$\phi = \frac{\text{Energy yield}}{\text{Energy available}} \quad (2.13)$$

In other words, the efficiency is the fraction of the total energy available which is actually released in the explosion. In the case of a fission weapon, this is equal to the ratio of the quantity of fissile material which actually suffers fission to the total amount present in the weapon. The efficiency of a weapon is generally expressed as a percentage, and so it is equal to ϕ , as defined by equation (2.13), multiplied by 100. There are several factors which determine the efficiency and some of these will be discussed below.

2.26 It is of interest to mention, in passing, that the efficiency of the earliest implosion weapons was (51.36). This accounts for the fact that devices of the latter type have occupied a secondary place in the development of fission weapons, except for special purposes.

Calculation of Efficiency: Machine Methods

2.27 At the present time, the efficiency or, more correctly, the energy yield of a weapon is determined by machine calculations based on "codes" which have been developed to represent the behavior of the fission chain system.

From initiation up to this time, the material is essentially stationary or is still being compressed and only a small proportion of the total energy has been liberated. The treatment takes into account the neutronic behavior, the hydrodynamics, and heat flow; the motion of a series of concentric shells (or "mass points") is followed until the rate of energy release by fission has fallen almost to zero. The total yield includes the energy released after the system has expanded and become subcritical. Although self-sustaining chain propagation is no longer possible, convergent-chain interaction of the many neutrons and fissile nuclei still present will result in considerable energy production. This may amount to some 30 percent or more of the total yield.

The Bethe-Feynman Formula

2.28 Prior to the development of computing machine procedures, and before data were available from test explosions for comparison and normalization purposes, fission weapon

efficiencies were estimated by the method of Bethe and Feynman. The basic formula is admittedly approximate, since it involves several simplifying assumptions. However, its derivation is useful in the respect that it provides a model of the explosion of a fission weapon and indicates, qualitatively at least, some of the factors which affect the efficiency of the explosion. The treatment given below is applicable to pure fission systems and not after boosting occurs.

2.29 As a result of the energy liberated in fission, very large pressures ($\sim 10^9$ atm) are developed in the core, and the core-tamper interface consequently receives a large outward acceleration. This causes highly compressed tamper material to pile up just ahead of the expanding interface, in an effect referred to as the "snowplow" phenomenon, because of the similarity to the piling up of snow in front of a snowplow. The inertia of the compressed tamper delays expansion of the core, so that a considerable pressure gradient builds up from the center of the core to its outer surface.

2.30 Furthermore, because of the delayed expansion, it may be supposed that the volume of the compressed (supercritical) core remains essentially constant during the first [redacted] so generations following initiation of the fission chain, i.e., up to explosion time. After this interval, almost the whole of the energy is released within an extremely short period, during which time the supercritical core expands rapidly until it becomes subcritical. Although there is an appreciable release of energy even while the system is subcritical, as mentioned in §2.27, it will be postulated that energy production ceases when the dimensions are just critical. It will be assumed, further, that no energy escapes during the short period of expansion from maximum supercriticality to the point where the system becomes subcritical.

2.31 Let R be the radius of a spherical core at the point of maximum supercriticality; then, in accordance with the postulate made above, this will remain unchanged until explosion time. Subsequently, the energy density of the system becomes so large that mechanical effects begin and the core starts to expand. Suppose that when the core has expanded by a fraction δ , so that the radius is $R(1 + \delta)$, the system is just critical (Fig. 2.1); beyond this point it will be subcritical. The self-sustaining fission chain will then end and, in accordance with the approximation postulated above, there will be no further release of energy.

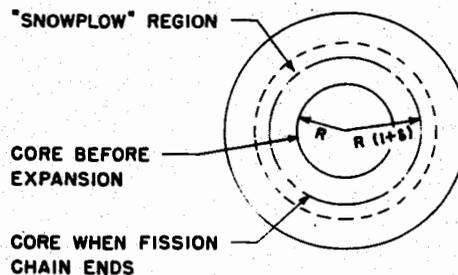


Figure 2.1

2.32 Consider a thin shell of material in the core, of volume dV and thickness dR ; the cross sectional area of the shell is then dV/dR . If dP is the pressure difference on the two sides of this shell, caused by the liberated fission energy, the net outward force, dF , to which the shell is subjected, i.e., pressure \times area, is then

$$dF = dP \frac{dV}{dR} = \frac{dP}{dR} dV \quad (2.14)$$

where dP/dR is the pressure gradient in the given shell. As a reasonable approximation, it may be supposed that the pressure gradient is essentially constant across the core radius, so that

~~SECRET~~

DOC
6(3)

$$\frac{dP}{dR} \approx \frac{P}{R} \quad (2.15)$$

where P is the total difference in pressure from the center of the core to the outer surface before expansion occurs. Hence, from equations (2.14) and (2.15),

$$dF \approx \frac{P}{R} dV \quad (2.16)$$

2.33 The time required for the core to expand from radius R to $R(1 + \delta)$, i.e., a distance of $R\delta$, is about 7 generations, as seen in §2.21. However, as a rough approximation, this may be taken as $1/\alpha$, where α is the multiplication rate just prior to explosion time. The mean outward acceleration of the core material, and of the shell dV , may consequently be expressed as $R\delta\alpha^2$. The mass of the shell is ρdV , where ρ is the core density; hence, by Newton's second law of motion, i.e., force = mass \times acceleration, the force dF acting on the shell is given by

$$dF \approx \rho dV \times R\delta\alpha^2$$

Upon comparing this result with equation (2.16), it is seen that

$$P \approx \rho R^2 \alpha^2 \delta \quad (2.17)$$

2.34 At the existing temperature the core will be gaseous and if, as postulated, the loss of energy from the system during the initial expansion is negligible, it may be considered as a gas undergoing an adiabatic process. The total energy of such a gas, which may be taken to be equal to the energy of the core, is then

$$E = \frac{PV}{\gamma - 1} \quad (2.18)$$

where γ is the ratio of the specific heats of the gas. Using equation (2.17) for P and writing M/ρ for the volume of the core, M being the mass, equation (2.18) becomes

$$E \approx \frac{MR^2 \alpha^2 \delta}{\gamma - 1} \quad (2.19)$$

2.35 If ϵ is the energy released in the complete fission of unit mass of core material, then the total energy available in the core is $M\epsilon$, and the efficiency, according to equation (2.13), is $E/M\epsilon$, where E is given by equation (2.19); consequently,

$$\phi = \frac{E}{M\epsilon} \approx \frac{R^2 \alpha^2 \delta}{(\gamma - 1)\epsilon} \quad (2.20)$$

It should be pointed out that in the foregoing derivation no allowance has been made for depletion of the core material as fission proceeds. For low efficiencies, to which most of the other approximations made are applicable, the depletion is not significant and can be neglected. Moreover, no allowance has been made for the inertial effect of the tamper on the efficiency. For the present purpose, which is to obtain a qualitative guide to some of the factors determining the efficiency, this can also be ignored. Hence, replacing the quantity $1/(\gamma - 1)\epsilon$ by a constant, K , equation (2.20) can be written as

$$\phi \approx KR^2 \alpha^2 \delta \quad (2.21)$$

[REDACTED] DOE b(3)

2.40 The avoidance of preinitiation was therefore an important aspect of the design of simple fission weapons. The neutron sources which served as initiators were constructed so as to produce a burst of neutrons as close as possible to the optimum time, and the neutron background from the fissile material was maintained within reasonable bounds. In all-plutonium cores, relatively clean (20 ngs) material was used and dirtier plutonium was employed only in composite cores which contained or alloy in addition, with the latter in excess. Such a utilization of fissile material was desirable in any event, for reasons given in §3.21 et seq.

2.41 The behavior of the solid core in an unboosted implosion weapon is somewhat as follows. [REDACTED] DOE b(3)

[REDACTED] At first critical, α is zero and it increases steadily as compression of the core proceeds. Just before maximum compression, when α is approaching its maximum value, neutrons are injected into the highly supercritical system. The divergent fission chain is initiated and energy is released. [REDACTED] DOE b(3)

[REDACTED] This condition is referred to as "second critical" (Fig. 2.2). Both the neutron density and the rate of the fission reaction are now at a maximum. Beyond second critical, α becomes negative and the neutron density decreases, in accordance with equation (2.6). Although a self-sustaining chain is no longer possible, considerable amounts of energy are produced by the convergent fission chains in the subcritical system. [REDACTED] DOE b(3)



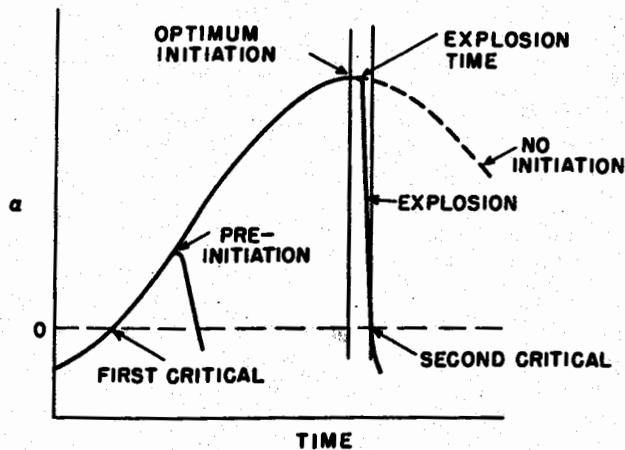


Figure 2.2

Boosted Implosion Systems

2.42 In modern boosted, implosion-type fission weapons, the situation is quite different from that described above. The cores are hollow, subcritical shells which contain the deuterium-tritium boosting gas. [REDACTED] DOE b(3)



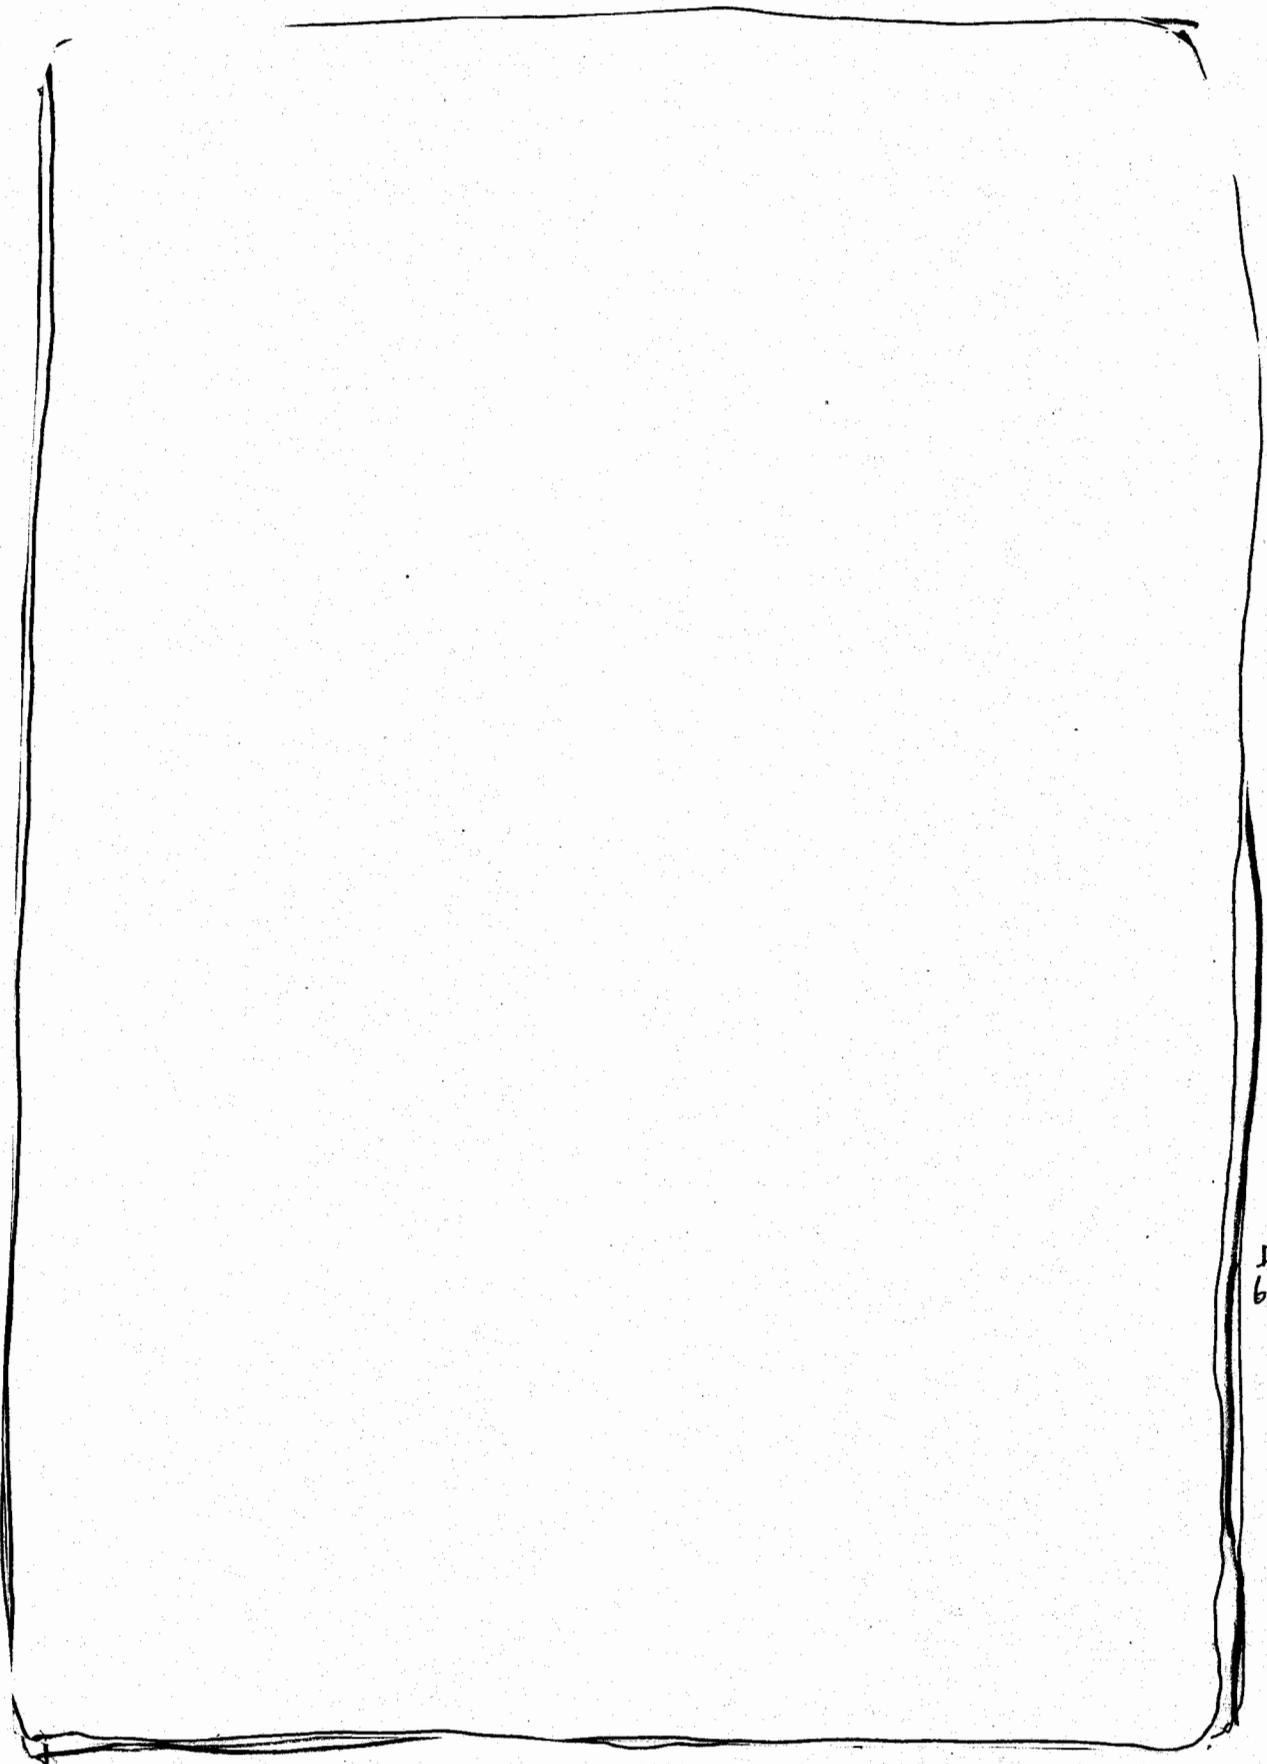

DOE
6(3)

~~SECRET~~

~~CONFIDENTIAL~~

UNCLASSIFIED

[Redacted]

DOE
b(3)

Gun-Type Weapons

2.45 In a gun-type weapon, the lack of compression makes it desirable for initiation to take place at or close to the time when assembly

[Redacted]

DOE
b(3)

Consequently, although plutonium-239 with an appreciable proportion of plutonium-240 could be used in implosion systems, even of the solid-core, unboosted type, it is unsuitable for gun-assembly devices, as the calculations given below will show.

2.46 Apart from the possible presence of a "flood" of neutrons, e.g., as the result of the explosion of another nuclear weapon in the vicinity of a given weapon, the chief sources of background neutrons, which could cause preinitiation in a gun-assembly weapon, are spontaneous fission and (α, n) reactions with light elements. In uranium-235 (or alloy) the rate of spontaneous fission is relatively small but (α, n) reactions with light-element impurities could produce an appreciable neutron background.

[Redacted]

DOE
b(3)

2.47 Let P_1 be the probability that a background neutron will be available in the fissile material during the period that it is supercritical, i.e., in the preinitiation period, and let P_2 be the probability that this neutron will be able to start a fission chain. The preinitiation probability, P , is then given by

$$P = 1 - e^{-P_1 P_2} \approx P_1 P_2 \tag{2.22}$$

the approximate form being applicable when $P_1 P_2$ is small, as it is in cases of interest. Actually P_2 is a function of time and both P_1 and P_2 depend, to some extent, on the position of the neutron and on other factors. For the present purpose, however, which is to draw general conclusions only, specific values will be assigned to P_1 and P_2 . A background neutron entering a fissile assembly may escape altogether without being absorbed, or it may be captured in a nonfission reaction, or it may initiate a fission chain. Although the probabilities of these three processes are by no means equal, it is sufficient to postulate here that P_2 has a constant average value of 0.3 over the preinitiation period. Hence, for the purpose of making rough estimates, equation (2.22) may be written as

$$P \approx 0.3 P_1 \tag{2.23}$$

[Redacted]

DOE
b(3)



~~RESTRICTED~~ UNCLASSIFIED

~~RESTRICTED~~

~~RESTRICTED~~ UNCLASSIFIED